DT10

Track Dumpers





Confined area material handling


Wacker Neuson's DT10 track dumper is an excellent material handling solution for smaller jobs that need the advantages of a tracked machine. The compact machine is designed for smooth travel while maneuvering across rough terrain and over curbs. The DT10 is designed for high performance and lower cost of ownership.

- Hydrostatic drive provides for easy and comfortable operation without the need to change gears
- Quickly unload materials with precision with the choice of front tip skip with self-loading shovel, swivel tip skip or front tip skip platform
- Engine hood can be folded down for complete access to daily maintenance points for quick and easy servicing
- The rubber tracks and the optimum weight distribution reduce the ground pressure to prevent damage to sensitive surfaces and provides added stability
- Compact design for confined areas and can fit through narrow garden gates and doorways making them ideal for landscape, concrete, demolition, residential and rental applications

DT10 Technical specifications

	Front tip skip w/ self loading shovel	Front tip skip platform	Swivel tip skip
Operating data			
Shipping weight Ib	1,532	1,301	1,708.5
Payload max. lb	2,645	2,645	2,645
Skip capacity leveled US gal	103.83	79.2	113.9
Skip capacity heaped US gal	117.83	55.5	121.5
LxWxH in	72 x 33 x 50	74 x 32 x 50	77 x 28 x 50
Engine / Motor			
Engine / Motor type	Kubota	Kubota	Kubota
Engine performance Diesel hp	13	13	13
at rpm rpm	3,600	3,600	3,600
Travel speed mph	2.5	2.5	2.5
Gradeability %	36	36	36
Fuel tank capacity US gal	2.5	2.5	2.5

DT10 Dimensions

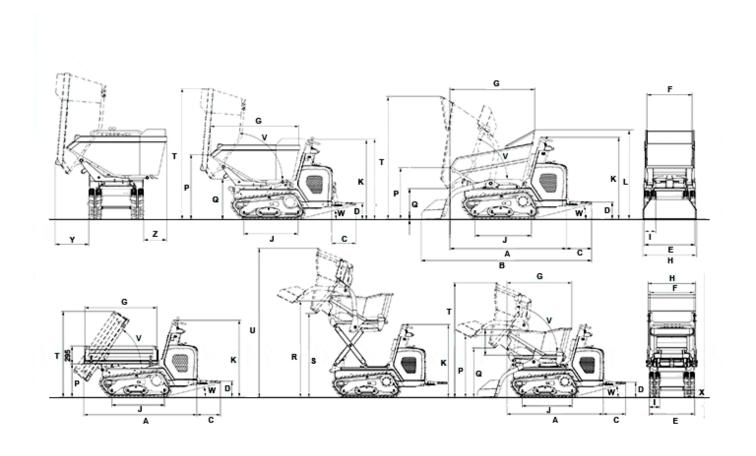

	Front tip skip			
Swivel tip skip	Front tip skip platform			
Length (w/o operator stand board)				
70.92 in		74.15 in		
Length with self-loading system (w/o operator star 89.32 in	nd board)			
Length operator stand board				
15.48 in		15.48 in		
Height above stand board				
10.44 in		10.44 in		
Width undercarriage				
31.13 in		31.13 in		
Skip width				
27.58 in		31.76 in		
Skip length				
52.01 in		47.28 in		
Width with self-loading system				
32.7 in				
Chain width				
7.09 in		7.09 in		
	Length (w/o operator stand board) 70.92 in Length with self-loading system (w/o operator start 89.32 in Length operator stand board 15.48 in Height above stand board 10.44 in Width undercarriage 31.13 in Skip width 27.58 in Skip length 52.01 in Width with self-loading system 32.7 in Chain width	Swivel tip skip Front tip skip platform Length (w/o operator stand board) 70.92 in Length with self-loading system (w/o operator stand board) 89.32 in Length operator stand board 15.48 in Height above stand board 10.44 in Width undercarriage 31.13 in Skip width 27.58 in Skip length 52.01 in Width with self-loading system 32.7 in		

J	Length track rise		
		34.47 in	34.47 in
K	Height over control console		
		50.43 in	50.43 in
L	Height		
		53.78 in	
Р	Height of skip front edge		
		31.68 in	33.45 in
Q	Dump height max.		
		18.68 in	10.09 in
Т	Height skip raised		
		75.06 in	56.34 in
V	Dump angle		
		70 °	56 °
W	Bucket rollback operator		
		14 °	14 °
Υ	Dumping distance		
		19.19 in	
X	Ground clearance		
		6.78 in	6.3 in
Z	Rear overhang		
		13.28 in	

Please note: that product availability can vary from country to country. It is possible that information / products may not be available in your country. More detailed information on engine power can be found in the operator's manual; the stated power may vary due to specific operating conditions. Subject to alterations and errors excepted. Applicable also to illustrations.

Copyright © 2020 Wacker Neuson SE.