



Features

- 4-in-1 RGBW LED's with 3000K warm white
- Lumen output ranging up to 300Lm per foot
- Optic options include a 30° & 30°x50° beam pattern
- Cuttable every 12" with 33ft max run (Factory assembled)
- Measures only 22mm (0.86") wide by 9.5mm (0.37") tall
- Features fully encased IP67 rating suitable for outdoor use
- cULus Listed for indoor and outdoor use
- 50,000 hours rated life

Available CCT



RGBW

Control Options

- DMX Controls
 - Requires Adaptive Driver + DMX Receiver
- RGBW In-line Controller
- Spektrum+™ Smart Receiver (App Controlled)

Listing / Ratings




Sēnik Flex RGBW

Senik Flex is a high performance optic based flexible linear light that allows for beam control in wall washing and grazing distributions for limitless design scenarios. Fully encased and rated for outdoor use, Senik Flex RGBW is a perfect option for creating colorful facades when installation space is limited, and flexibility is a must.

Technical Information

Series	SFLEX
Input Voltage	24V DC
CCT	RGBW (3000K)
Wattage	Up to 5.8W per foot
Lumens	Up to 300Lm per foot
Max Run	33ft
Cuttable	Every 12in (Custom Cut Only)
IP Rating	IP67 - Wet Location
Dimmable	5-100%
Rating	cULus Listed
Rated Life	50,000 hrs

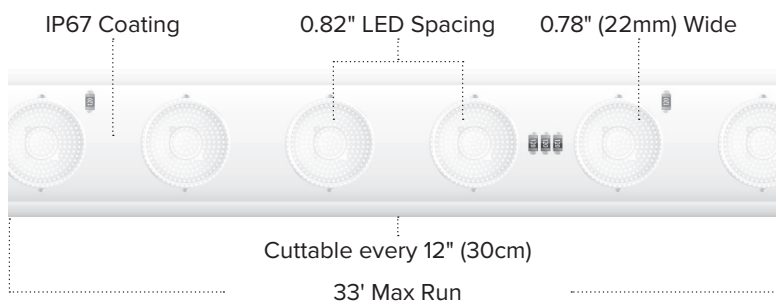

SĚNIK FLEX RGBW ORDERING INFORMATION

Custom Cut Lengths Available - Please Allow Up To 2-4 Weeks Order Processing & Delivery


ITEM NUMBER	VOLTAGE	CCT	LENGTH	OPTICS	LUMENS / FT	WATTAGE / FT	IP RATING	CUTTING
SFLEX-R30-24V-RGBW-CC	24V DC	RGBW	Custom Cut	30°	290Lm/ft	5.8W/ft	IP67	12"
SFLEX-A30X50-24V-RGBW-CC	24V DC	RGBW	Custom Cut	30°x50°	300Lm/ft	5.8W/ft	IP67	12"

Custom Cuts: Specify desired length according to cut increment. Order (1) Power CONKIT and (1) End Cap per length of Senik Flex Custom Cut plus assembly fee (SFLEX-CC-ASSEMBLY)

Custom Cut Assembly Fee: Each custom cut assembly fee (SFLEX-CC-ASSEMBLY) includes UV cure adhesion of CONKIT and end cap plus light-up test

SĚNIK FLEX RGBW ACCESSORIES

ITEM NUMBER	DESCRIPTION
SFLEX-CONKIT-5PIN	3ft Power connection bare wire (for custom cut)
SFLEX-RGBW-END	End cap (for custom cut)
SFLEX-RGBW-CLIPS	Surface Mount Clips (Qty 10)
SFLEX-RGBW-CHAN-4	4ft Aluminum Channel w/lens
SFLEX-RGBW-CHAN-FEED	Aluminum Channel Feed Cap
SFLEX-RGBW-CHAN-END	Aluminum Channel End Cap
SFLEX-RGBW-CHAN-CLIP	Channel Mounting Clips (Qty 10)
SFLEX-SW-CHAN-CLIPADJ	Adjustable Mounting Channel Bracket
SFLEX-CHAN-180-CON	180° Inline Connectors for SFLEX Channel




SFLEX-CONKIT-5PIN



SFLEX-RGBW-END



SFLEX-RGBW-CHAN-CLIP



SFLEX-RGBW-CHAN-4



SFLEX-RGBW-CHAN-FEED



SFLEX-RGBW-CHAN-END



SFLEX-RGBW-CHAN-CLIP



SFLEX-SW-CHAN-CLIPADJ



SFLEX-CHAN-180

Building an RGBW Trulux™ System?

See pages (103–106) for RGB+TW DMX controller & receiver

DMX Color Changing Set-up



DMX Wall Control
4 Zone DMX Wall Control



Adaptive Series Power Supply
(30W | 60W | 96W | 192W | 288W)



DMX Decoder



SĚNIK FLEX RGBW