




Features

- Static white lateral (side bend) LED neon
- Available in 2700K, 3000K, and 4000K
- 90+ color rendering index
- Lumen output ranging from 91lm to 103lm per foot
- Cuttable every 1.97" (50mm) with 55.7ft (17m) max run
- UV, flame, and saltwater resistant
- IP67 rating featuring sealed silicone jacketing
- Dimmable (5-100%) with most ELV and TRIAC dimmers
- cULus Listed for indoor and outdoor wet locations
- 54,000 hours rated life

Available CCT



Dimming Options

- (5-100%) with most ELV and TRIAC dimmers

Listing / Ratings




NeonFlex Pro L Static White Side Bend Neon

Neonflex Pro is the next generation solution for achieving seamless lines of direct view lighting for any architectural-grade install. UV, flame, and saltwater resistant, Neonflex Pro is not only durable, but easy to install. Featuring multiple power feed options, in-field customization makes for a versatile option for any interior or exterior application.

Technical Information

Series	NFPROL
Input Voltage	24V DC
CCT Options	2700K / 3000K / 4000K
CRI	90+
Wattage	3.05W per ft
Lumens	Up to 103lm per ft
Max Run	55.7feet (17m)
Cuttable	Every 1.97" (50mm)
IP Rating	IP67 - Jacketed
Dimmable	(5-100%) ELV / TRIAC
Rating	cULus Listed, Wet locations, Indoor and Outdoor
Rated Life	54,000 hrs

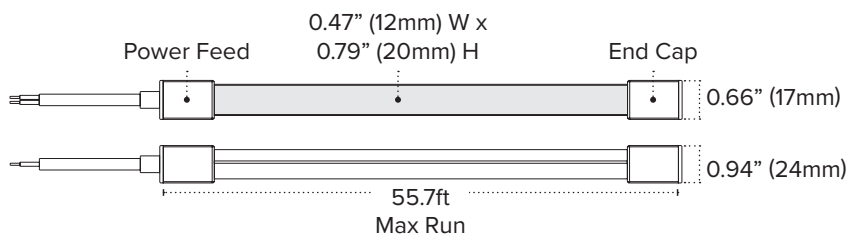



NEONFLEX PRO L STATIC WHITE SERIES ORDERING INFORMATION

ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING
NFPROL-27-98	24V DC	2700K	98 ft	91Lm / ft	3.05W / ft	IP67	90+	1.97" (50mm)
NFPROL-27-CC	24V DC	2700K	Custom Cut	91Lm / ft	3.05W / ft	IP67	90+	1.97" (50mm)
NFPROL-30-98	24V DC	3000K	98 ft	94Lm / ft	3.05W / ft	IP67	90+	1.97" (50mm)
NFPROL-30-CC	24V DC	3000K	Custom Cut	94Lm / ft	3.05W / ft	IP67	90+	1.97" (50mm)
NFPROL-40-98	24V DC	4000K	98 ft	103Lm / ft	3.05W / ft	IP67	90+	1.97" (50mm)
NFPROL-40-CC	24V DC	4000K	Custom Cut	103Lm / ft	3.05W / ft	IP67	90+	1.97" (50mm)

98ft Reels Include: Attached 3ft Lead Wire w/ Standard Front Left Feed Connector (NFPROV-CONKIT-5PIN-FRNTL)
 Custom Cuts: Order (1) Power Feed, and (1) NFPRO-CC-ASSEMBLY Assembly Fee per length of NFPRO

NEONFLEX PRO L STATIC WHITE SERIES ACCESSORIES

ITEM NUMBER	DESCRIPTION
NFPROL-CONKIT-2PIN-FRNTL	36" Pro L Power Feed - Front Left (2-pin) w/end cap
NFPROL-CONKIT-2PIN-FRNR	36" Pro L Power Feed - Front Right (2-pin) w/end cap
NFPROL-CONKIT-2PIN-BTTL	36" Pro L Power Feed - Bottom Left (2-pin) w/end cap
NFPROL-CONKIT-2PIN-BTTR	36" Pro L Power Feed - Bottom Right (2-pin) w/end cap
NFPROL-CONKIT-2PIN-SIDL	36" Pro L Power Feed - Side Left (2-pin) w/end cap
NFPROL-CONKIT-2PIN-SIDR	36" Pro L Power Feed - Side Right (2-pin) w/end cap
NFPROL-2JUMP6	6" Pro L Linking Cable - Front Feed (2-pin)
NFPROL-2JUMP12	12" Pro L Linking Cable - Front Feed (2-pin)
NFPROL-2JUMP24	24" Pro L Linking Cable - Front Feed (2-pin)
NFPROL-2JUMP36	36" Pro L Linking Cable - Front Feed (2-pin)
NFPROL-CHAN-1M	Pro L 1m Aluminum Mounting Channel

