



Features

- 2700K color temperature
- High color rendering (90+ CRI)
- Low voltage - 12V DC operation
- Available in three puck kits or single pucks
- Recessed or surface mount design
- Low profile design - less than 3/4" high
- Dimmable with most TRIAC and ELV dimmers
- Direct hardwire or plug-in installation
- 30,000 hours rated life

Available Finishes



White

Black

Control Options


- TRIAC (5-100%)
- ELV (5-100%)

Omni Puck

These low profile LED puck lights feature traditional low voltage power input for recessed or surface mount applications. Available in two finishes, they can be controlled with most TRIAC, CL or incandescent dimmers with ADPT or plug-in drivers within minimum and maximum load requirements.

Technical Information

Series	OMNI
Input Voltage	12V DC
CCT	2700K
CRI	90+
Wattage	3.2W per puck
Lumens	Up to 150Lm (see individual product)
Beam Angle	120°
Max Run	Dependent on driver, and dimming or non-dimming
Dimmable	15-100% (ELV, TRIAC); 5-100%
Mounting	Surface or recessed (2-1/4" Dia. cut-out)
Rating	Dry location
Rated Life	30,000 hrs

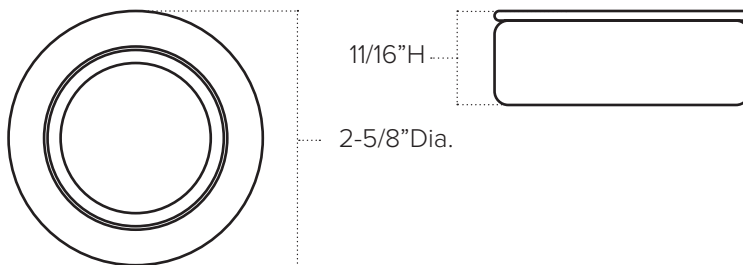

Omni Puck



Single Puck - White
3.2W / 150Lm
OMNI-1-WH



Single Puck - Black
3.2W / 140Lm
OMNI-1-BK

Omni Single Pucks Include: (1) Omni Puck with 72" lead wire / Mounting hardware




3 Puck Kit - White
3.2W per puck / 150Lm per puck
OMNI-3KIT-WH



3 Puck Kit - Black
3.2W per puck / 140Lm per puck
OMNI-3KIT-BK

Primary Side Dimming Set-up



Standard Dimmer

+



Adaptive Series Power Supply
(30W | 60W | 96W | 192W | 288W)

+



Omni Pucks