

## SmartView Duo



Featuring two large independent 8 inch LCD screens in a compact rack mount design, SmartView Duo handles SD, HD and 3Gb/s SDI video standards. SmartView Duo is perfect for post production, broadcast and live event monitoring. For easy setup, all screens can be remotely adjusted via ethernet connection. With SmartView Duo you can install SDI monitoring everywhere you need!

**\$545**

### Connections

#### SDI Video Input

Automatically switches between SD, HD and 3G-SDI. Reclocked loop through output.

#### Multi Rate Support

Auto detection of 2K, HD or standard definition inputs.

#### Updates and Configuration


Via USB 2.0 high speed (480 Mb/s)

#### Ethernet

10/100 BaseT with loop through.

#### Tally

9-pin D connector

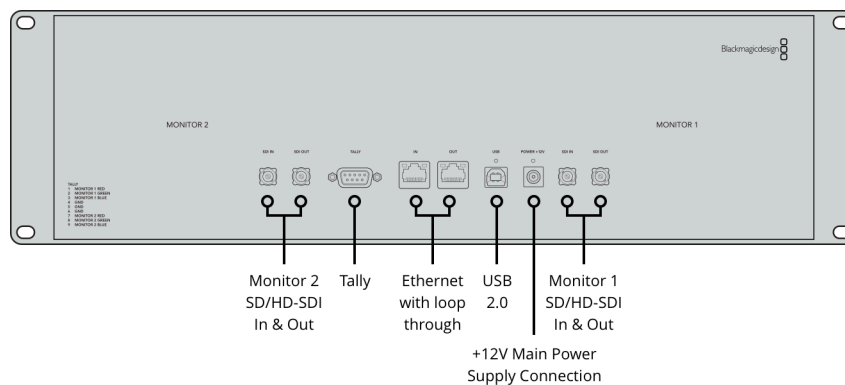

### Standards

#### SDI Compliance

SMPTE 259M, SMPTE 292M, SMPTE 296M, SMPTE 372M, SMPTE 424M Level B and SMPTE 425M.

#### SDI Color Space

REC 601, REC 709

#### SDI Auto Switching

Automatically selects between SD, HD and 3 Gb/s SDI.

#### Video Sampling

4:2:2 and 4:4:4

---

### SDI Format Support

525i59.94 NTSC, 625i50 PAL  
720p50, 720p59.94, 720p60  
1080p23.98, 1080p24, 1080p25,  
1080p29.97, 1080p30, 1080p50,  
1080p59.94, 1080p60  
1080PsF23.98, 1080PsF24,  
1080PsF25, 1080PsF29.97, 1080PsF30  
1080i50, 1080i59.94, 1080i60

### 2K Format Support

2K DCI 23.98p, 2K DCI 24p, 2K DCI  
25p  
2K DCI 23.98PsF, 2K DCI 24PsF, 2K  
DCI 25PsF

---

## Software

### Internal Software Upgrade

Via included firmware updater  
software.

### SmartView Utility Software

Via USB or Ethernet.

---

## Operating Systems



Mac 10.15 Catalina,  
Mac 11.1 Big Sur or later.



Windows 10, 64-bit.

---

## Display

### Display Element

TFT Active Matrix LCD.

### Response

< 15 ms

### Color Depth

16.7 Million Colors.

### Display Resolution

800 x 480 pixels

### Contrast Ratio

Typically 500:1

### Display Orientation

Displays can rotate upside down for  
optimum viewing angle.

---

## Power Requirements

### Power Supply

12V universal power supply included  
with international socket adapters for  
all countries.

### Power Consumption

< 20 Watts

### Operational Voltage Range

12V - 15V

---

## Physical Specifications



---

## Environmental Specifications

### Operating Temperature

0° to 40° C (32° to 104° F)

### Storage Temperature

-20° to 45° C (-4° to 113° F)

### Relative Humidity

0% to 90% non-condensing

---

## What's Included

SmartView Duo  
Power Supply  
Welcome wallet with QR code for software download

---

## Warranty

12 Months Limited Manufacturer's Warranty.

Blackmagic Design Authorized Reseller