

Features

- · Ready to install kit with plug & play connection
- Features handheld remote for easy on/off operation with built-in presets
- 3000K color temps with 96+ CRI
- Up to 150Lm per foot consuming 2.19W per foot
- Tape light is cuttable every 6.56in (167mm)
- Each tape light kit has a maximum run of 16.4 feet
- · Additional tape light accessories included for easy installation
- cULus Listed (dry location)

Available CCT



3000K

Control Options

• Single Color Controls (Included)

Listing / Ratings








TRULUX[™] STL Series Kit

Standard Grade tape light kits provide the components for a complete Trulux™ Lighting System. As the entry-level tape light grade in the Trulux™ line, Standard grade offers a modest amount of lumens while staying highly energy efficient. This convenient kit is ideal for accent lighting applications such as toe-kick lighting or above cabinet lighting.

Technical Information

Series	STL-5MKIT
Input Voltage	24V DC
CCT	3000K
CRI	96+
Wattage	Up to 2.19W per foot
Lumens	Up to 150Lm per foot
Max Run	16.4ft
Cuttable	Every 6.56in (167mm)
IP Rating	IP54 - Unjacketed
Dimmable	TRIAC ELV 5-100%
Rating	cULus Listed
Rated Life	50,000 hrs

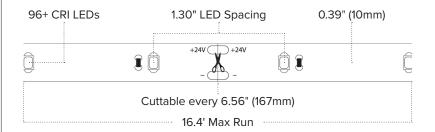



STL SERIES KIT ORDERING INFORMATION

ITEM NUMBER	VOLTAGE	ССТ	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING
STL-WW-5MKIT	24V DC	3000K	16.4ft	150Lm/ft	2.19W/ft	IP54	96+	6.56" (167mm)

STL Kits include: (1) 16.4ft (5M) Reel Standard Grade 2700K or 3000K Tape Light | (1) 24V 3A Plug-in Power Supply | (1) 15ft (22/2) Wire Spool | (1) In-line RF Receiver I (1) Handheld Remote I (6) HD Tape-to-Wire Connectors I (3) HD Tape-to-Tape Connectors

STL SERIES KIT ACCESSORIES				
ITEM NUMBER	DESCRIPTION			
TL-CONKIT	6' Trulink 4-in-1 Connection Kit			
TL-BLKS	Trulink 4-in-1 Connector Block (QTY 10)			
TL-2PWR-HD	6' HD Power Feed			
TL-2JUMP6-HD	6" HD Linking Cable			
TL-2JUMP24-HD	24" HD Linking Cable			
TL-2SPL-HD	HD Tape to Tape Splice Connector			
TL-2SPL-L-HD	90° "L" HD Tape to Tape Splice Connector			
WIRE-15-2PIN	15ft (20/2) Wire Spool			
WIRE-CMP-100-3PIN	100' (16/3) In-wall Rated Wire Spool			
INLINE-SC-CTRL	Simple Select In-line Controller (Single Color)			
SPKPL-REC-TB-5CH	Spektrum+™ Smart Receiver (App Controlled)			
LVSB-2PIN	2pin Low-Voltage Terminal Block			
RCWY-PVC-1M	1m Plastic Wire Cover Raceway			









TL-2JUMP24-HD



TL-2SPL-HD TL-2SPL-L-HD

WIRE-15-2PIN

WIRE-CMP-100-3PIN

INLINE-SC-CTRL

SPKPL-REC-TB-5CH





Building a Single Color Trulux™ System?

See pages (77–78) for compatible single color controllers & accessories

Trulux™ Kit Setup

