


Features

- Excellent color rendering (94-96+ CRI)
- Color temperatures from 2700K to 4000K
- 100-155 lumens per foot performance
- Consumes only 2.19 watts per foot
- Dimmable with most ELV dimmers
- Cuttable every 6.56"
- 32.8 ft max run
- (IP54) unjacketed or (IP65) jacketed versions
- 50,000 hours rated life
- Suitable for use in closets when used in an enclosed extrusion based on NFPA 70, NEC section 410.16 (A)(3) and 410.16 (C)(5)

Available CCT



Control Options

- Primary Side Dimming
- Single Color Controls
- Spektrum+™ Smart Receiver (App Controlled)
- Single Color In-line Controller

Listing / Ratings




TRULUX™ Standard Grade

Build an economical and versatile layered lighting system with Trulux™ Standard Grade tape light. Light output ranging from 100-155 lumens per foot, with easy to work with run lengths up to 32.8 feet, Trulux™ Standard Grade is perfect for accent lighting applications when soft and subtle lighting is desired.

Technical Information

Series	STL
Input Voltage	24V DC
CCT	2700K 3000K 4000K
CRI	94+ (IP65) 96+
Wattage	2.19W per foot
Lumens	Up to 155Lm per foot
Max Run	32.8 ft
Cuttable	Every 6.56in
IP Rating	IP54 - Unjacketed IP65 - Jacketed
Dimmable	TRIAC ELV 5-100%
Rating	cULus Listed
Rated Life	50,000 hrs

*Not compatible with Switchex All-in-one LED Driver + In-Wall Dimmer Switch

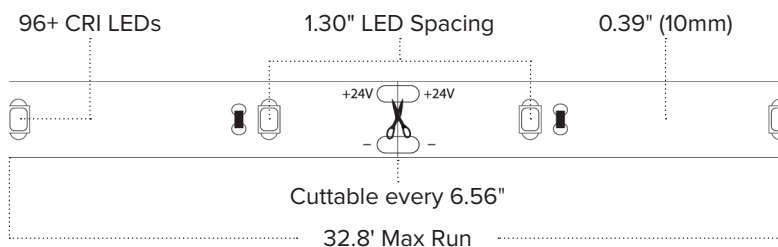



STL SERIES ORDERING INFORMATION

Custom Cut Lengths Available - Please Allow Up To 2-4 Weeks Order Processing & Delivery

ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING
STL-UWW	24V DC	2700K	16.4ft	146Lm/ft	2.19W/ft	IP54	96+	6.56" (167mm)
STL-UWW-33	24V DC	2700K	32.8ft	146Lm/ft	2.19W/ft	IP54	96+	6.56" (167mm)
STL65-UWW	24V DC	2700K	16.4ft	105Lm/ft	2.19W/ft	IP65	94+	6.56" (167mm)
STL-UWW-100	24V DC	2700K	100ft	146Lm/ft	2.19W/ft	IP54	96+	6.56" (167mm)
STL-WW	24V DC	3000K	16.4ft	150Lm/ft	2.19W/ft	IP54	96+	6.56" (167mm)
STL-WW-33	24V DC	3000K	32.8ft	150Lm/ft	2.19W/ft	IP54	96+	6.56" (167mm)
STL65-WW	24V DC	3000K	16.4ft	115Lm/ft	2.19W/ft	IP65	94+	6.56" (167mm)
STL-WW-100	24V DC	3000K	100ft	150Lm/ft	2.19W/ft	IP54	96+	6.56" (167mm)
STL-WH	24V DC	4000K	16.4ft	155Lm/ft	2.19W/ft	IP54	96+	6.56" (167mm)
STL-WH-33	24V DC	4000K	32.8ft	155Lm/ft	2.19W/ft	IP54	96+	6.56" (167mm)
STL65-WH	24V DC	4000K	16.4ft	125Lm/ft	2.19W/ft	IP65	94+	6.56" (167mm)
STL-WH-100	24V DC	4000K	100ft	155Lm/ft	2.19W/ft	IP54	96+	6.56" (167mm)


STL (IP54) 16.4ft Reels include: Attached 6' lead wires | (3) TL-BLKS | (3) TL-CONKITS | (3) TL-2PWR-HD
 STL (IP54) 32.8ft Reels include: Attached 6' Lead Wire | (3) HD Power Feeds
 STL65 (IP65) 16.4ft Reels include: (1) Attached 2' IP65 lead + 6" CONKIT | (1) Attached 2' IP65 tail + 6" CONKIT | (3) HD power feeds | (3) HD tape-to-tape connectors
 STL (IP54) 100ft Reels include: Attached 6' lead wires | (5) TL-BLKS | (5) TL-CONKITS | (5) TL-2PWR-HD
 Custom Cut: Order (1) CONKIT-CC Assembly Fee per length of tape; includes 6' soldered lead wire and shrink tube cover; for additional wire add (1) TL-WIRE per ft
 *Custom Cut Lengths must be calculated in 6.56" increments (Min 1ft / Max. 32.8ft).

STL SERIES ACCESSORIES

ITEM NUMBER	DESCRIPTION
TL-CONKIT	6' Trulink 4-in-1 Connection Kit
TL-BLKS	Trulink 4-in-1 Connector Block (QTY 10)
TL-2PWR-HD	6' HD Power Feed
TL-2PWR-HD-DC	6' HD Power Feed with DC Barrel
TL-2JUMP6-HD	6" HD Linking Cable
TL-2JUMP24-HD	24" HD Linking Cable
TL-2SPL-HD	HD Tape to Tape Splice Connector
TL-2SPL-L-HD	90° "L" HD Tape to Tape Splice Connector
TL-2JUMP65-.5	6" IP65 Linking Cable
TL-2JUMP65-1	12" IP65 Linking Cable
TL-2JUMP65-2	24" IP65 Linking Cable
WIRE-15-2PIN	15ft (20/2) Wire Spool
WIRE-CMP-100-3PIN	100' (16/3) In-wall Rated Wire Spool
INLINE-SC-CTRL	Simple Select In-line Controller (Single Color)
SPKPL-REC-TB-5CH	Spektrum+™ Smart Receiver (App Controlled)
LVS-2PIN	2pin Low-Voltage Terminal Block
RCWY-PVC-1M	1m Plastic Wire Cover Raceway



Primary Side Dimming Set-up



Standard Dimmer



Adaptive Series Power Supply
(30W | 60W | 96W | 192W | 288W)



Trulux™ Tape Light