



## Features

- RGBW lateral (side bend) LED neon
- Lumen output up to 97Lm per foot
- Consumes up to 4.57W per foot
- Cuttable every 2.46" (62.5mm) with 16.4ft (5m) max run
- Quick install field connections: Front, Side, and Bottom feeds
- UV, flame, and saltwater resistant
- IP67 rating featuring sealed silicone jacketing
- Dimmable (0-100%) with most DMX controls
- cULus Listed for indoor and outdoor wet locations
- 54,000 hours rated life

## Available CCT/Colors



RGBW

## Control Options

- (0-100%) with most DMX controls
- Spektrum+ Smart Receiver via app

## Listing / Ratings





## NeonFlex Pro L RGBW Side Bend Neon

Neonflex Pro is the next generation solution for achieving seamless lines of direct view lighting for any architectural-grade install. UV, flame, and saltwater resistant, Neonflex Pro is not only durable, but easy to install. Featuring multiple power feed options, in-field customization makes for a versatile option for any interior or exterior application.

## Technical Information

Series	NFPROL
Input Voltage	24V DC
Color Options	RGBW
Wattage	4.57W per ft
Lumens	Up to 97Lm per ft
Max Run	16.4feet (5m)
Cuttable	Every 2.46" (62.5mm)
IP Rating	IP67 - Jacketed
Dimmable	(0-100%) Via DMX Controls
Rating	cULus Listed, IP67, Wet Locations
Rated Life	54,000 hrs

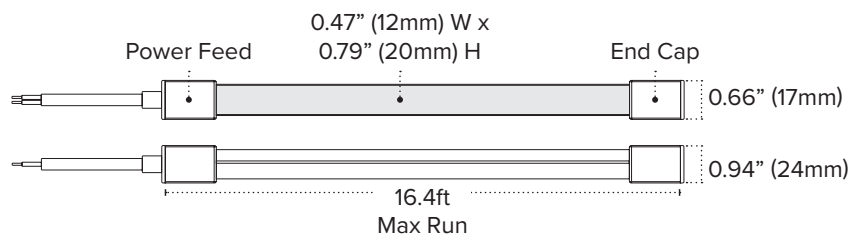

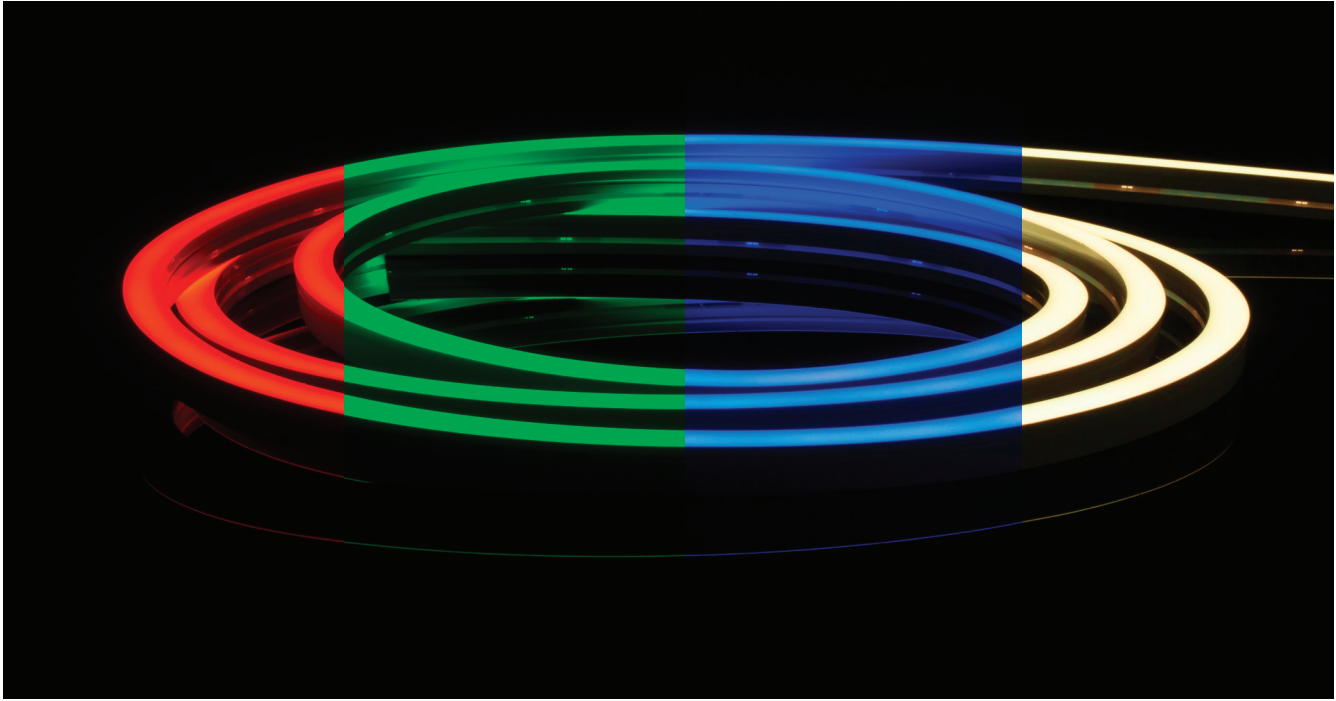

**NEONFLEX PRO L RGBW SERIES ORDERING INFORMATION**

ITEM NUMBER	VOLTAGE	COLOR	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CUTTING
NFPROL-RGBW-98	24V DC	RGBW (3000K)	98 ft	97Lm / ft	4.57W / ft	IP67	2.46" (62.5mm)
NFPROL-RGBW-CC	24V DC	RGBW (3000K)	Custom Cut	97Lm / ft	4.57W / ft	IP67	2.46" (62.5mm)

98ft Reels Include: Attached 3ft Lead Wire w/ Standard Front Left Feed Connector (NFPROL-CONKIT-5PIN-FRNTL)  
 Custom Cuts: Order (1) Power Feed, and (1) NFPRO-CC-ASSEMBLY Assembly Fee per length of NFPRO

**NEONFLEX PRO L RGBW SERIES ACCESSORIES**

ITEM NUMBER	DESCRIPTION
NFPROL-CONKIT-5PIN-FRNTL	36" Pro L Power Feed - Front Left (5-pin) w/end cap
NFPROL-CONKIT-5PIN-FRNR	36" Pro L Power Feed - Front Right (5-pin) w/end cap
NFPROL-CONKIT-5PIN-BTTL	36" Pro L Power Feed - Bottom Left (5-pin) w/end cap
NFPROL-CONKIT-5PIN-BTTR	36" Pro L Power Feed - Bottom Right (5-pin) w/end cap
NFPROL-CONKIT-5PIN-SIDL	36" Pro L Power Feed - Side Left (5-pin) w/end cap
NFPROL-CONKIT-5PIN-SIDR	36" Pro L Power Feed - Side Right (5-pin) w/end cap
NFPROL-5JUMP6	6" Pro L Linking Cable - Front Feed (5-pin)
NFPROL-5JUMP12	12" Pro L Linking Cable - Front Feed (5-pin)
NFPROL-5JUMP24	24" Pro L Linking Cable - Front Feed (5-pin)
NFPROL-5JUMP36	36" Pro L Linking Cable - Front Feed (5-pin)
NFPROL-CHAN-1M	Pro L 1m Aluminum Mounting Channel

