




## Features

- Static white vertical (top bend) LED neon
- Available in 2700K, 3000K, and 4000K
- 90+ color rendering index
- Lumen output ranging from 158Lm to 167Lm per foot
- Cuttable every 1.97" (50mm) with 55.7ft (17m) max run
- UV, flame, and saltwater resistant
- IP67 rating featuring sealed silicone jacketing
- Dimmable (5-100%) with most ELV and TRIAC dimmers
- cULus Listed for indoor and outdoor wet locations
- 54,000 hours rated life

## Available CCT



2700K 3000K 4000K

## Dimming Options

- (5-100%) with most ELV and TRIAC dimmers

## Listing / Ratings




## NeonFlex Pro V Static White Top Bend Neon

Neonflex Pro is the next generation solution for achieving seamless lines of direct view lighting for any architectural-grade install. UV, flame, and saltwater resistant, Neonflex Pro is not only durable, but easy to install. Featuring multiple power feed options, in-field customization makes for a versatile option for any interior or exterior application.

## Technical Information

Series	NFPROV
Input Voltage	24V DC
CCT Options	2700K / 3000K / 4000K
CRI	90+
Wattage	3.05W per ft
Lumens	Up to 167Lm per ft
Max Run	55.7 feet (17m)
Cuttable	Every 1.97" (50mm)
IP Rating	IP67 - Jacketed
Dimmable	ELV / TRIAC (5-100%)
Rating	cULus Listed, Wet locations, Indoor and Outdoor
Rated Life	54,000 hrs

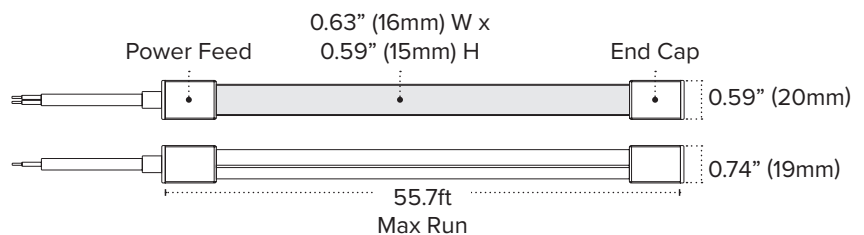



SPEKTRUM+

TRULUX

TASK LIGHTING

DOWNLIGHTING

12V AC

LINEAR LIGHTING

ARCHITECTURAL

POWER SUPPLIES

**NEONFLEX PRO V STATIC WHITE SERIES ORDERING INFORMATION**

ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CUTTING
NFPROV-27-98	24V DC	2700K	98 ft	161Lm / ft	3.05W / ft	IP67	1.97" (50mm)
NFPROV-27-CC	24V DC	2700K	Custom Cut	161Lm / ft	3.05W / ft	IP67	1.97" (50mm)
NFPROV-30-98	24V DC	3000K	98 ft	158Lm / ft	3.05W / ft	IP67	1.97" (50mm)
NFPROV-30-CC	24V DC	3000K	Custom Cut	158Lm / ft	3.05W / ft	IP67	1.97" (50mm)
NFPROV-40-98	24V DC	4000K	98 ft	167Lm / ft	3.05W / ft	IP67	1.97" (50mm)
NFPROV-40-CC	24V DC	4000K	Custom Cut	167Lm / ft	3.05W / ft	IP67	1.97" (50mm)

98ft Reels Include: Attached 3ft Lead Wire w/ Standard Front Left Feed Connector (NFPROV-CONKIT-2PIN-FRNTL)  
 Custom Cuts: Order (1) Power Feed, and (1) NFPRO-CC-ASSEMBLY Assembly Fee per length of NFPRO

**NEONFLEX PRO V STATIC WHITE SERIES ACCESSORIES**

ITEM NUMBER	DESCRIPTION
NFPROV-CONKIT-2PIN-FRNTL	36" Pro L Power Feed - Front Left (2-pin) w/end cap
NFPROV-CONKIT-2PIN-FRNTR	36" Pro L Power Feed - Front Right (2-pin) w/end cap
NFPROV-CONKIT-2PIN-BTTL	36" Pro L Power Feed - Bottom Left (2-pin) w/end cap
NFPROV-CONKIT-2PIN-BTTR	36" Pro L Power Feed - Bottom Right (2-pin) w/end cap
NFPROV-CONKIT-2PIN-SIDL	36" Pro L Power Feed - Side Left (2-pin) w/end cap
NFPROV-CONKIT-2PIN-SIDR	36" Pro L Power Feed - Side Right (2-pin) w/end cap
NFPROV-2JUMP6	6" Pro L Linking Cable - Front Feed (2-pin)
NFPROV-2JUMP12	12" Pro L Linking Cable - Front Feed (2-pin)
NFPROV-2JUMP24	24" Pro L Linking Cable - Front Feed (2-pin)
NFPROV-2JUMP36	36" Pro L Linking Cable - Front Feed (2-pin)
NFPROV-CHAN-1M	Pro L 1m Aluminum Mounting Channel

