



Features

- RGBW vertical (top bend) LED neon
- Lumen output up to 134Lm per foot
- Consumes up to 4.57W per foot
- Cuttable every 2.46" (62.5mm) with 16.4ft (5m) max run
- Quick install field connections: Front, Side, and Bottom feeds
- UV, flame, and saltwater resistant
- IP67 rating featuring sealed silicone jacketing
- Dimmable (0-100%) with most DMX controls
- cULus Listed for indoor and outdoor wet locations
- 54,000 hours rated life

Available CCT/Colors



3000K

RGBW

Control Options

- (0-100%) Via DMX Controls
- Spektrum+ Smart Receiver via app

Listing / Ratings





NeonFlex Pro V RGBW Top Bend Neon

Neonflex Pro is the next generation solution for achieving seamless lines of direct view lighting for any architectural-grade install. UV, flame, and saltwater resistant, Neonflex Pro is not only durable, but easy to install. Featuring multiple power feed options, in-field customization makes for a versatile option for any interior or exterior application.

Technical Information

Series	NFPROV
Input Voltage	24V DC
CCT	RGBW (3000K)
CRI	N/A
Wattage	4.57W per ft
Lumens	Up to 134Lm per ft
Max Run	16.4 feet (5m)
Cuttable	Every 2.46" (62.5mm)
IP Rating	IP67 - Jacketed
Dimmable	(0-100%) Via DMX Controls
Rating	cULus Listed, Wet locations, Indoor and Outdoor
Rated Life	54,000 hrs

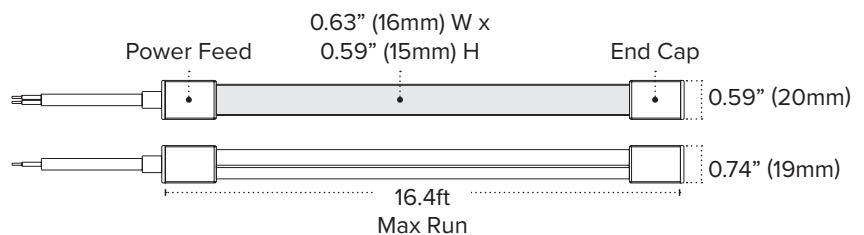

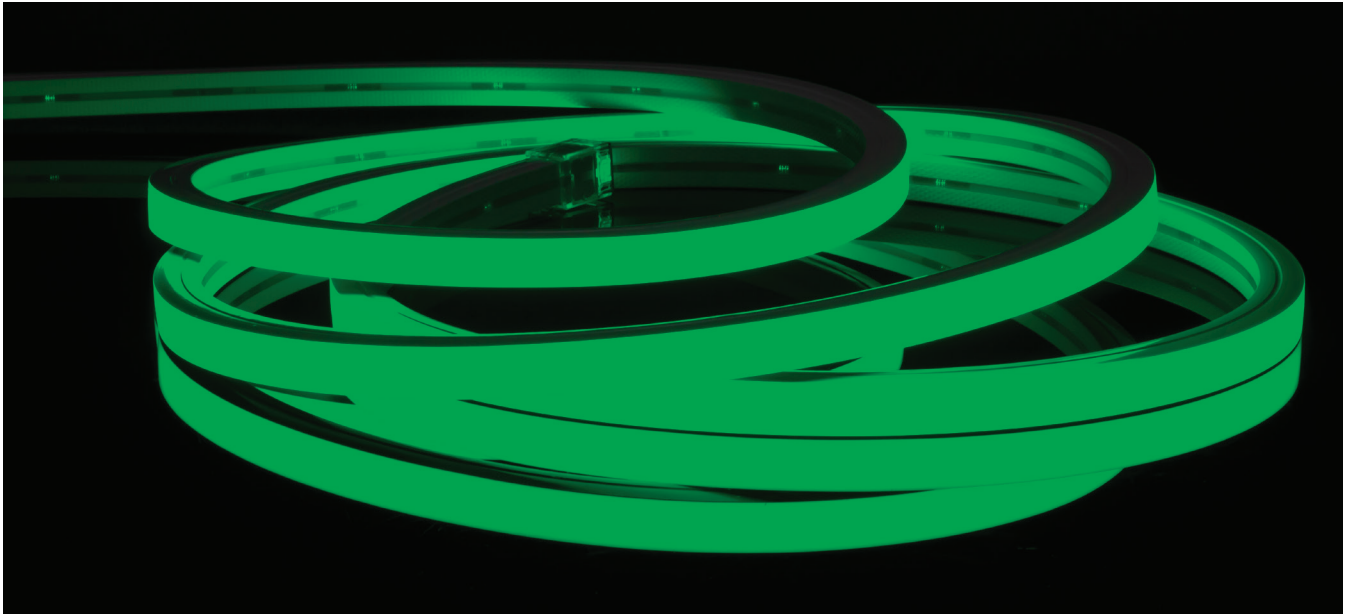

SPEKTRUM+

TRULUX

TASK LIGHTING

DOWNLIGHTING

12V AC

LINEAR LIGHTING

ARCHITECTURAL

POWER SUPPLIES

NEONFLEX PRO V RGBW SERIES ORDERING INFORMATION

ITEM NUMBER	VOLTAGE	COLOR	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CUTTING
NFPROV-RGBW-98	24V DC	RGBW (3000K)	98 ft	134Lm / ft	4.57W / ft	IP67	2.46" (62.5mm)
NFPROV-RGBW-CC	24V DC	RGBW (3000K)	Custom Cut	134Lm / ft	4.57W / ft	IP67	2.46" (62.5mm)

98ft Reels Include: Attached 3ft Lead Wire w/ Standard Front Left Feed Connector (NFPROV-CONKIT-5PIN-FRNTL)
 Custom Cuts: Order (1) Power Feed, and (1) NFPRO-CC-ASSEMBLY Assembly Fee per length of NFPRO

NEONFLEX PRO V RGBW SERIES ACCESSORIES

ITEM NUMBER	DESCRIPTION
NFPROV-CONKIT-5PIN-FRNTL	36" Pro V Power Feed - Front Left (5-pin) w/end cap
NFPROV-CONKIT-5PIN-FRNR	36" Pro V Power Feed - Front Right (5-pin) w/end cap
NFPROV-CONKIT-5PIN-BTTL	36" Pro V Power Feed - Bottom Left (5-pin) w/end cap
NFPROV-CONKIT-5PIN-BTTR	36" Pro V Power Feed - Bottom Right (5-pin) w/end cap
NFPROV-CONKIT-5PIN-SIDL	36" Pro V Power Feed - Side Left (5-pin) w/end cap
NFPROV-CONKIT-5PIN-SIDR	36" Pro V Power Feed - Side Right (5-pin) w/end cap
NFPROV-5JUMP6	6" Pro V Linking Cable - Front Feed (5-pin)
NFPROV-5JUMP12	12" Pro V Linking Cable - Front Feed (5-pin)
NFPROV-5JUMP24	24" Pro V Linking Cable - Front Feed (5-pin)
NFPROV-5JUMP36	36" Pro V Linking Cable - Front Feed (5-pin)
NFPROV-CHAN-1M	Pro V 1m Aluminum Mounting Channel

