




## Features

- Adhesive backing allows for easy, secure installation
- 20 modules per string
- Maximum linking up to 20 modules
- IP66 rated housing - suitable for wet locations
- cURus recognized
- 50,000 hours rated life

## Available CCT




3000K 6000K

## Static White Channel Rays

Channel Ray LED Modules are designed to be a versatile solution for sign and display lighting applications. With high quality optics, each module creates broad, uniform illumination without hotspots. 3M™ adhesive backing simplifies set up and take down for temporary applications like trade show displays.

## Technical Information

|               |                                                  |
|---------------|--------------------------------------------------|
| Series        | Channel Ray                                      |
| Input Voltage | 24V DC                                           |
| CCT           | 3000K   6000K                                    |
| Wattage       | Up to 1.08W/module (CR3)   1.2W/module (CR4)     |
| Lumens        | Up to 68Lm/module (CR3) Up to 220Lm/module (CR4) |
| Beam Angle    | 170°                                             |
| Max Run       | 20 modules                                       |
| Spacing       | 5" (130mm) / 5.9" (150mm)                        |
| IP Rating     | IP66                                             |
| Rating        | cURus recognized, Wet Location                   |
| Rated Life    | 50,000 hrs                                       |

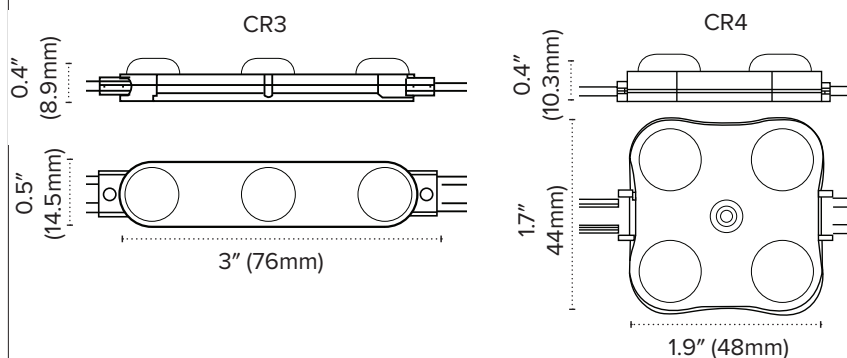



STATIC WHITE CHANNEL RAYS ORDERING INFORMATION


| ITEM NUMBER       | VOLTAGE | CCT/Color | LENGTH | LUMENS / FT  | WATTAGE / FT | IP RATING | CRI | SPACING      |
|-------------------|---------|-----------|--------|--------------|--------------|-----------|-----|--------------|
| CR3-24VDC-30-5-20 | 24V DC  | 3000K     | 170"   | 68Lm/module  | 1.08W/module | IP66      | ≥70 | 5" (130mm)   |
| CR3-24VDC-60-5-20 | 24V DC  | 6000K     | 170"   | 68Lm/module  | 1.08W/module | IP66      | ≥70 | 5" (130mm)   |
| CR4-24VDC-30-5-20 | 24V DC  | 3000K     | 167.8" | 220Lm/module | 1.2W/module  | IP66      | ≥70 | 5.9" (150mm) |
| CR4-24VDC-60-5-20 | 24V DC  | 6000K     | 167.8" | 220Lm/module | 1.2W/module  | IP66      | ≥70 | 5.9" (150mm) |

STATIC WHITE CHANNEL RAYS ACCESSORIES

| ITEM NUMBER       | DESCRIPTION                                     |
|-------------------|-------------------------------------------------|
| WIRE-CMP-100-3PIN | 100' (16/3) In-wall Rated Wire Spool            |
| INLINE-SC-CTRL    | Simple Select In-line Controller (Single Color) |
| SPKPL-REC-TB-5CH  | Spektrum+™ Smart Receiver (App Controlled)      |
| LVSB-2PIN         | 2pin Low-Voltage Terminal Block                 |
| RCWY-PVC-1M       | 1m Plastic Wire Cover Raceway                   |



WIRE-CMP-100-3PIN



INLINE-SC-CTRL



SPKPL-REC-TB-5CH



LVSB-2PIN



RCWY-PVC-1M

Quick Set-up



Adaptive Series Power Supply  
(30W | 60W | 96W | 192W | 288W)



Static White Channel Rays