



Features

- Single color vertical (top bend) LED neon
- Available in Red, Green, or Blue
- Lumen output ranging from 30Lm to 149Lm per foot
- Cuttable every 1.97" (50mm) with 55.7ft (17m) max run
- UV, flame, and saltwater resistant
- IP67 rating featuring sealed silicone jacketing
- Dimmable (5-100%) with most ELV and TRIAC dimmers
- cULus Listed for indoor and outdoor wet locations
- 54,000 hours rated life

Available Colors



Red Green Blue

Dimming Options

- (5-100%) with most ELV and TRIAC dimmers

Listing / Ratings





NeonFlex Pro V Single Color Top Bend Neon

Neonflex Pro is the next generation solution for achieving seamless lines of direct view lighting for any architectural-grade install. UV, flame, and saltwater resistant, Neonflex Pro is not only durable, but easy to install. Featuring multiple power feed options, in-field customization makes for a versatile option for any interior or exterior application.

Technical Information

Series	NFPROV
Input Voltage	24V DC
Color Options	Red / Green / Blue
CRI	N/A
Wattage	3.05W per ft
Lumens	Up to 149Lm per ft
Max Run	55.7 feet (17m)
Cuttable	Every 1.97" (50mm)
IP Rating	IP67 - Jacketed
Dimmable	ELV / TRIAC (5-100%)
Rating	cULus Listed, Wet locations, Indoor and Outdoor
Rated Life	54,000 hrs

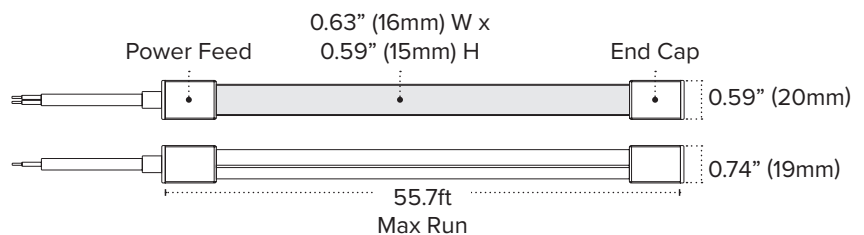

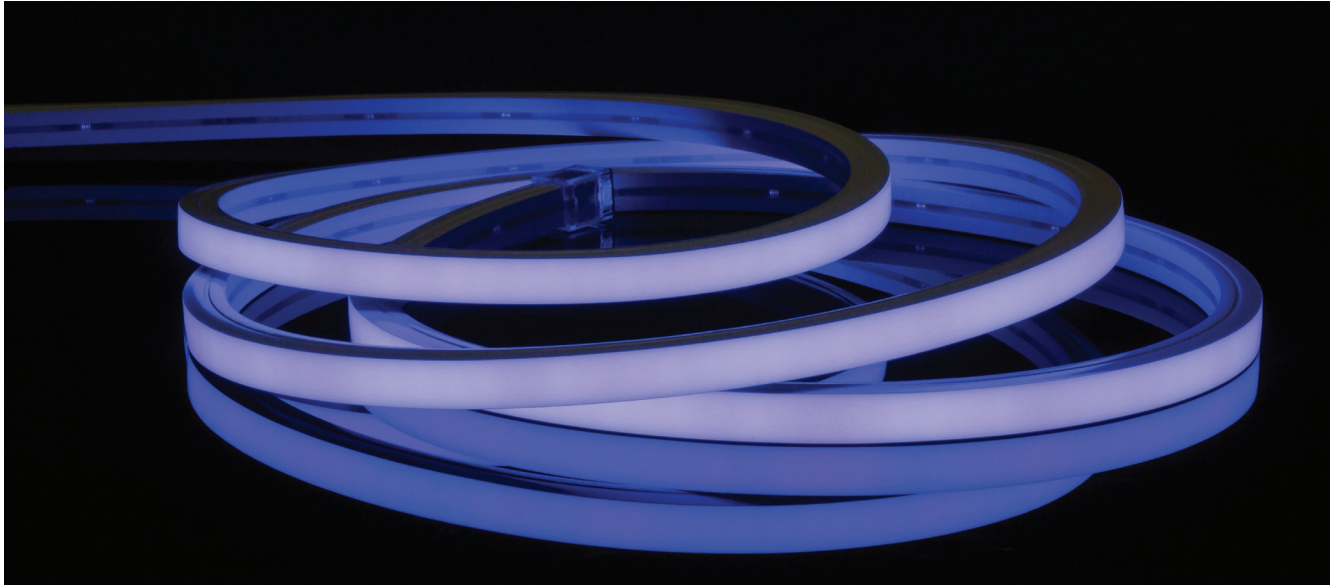

NEONFLEX PRO V SINGLE COLOR SERIES ORDERING INFORMATION

ITEM NUMBER	VOLTAGE	COLOR	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CUTTING
NFPROV-RE-98	24V DC	Red	98 ft	60Lm / ft	3.05W / ft	IP67	1.97" (50mm)
NFPROV-RE-CC	24V DC	Red	Custom Cut	60Lm / ft	3.05W / ft	IP67	1.97" (50mm)
NFPROV-GR-98	24V DC	Green	98 ft	149Lm / ft	3.05W / ft	IP67	1.97" (50mm)
NFPROV-GR-CC	24V DC	Green	Custom Cut	149Lm / ft	3.05W / ft	IP67	1.97" (50mm)
NFPROV-BL-98	24V DC	Blue	98 ft	30Lm / ft	3.05W / ft	IP67	1.97" (50mm)
NFPROV-BL-CC	24V DC	Blue	Custom Cut	30Lm / ft	3.05W / ft	IP67	1.97" (50mm)

98ft Reels Include: Attached 3ft Lead Wire w/ Standard Front Left Feed Connector (NFPROV-CONKIT-2PIN-FRNTL)
 Custom Cuts: Order (1) Power Feed, and (1) NFPROV-CC-ASSEMBLY Assembly Fee per length of NFPRO

NEONFLEX PRO V SINGLE COLOR SERIES ACCESSORIES

ITEM NUMBER	DESCRIPTION
NFPROV-CONKIT-2PIN-FRNTL	36" Pro V Power Feed - Front Left (2-pin) w/end cap
NFPROV-CONKIT-2PIN-FRNR	36" Pro V Power Feed - Front Right (2-pin) w/end cap
NFPROV-CONKIT-2PIN-BTTL	36" Pro V Power Feed - Bottom Left (2-pin) w/end cap
NFPROV-CONKIT-2PIN-BTTR	36" Pro V Power Feed - Bottom Right (2-pin) w/end cap
NFPROV-CONKIT-2PIN-SIDL	36" Pro V Power Feed - Side Left (2-pin) w/end cap
NFPROV-CONKIT-2PIN-SIDR	36" Pro V Power Feed - Side Right (2-pin) w/end cap
NFPROV-2JUMP6	6" Pro V Linking Cable - Front Feed (2-pin)
NFPROV-2JUMP12	12" Pro V Linking Cable - Front Feed (2-pin)
NFPROV-2JUMP24	24" Pro V Linking Cable - Front Feed (2-pin)
NFPROV-2JUMP36	36" Pro V Linking Cable - Front Feed (2-pin)
NFPROV-END	Pro V End Cap
NFPROV-CHAN-1M	Pro V 1m Aluminum Mounting Channel

