



Features

- 120V DC reels consume only 3 watts per foot
- Cuttable[†] every 12"
- Economical for larger installations - no need for a driver (164ft max run)
- cETLus Listed[†] for outdoor, wet locations
- Suitable for indoor and outdoor use
- Requires RGBW control (120-CTRL-4CH recommended, sold separately)
- 30,000 hours rated life

Available CCT/Colors



RGBW

Dimming Options

- (0-100%) with most DMX controls

Listing / Ratings[‡]



Hybrid 3 RGBW

Superb light output for indoor and outdoor use. Parallel wiring in 12" cutting increments ensures that if one LED goes out, the rest of the LEDs continue to operate. Now available in color changing. Hybrid 3 RGBW adds another element to your hospitality, home theater, and other various entertainment applications.


Technical Information



Series	120-H3
Input Voltage	120V DC
CCT	RGBW
Wattage	3W per ft
Lumens	Up to 105Lm per ft
Max Run	164 feet (50m) (not recommended to exceed 75 feet in any single run)
Cuttable	Every 12" (305mm) [†]
IP Rating	IP65**
Dimmable	0-100% Via DMX Controls
Rating	cETLus Listed [†] , Wet locations
Rated Life	30,000 hrs

**IP65 rated only when used with pre-attached molded power cord and end cap is either pre-attached or properly sealed with dielectric grease, silicone and shrink tube

[†]ETL Listing is void if product is cut

[‡]Do not install in inclement weather or extreme temperature conditions (i.e. -25°C (-13°F) and below)

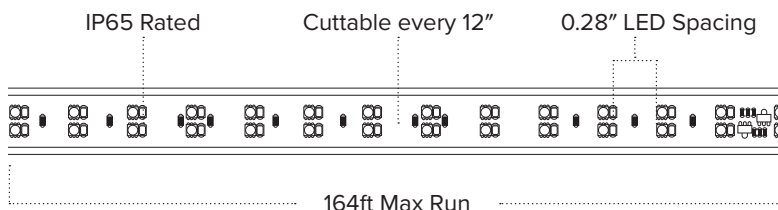

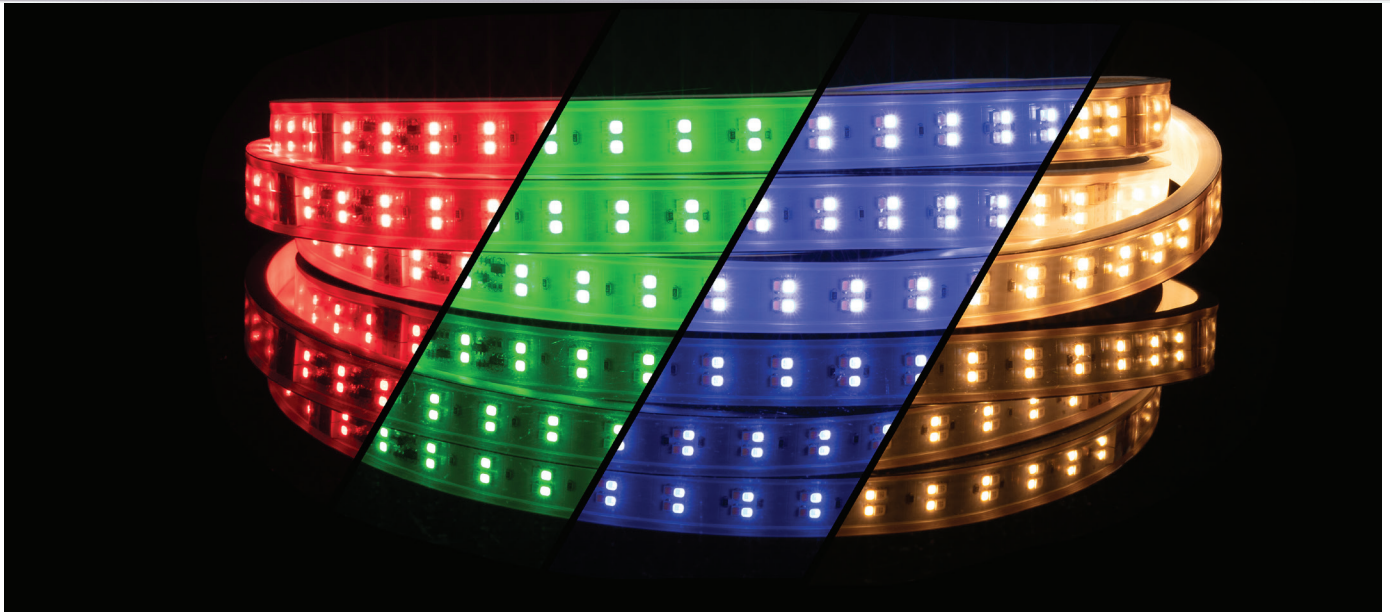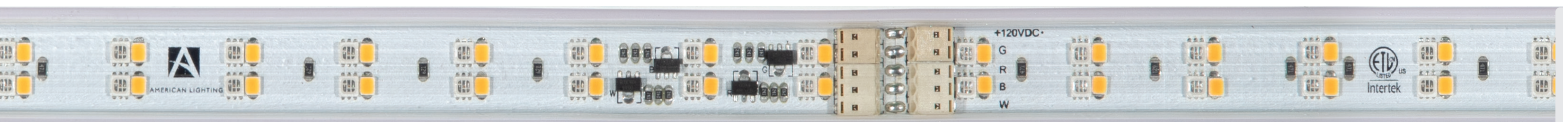


HYBRID 3 RGBW ORDERING INFORMATION

ITEM NUMBER	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CUTTING
120-H3-RGBW	RGB + 3000K	150 ft	105Lm / ft	3W / ft	IP65	12" (305mm)

Hybrid 3 RGBW Includes: (1) 5ft Attached Power Cord to IP65 connection (w/bare wire konkit), (4) 120-H3-RGBW-KONKIT) , (50) Clear plastic mounting clips with screws

HYBRID 3 RGBW ACCESSORIES

ITEM NUMBER	DESCRIPTION
120-CTRL-4CH	120V AC/DC 4 Channel Controller w/Junction Box
120-H3-RGBW-KONKIT	Block Style End cap with 5ft cable
120-H3-RGBW-JUMP.5	6" linking cable
120-H3-RGBW-JUMP3	3' linking cable
120-H3-RGBW-JUMP6	6' linking cable
120-H3-RGBW-END	End cap
120-H3-RGBW-CLIPS	Mounting clips (QTY 10)
120-H3-RGBW-CHAN-4	4FT Black Aluminum Mounting Channel; Includes Lens
120-H3-RGBW-CHAN-END	Black Plastic End Cap for Aluminum Mounting Channel
120-H3-RGBW-CHAN-FEED	Black Plastic End Cap w/Feed for Aluminum Mounting Channel
REC-DMX-RF	Radio Frequency Receiver (Use w/120-CTRL-4CH + RF Control)
DEC-DMX-JUMP15FT	15' Signal Linking Cable (Use w/120-CTRL-4CH)
RF-RGBW-3AAA	RGBW Handheld 3AAA Remote Control (Use with REC-DMX-RF)



120-CTRL-4CH




120-H3-RGBW-KONKIT



120-H3-RGBW-JUMP.5
120-H3-RGBW-JUMP3
120-H3-RGBW-JUMP6



120-H3-RGBW-END



120-H3-RGBW-CLIPS



120-H3-RGBW-CHAN-4



120-H3-RGBW-CHAN-END



120-H3-RGBW-CHAN-FEED



REC-DMX-RF



DEC-DMX-JUMP15FT



RF-RGBW-3AAA