



Features

- High Output White with 94+ CRI offers up to 335 lumens per foot using only 4.6W per foot
- Warm White yields 270 lumens per foot
- Dimmable with most electronic low voltage dimmers
- Field cuttable (once per reel) every 3.94" (100mm)
- Sealed IP68 power input can be used with 10ft and 20ft jumpers for wet and submerged tape locations
- Max run of 16.4 feet
- 50,000 hours rated life

Available CCT



3000K 4000K

Control Options

- Primary Side Dimming
- DMX Controls
 - Requires Adaptive Driver + Receiver
- Single color In-line Controller
- Spektrum+™ Smart Receiver (App Controlled)

Listing / Ratings




TRULUX™ High Output IP68 Outdoor


For water features or wet location applications, Trulux™ High Output IP68 tape is a highly sought after solution. With an IP68 outdoor submersible rating, our submersible tape can withstand most natural elements and can be field cut for custom applications making for a great go to for small ponds and fountain lighting solutions.

Technical Information

Series	HTL68
Input Voltage	24V DC
CCT	3000K 4000K
CRI	94+
Wattage	Up to 4.6W per foot
Lumens	Up to 335Lm per foot
Max Run	16.4ft
Cutttable	**Every 3.94in (100mm)
IP Rating	IP68 (silicone encased)
Dimmable	TRIAC ELV 5-100%
Rating	cULus Listed
Rated Life	50,000 hrs

**Field cuttable (once per reel) - must be sealed with IP68 end caps and silicone

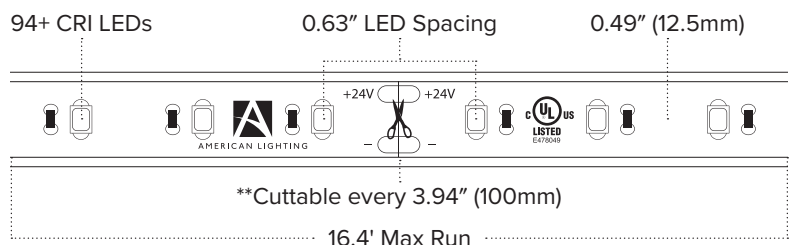



SPEKTRUM+
TRULUX
TASK LIGHTING
DOWNLIGHTING
12V AC
LINEAR LIGHTING
ARCHITECTURAL
POWER SUPPLIES

HTL68 SUBMERSIBLE SERIES ORDERING INFORMATION

ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING
HTL68-WW	24V DC	3000K	16.4ft	270Lm/ft	4.6W/ft	IP68	94+	3.94" (100mm)
HTL68-WH	24V DC	4000K	16.4ft	335Lm/ft	4.6W/ft	IP68	94+	3.94" (100mm)

HTL68-WW/WH (IP68) 16.4ft Reels include: Attached IP68 Power Feed | (15) Mounting Clips | (2) IP68 End Caps

HTL68 SUBMERSIBLE ACCESSORIES


ITEM NUMBER	DESCRIPTION
TL-2JUMP68-10	10' Extension Cable (IP68)
TL-2JUMP68-20	20' Extension Cable (IP68)
WIRE-CMP-100-3PIN	100' (16/3) In-wall Rated Wire Spool
TL-CLIPS-15	IP68 Mounting Clips (QTY of 15)
TL-LCLIPS-15	IP68 "L" Clips (QTY of 15)
SPKPL-REC-TB-5CH	Spektrum+™ Smart Receiver (App Controlled)




TL-2JUMP68-10
TL-2JUMP68-20



WIRE-CMP-100-3PIN



TL-CLIPS-15



TL-LCLIPS-15




SPKPL-REC-TB-5CH

Building a Single Color Trulux™ System?

See pages (77-78) for compatible single color controllers & accessories

Primary Side Dimming Set-up



Standard Dimmer



Adaptive Series Power Supply
(30W | 60W | 96W | 192W | 288W)



Trulux™ Tape Light

Smart Receiver Set-up



Smart Device

and / or



Smart Switch Control



Adaptive Series Power Supply
(30W | 60W | 96W | 192W | 288W)



Smart Receiver



24V Tape Light