Blackmagicdesign

Fairlight Console LCD Monitor

Add a high resolution LCD monitor to every bay of your Fairlight console with Fairlight Console LCD Monitor! When installed above channel faders and controls you get instant graphic feedback for that channel, access to additional controls and more. Featuring an ethernet interface to display channel information, there is also an HDMI interface you can connect to your computer to see native plug-in interfaces and an SDI BNC for video program or studio camera previews.

$1,295

Connections

Ethernet
Ethernet supports 10/100/1000 BaseT.

HDMI Video Input
HDMI Type A.

SDI Inputs
1 x 3G-SDI.

SDI Rates
1.5G, 3G.

Standards

HDMI Video Standards
1080p23.98, 1080p24, 1080p25, 1080p29.97, 1080p30, 1080p50, 1080p59.94, 1080p60

SDI Video Standards
1080p23.98, 1080p24, 1080p25, 1080p29.97, 1080p30, 1080p50, 1080p59.94, 1080p60, 1080i50, 1080i59.94, 1080i60

SDI Compliance
SMPTE 259M, SMPTE 292M, SMPTE 296M, SMPTE 424M-B, SMPTE 425 Level A and Level B.

SDI Video Sampling
4:2:2

SDI Color Precision
10-bit

SDI Color Space
YUV

Updates and Configuration

1 x USB Type-C for software configuration and software updates.

Software

Internal software upgrade via updater application.

Operating Systems

Mac 10.15 Catalina or later.

Windows 10, 64-bit.

Settings Control

Fairlight Studio and Console setup utility software when connected by USB.
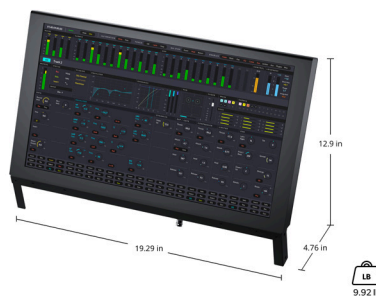
Power Requirements

Power Supply
Internal 100 - 240V AC 50/60Hz with
IEC C14 mains input.

Power Usage
20W max.

Physical Specifications

12.9 in

19.29 in

4.76 in

LB
9.92 lb

Environmental Specifications

Operating Temperature
0° to 40°C (32° to 104°F)

Storage Temperature
-20° to 60°C (-4° to 140°F)

Relative Humidity
0% to 90% non-condensing

What's Included

Fairlight Console LCD Monitor

Warranty

1 Year Limited Manufacturer's Warranty.

Blackmagic Design Authorized Reseller