



## Features

- Single Color lateral (side bend) LED neon
- Available in Red, Green, or Blue
- Lumen output ranging from 21Lm to 106Lm per foot
- Cuttable every 1.97" (50mm) with 55.7ft (17m) max run
- UV, flame, and saltwater resistant
- IP67 rating featuring sealed silicone jacketing
- Dimmable (5-100%) with most ELV and TRIAC dimmers
- cULus Listed for indoor and outdoor wet locations
- 54,000 hours rated life

## Available Colors



Red Green Blue

## Dimming Options

- (5-100%) with most ELV and TRIAC dimmers

## Listing / Ratings





## NeonFlex Pro L Single Color Side Bend Neon

Neonflex Pro is the next generation solution for achieving seamless lines of direct view lighting for any architectural-grade install. UV, flame, and saltwater resistant, Neonflex Pro is not only durable, but easy to install. Featuring multiple power feed options, in-field customization makes for a versatile option for any interior or exterior application.

## Technical Information

Series	NFPROL
Input Voltage	24V DC
Color Options	Red / Green / Blue
CRI	N/A
Wattage	3.05W per ft
Lumens	Up to 106Lm per ft
Max Run	55.7 feet (17m)
Cuttable	Every 1.97" (50mm)
IP Rating	IP67 - Jacketed
Dimmable	ELV / TRIAC (5-100%)
Rating	cULus Listed, Wet locations, Indoor and Outdoor
Rated Life	54,000 hrs

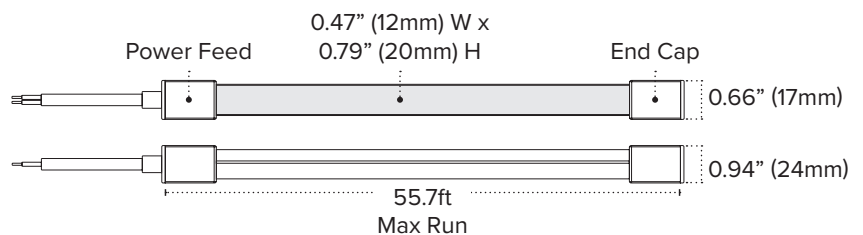

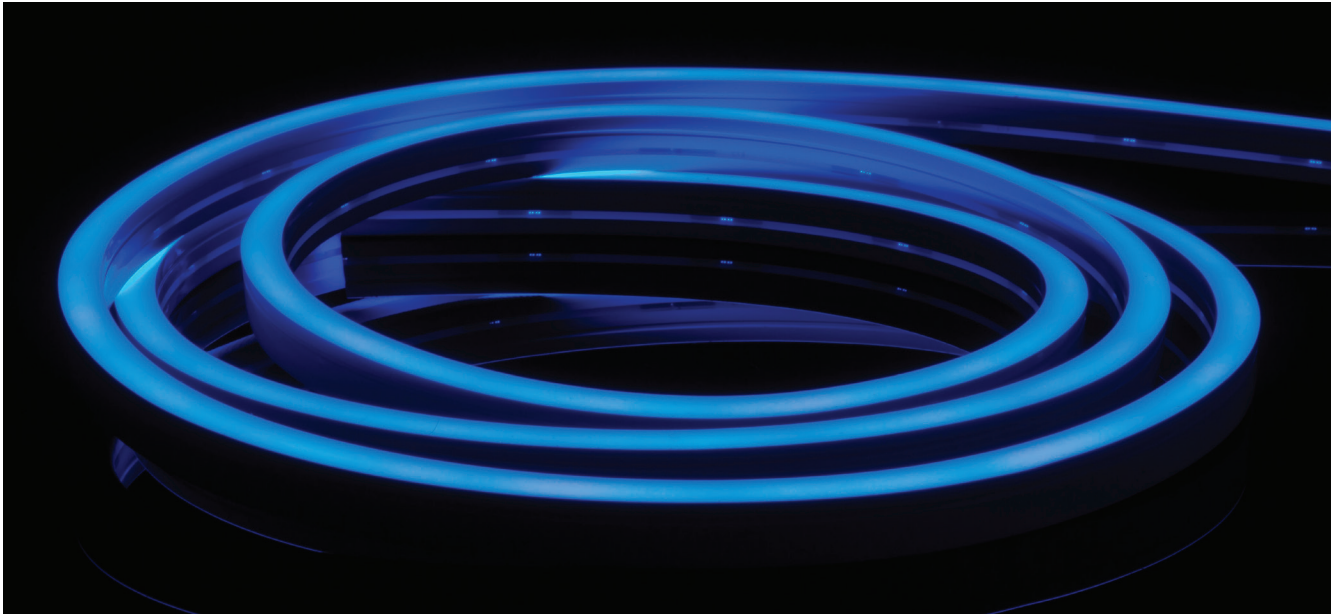

**NEONFLEX PRO L SINGLE COLOR SERIES ORDERING INFORMATION**

ITEM NUMBER	VOLTAGE	COLOR	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CUTTING
NFPROL-RE-98	24V DC	Red	98 ft	41Lm / ft	3.05W / ft	IP67	1.97" (50mm)
NFPROL-RE-CC	24V DC	Red	Custom Cut	41Lm / ft	3.05W / ft	IP67	1.97" (50mm)
NFPROL-GR-98	24V DC	Green	98 ft	106Lm / ft	3.05W / ft	IP67	1.97" (50mm)
NFPROL-GR-CC	24V DC	Green	Custom Cut	106Lm / ft	3.05W / ft	IP67	1.97" (50mm)
NFPROL-BL-98	24V DC	Blue	98 ft	21Lm / ft	3.05W / ft	IP67	1.97" (50mm)
NFPROL-BL-CC	24V DC	Blue	Custom Cut	21Lm / ft	3.05W / ft	IP67	1.97" (50mm)

98ft Reels Include: Attached 3ft Lead Wire w/ Standard Front Left Feed Connector (NFPROL-CONKIT-2PIN-FRNTL)  
 Custom Cuts: Order (1) Power Feed, and (1) NFPRO-CC-ASSEMBLY Assembly Fee per length of NFPRO

**NEONFLEX PRO L SINGLE COLOR SERIES ACCESSORIES**

ITEM NUMBER	DESCRIPTION
NFPROL-CONKIT-2PIN-FRNTL	36" Pro L Power Feed - Front Left (2-pin) w/end cap
NFPROL-CONKIT-2PIN-FRNR	36" Pro L Power Feed - Front Right (2-pin) w/end cap
NFPROL-CONKIT-2PIN-BTTL	36" Pro L Power Feed - Bottom Left (2-pin) w/end cap
NFPROL-CONKIT-2PIN-BTTR	36" Pro L Power Feed - Bottom Right (2-pin) w/end cap
NFPROL-CONKIT-2PIN-SIDL	36" Pro L Power Feed - Side Left (2-pin) w/end cap
NFPROL-CONKIT-2PIN-SIDR	36" Pro L Power Feed - Side Right (2-pin) w/end cap
NFPROL-2JUMP6	6" Pro L Linking Cable - Front Feed (2-pin)
NFPROL-2JUMP12	12" Pro L Linking Cable - Front Feed (2-pin)
NFPROL-2JUMP24	24" Pro L Linking Cable - Front Feed (2-pin)
NFPROL-2JUMP36	36" Pro L Linking Cable - Front Feed (2-pin)
NFPROL-CHAN-1M	Pro L 1m Aluminum Mounting Channel

