


Teranex Mini SDI to Audio 12G



De-embed audio from any SD, HD or Ultra HD SDI video connection and output 2 channels of analog audio to balanced XLR, optical or HiFi RCA, or output up to 4 channels of AES/EBU digital audio. Perfect for converting and outputting SDI audio to a massive range of audio equipment such as audio mixers, iPods, analog broadcast decks, audio monitors and more.

\$545

Connections

SDI Video Inputs

1 x 12G-SDI SD/HD/2K/4K auto switching.

SDI Video Outputs

1 x 12G-SDI loop output.

Analog Audio Outputs

2 channels professional balanced analog audio via XLR connectors, or 2 channel unbalanced analog line level via RCA connectors. Right XLR can be configured for timecode output.

Digital Audio Outputs

4 channels professional 110Ω balanced digital audio via XLR connectors. Right XLR can be configured for timecode output.

Embedded Audio Support

16 channels.

Optical Audio Output

S/PDIF Signal with TOSLINK Connector.

Multi Rate Support


Automatic switching between SD/HD/2K and 4K.

Updates and Configuration

USB or Ethernet.

Reclocking

Yes

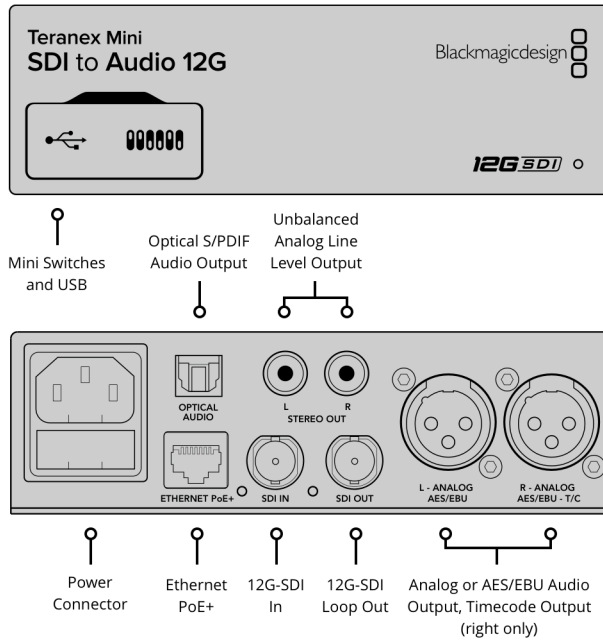

Standards

SD Video Standards

525i59.94 NTSC, 625i50 PAL

HD Video Standards

720p50, 720p59.94, 720p60
 1080i50, 1080i59.94, 1080i60
 1080p23.98, 1080p24, 1080p25,
 1080p29.97, 1080p30, 1080p50,
 1080p59.94, 1080p60
 1080PsF23.98, 1080PsF24,
 1080PsF25, 1080PsF29.97, 1080PsF30

2K Video Standards

2Kp23.98 DCI, 2Kp24 DCI, 2Kp25 DCI
 2KPsF23.98 DCI, 2KPsF24 DCI,
 2KPsF25 DCI

Ultra HD Video Standards

2160p23.98, 2160p24, 2160p25,
 2160p29.97, 2160p30, 2160p50,
 2160p59.94, 2160p60

4K Video Standards

4Kp23.98 DCI, 4Kp24 DCI, 4Kp25 DCI

SDI Compliance

SMPTE 259M, SMPTE 292M,
 SMPTE 296M, SMPTE 372M,
 SMPTE 424M, SMPTE 425M
 level A and B, SMPTE 2081-1,
 SMPTE 2081-10, SMPTE 2082-1 and
 SMPTE 2082-10

SDI Video Rates

SDI video connections are auto switching between standard definition SDI, high definition level A and level B 3G-SDI, 6G-SDI, and 12G-SDI.

SDI Video Sampling

4:2:2 and 4:4:4.

SDI Audio Sampling

Television standard sample rate of 48 kHz and 24-bit.

SDI Color Precision

YUV 4:2:2 and RGB 4:4:4 in HD, 2K and 4K.

SDI Color Space

REC 601, REC 709

Software

Software Control

Mac™ and Windows™ software upgrade via USB and Ethernet.

Internal Software Upgrade

Via included updater application.

Operating Systems



Mac 10.15 Catalina,
Mac 11.1 Big Sur or later.



Windows 10, 64-bit.

Settings Control

Basic Settings Control

Mini Switches, USB and Ethernet via
free software utility

Optional Front Panel Control

Front mounted Smart Panel with LCD,
rotary knob and six settings buttons

Power Requirements

Power Supply

1 x built-in international AC power
supply with IEC C14 inlet. IEC Power
cable required. 100 - 240V AC Input.

Power Over Ethernet

Can be powered via 48V DC using
PoE+ (power over ethernet).

Power Consumption

16 Watts

Operational Voltage Range

100 - 240V AC

Physical Specifications



Environmental Specifications

Operating Temperature

0° to 40°C (32° to 104°F)

Storage Temperature

-20° to 60°C (-4° to 140°F)

Relative Humidity

0% to 90% non-condensing

What's Included

Teranex Mini SDI to Audio 12G

Welcome wallet with QR code for software download

Warranty

3 year Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2023, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller