



## Features

- Low-profile, flexible light strip emits light from 3 sides producing a 160° beam angle
- UV, flame, and saltwater resistant (IP65) PU coating
- Long life LEDs produce high lumen output
- Durable housing with 4.7" bending radius
- Cuttable every 3.94"
- Simple connections make install quick and easy
- Compatible with Trulux™ controls
- Suitable for coves, frame, bars, rails, and other areas where a small profile or outline of light is needed
- cETLus Listed for wet locations (IP65 rating void if product is cut)

## Available CCT



3000K 4000K

## Control Options

- Standard TRIAC/ELV/CL Dimmer

## Listing / Ratings




## MicroLux - Static White

Low-profile, flexible diffuse tape with flexible PU coating produces neon lighting effects with the same, easy installation and slim profile of tape light


## Technical Information

Series	MicroLux
Input Voltage	24V DC
CCT	3000K / 4000K
CRI	90+
Wattage	4.4W/ft
Lumens	Up to 375Lm/ft
Beam Angle	160°
Max Run	16.4 feet (5 meters)
Cuttable	3.94" (10cm)
IP Rating	IP65*
Dimmable	10-100% ELV
Rating	cULus Listed, Indoor/Outdoor, Wet Locations*
Rated Life	50,000 hrs

\*IP65, wet location rating is void once product is cut



3/8"W  
(9.5mm)

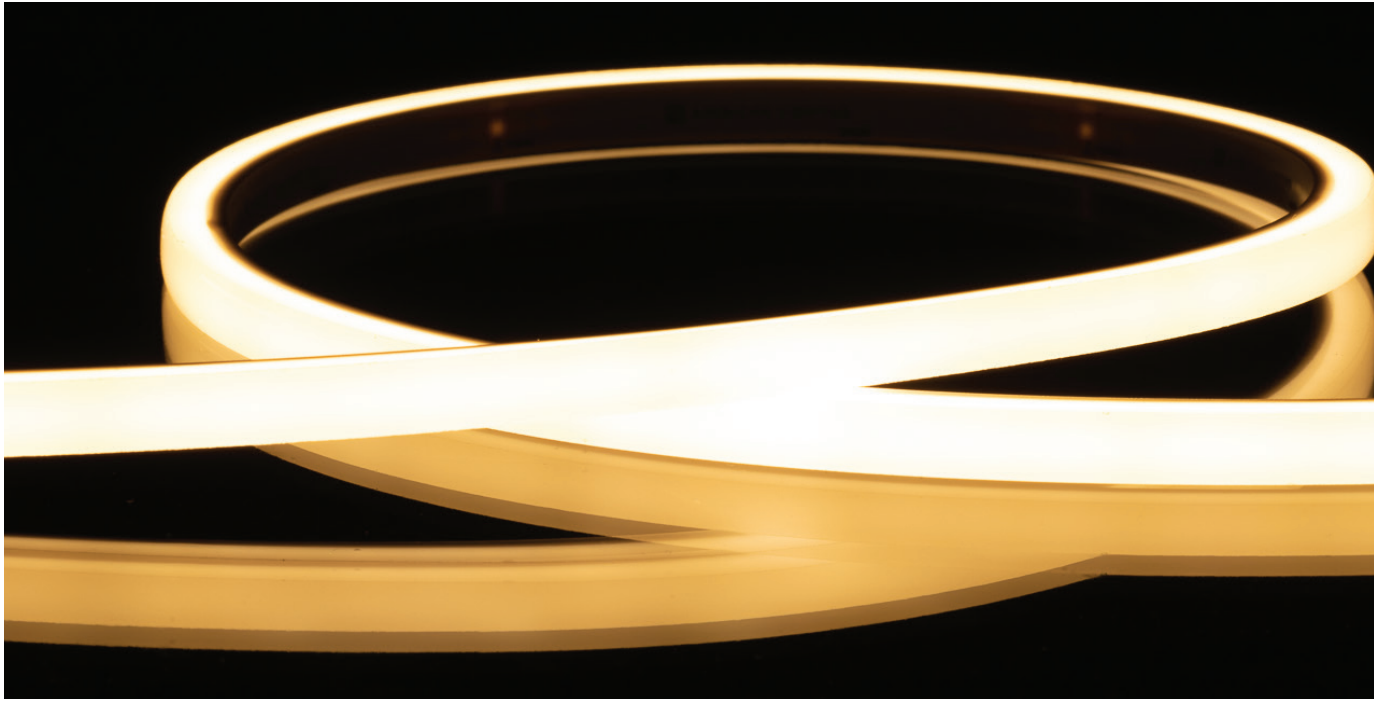

SPEKTRUM+

TRULUX

TASK LIGHTING

DOWNLIGHTING

12V AC

LINEAR LIGHTING

ARCHITECTURAL

POWER SUPPLIES


**MICROLUX - STATIC WHITE ORDERING INFORMATION**

ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING
<b>MLUX-30</b>	24V DC	3000K	16.4 (5m)	370Lm/ft	4.4W/ft	IP67	90+ (White)	3.94" (100mm)
<b>MLUX-40</b>	24V DC	4000K	16.4 (5m)	375Lm/ft	4.4W/ft	IP67	90+ (White)	3.94" (100mm)

MLUX (IP65) 16.4ft Reels include: Attached 3ft Lead Wire & Mounting Clips

**MICROLUX - STATIC WHITE ACCESSORIES**

ITEM NUMBER	DESCRIPTION
<b>MLUX-CONKIT2</b>	Single Color Power Feed (IP54)
<b>MLUX-JUMP2-.5</b>	6" Linking Cable (Single Color)
<b>MLUX-JUMP2-2</b>	24" Linking Cable (Single Color)
<b>MLUX-SPL2</b>	In-line Splice
<b>MLUX-END</b>	End Cap (QTY 10)
<b>MLUX-CLIPS</b>	Mounting Clips (QTY 10)
<b>MLUX-CHAN-3A</b>	1M Deep Mounting Channel
<b>MLUX-CHAN-3B</b>	1M Shallow Mounting Channel
<b>RCWY-PVC-1M</b>	1m Plastic Wire Cover Raceway




MLUX-CONKIT2



MLUX-JUMP2-.5  
MLUX-JUMP2-2




MLUX-SPL2



MLUX-END



MLUX-CLIPS



MLUX-CHAN-3A




MLUX-CHAN-3B



RCWY-PVC-1M

**PRIMARY SIDE DIMMING QUICK SET-UP**



Standard Dimmer



Adaptive Series Power Supply  
(30W / 60W / 96W / 192W / 288W)



MicroLux