


Compact Plunger Operated 3/2-way Valve

6014

NPT 1/8" & NPT 1/4"

- Threaded or flange version
- High quality FKM seal as standard
- Slipped over coil system



Shown with 2509 plug

CLICK ME



FOR DATA SHEET

Direct-acting 3/2-way, normally closed or normally open solenoid valve. The stopper and plunger guide tube are welded together to enhance pressure resistance and leak-tightness. It is for neutral gases and liquids and it is also suitable for technical vacuum.


Technical Data

Temperature media	14 °F to 212 °F (-10 °C to +100 °C)
Ambient temperature	14 °F to 131 °F (-10 °C to +55 °C)
Viscosity	Max. 21 mm ² /s
Voltage tolerance	+10%
Duty cycle	
Single valve	100% continuous rating
for block mounting on sub-base	Intermittent 60% (30 min)
Body material	Brass, Polyamide (Flange), (SS optional)
Seal material	FKM (EPDM on request)
Coil insulation class	Epoxy class H
Coil material	Epoxy
Protection class	IP65, NEMA 4 (with cable plug)
Electrical connection	Cable plug acc. to DIN EN 175301-803 Form A (included)
Accreditations	UL Listed

Orifice [mm]	Power consumption		Response times	
	Inrush AC	Hold AC	Opening [ms]	Closing [ms]
1.5	24 VA	17 VA (8 W)	10-15	15-20
2.0	24 VA	17 VA (8 W)	10-15	15-20
2.5	24 VA	17 VA (8 W)	15-20	10-22

Response times [ms]: Measured at valve outlet at 87 PSI (6 bar) and 68 °F (+20 °C)
Opening: pressure build-up 0 to 90%, **Closing:** pressure relief 100 to 10%

Envelope Dimensions [inch] (see datasheet for details)

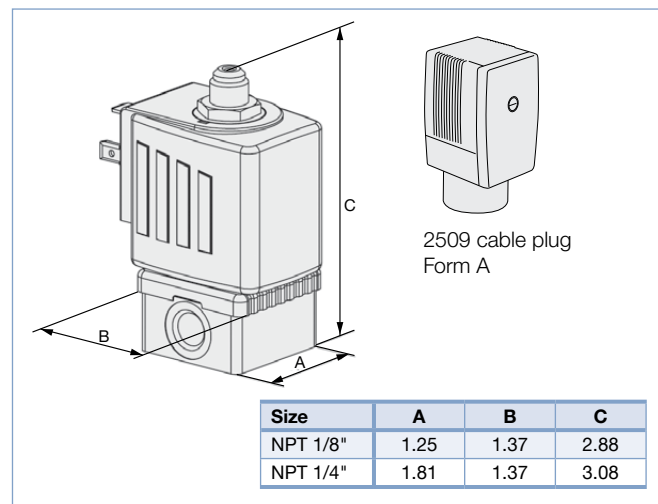

Options

- Cable plug with LED and varistor
- Impulse version
- Oxygen version
- Vacuum version
- Analysis version
- Hazardous area approvals
- Explosion-proof version
- Further circuit functions
- SIL - certificated
- UL and CSA approvals
- 24V/60 Hz, 240/60 Hz

Ordering Chart

Port connection [inch]	Circuit function	Orifice [mm]	Cv	Pressure range [PSI]	Item no. Voltage/Frequency [V/Hz]	
					24 V DC	120 V/60 Hz
Brass						
NPT 1/8	C (3/2-way normally closed)	1.5	0.08	0-232	332738	332733
NPT 1/8		2.0	0.13	0-145	332727	332724
NPT 1/4		2.0	0.13	0-145	332737	332739
NPT 1/4		2.5	0.18	0-87	332722	-
NPT 1/8	D (3/2-way normally open)	1.5	0.08	0-232	332742	-
NPT 1/8		2.0	0.13	0-145	332732	-
NPT 1/4		2.0	0.13	0-145	332721	-
NPT 1/4		2.5	0.18	0-87	332723	-
Stainless steel						
NPT 1/8	C (3/2-way NC)	1.5	0.08	0-232	332720	-
NPT 1/4		2.0	0.13	0-145	332741	332728
NPT 1/8	T (universal)	1.5	0.08	0-101	332729	-