

## New CG510 Rubber Track Flail Brush Cutter



The CG510 is a heavy duty Rubber Track Flail Brush Cutter suitable for a wide range of rough terrains such as riverbeds, farmland, ski slopes, and large areas of open land.

#### Key Features:

- 51 HP powerful Kubota Diesel Engine
- Reversible and Side-Shifting Cutting Head



### **PRODUCT INFO**

- S SERIES
  - ♦ S300PD
  - ♦ S25A
  - ♦ S160
  - ♦ S100A
  - ♦ S100
- SC SERIES
  - ♦ SC75
  - ♦ SC45
- BP SERIES
  - ♦ BFP602
  - ♦ BP419
  - ♦ SC45
- EJ SERIES
  - ♦ EJ20

- Self-Leveling Control Deck
- Heavy duty Rubber Track drive
- 3-point Quick Hitch Mounting Attachment



An automatically leveling control deck and operator platform reduces fatigue and improves operator safety on slopes.



A side shifting cutter head slides up to 20 inches to get to hard to reach brush. Reversible cutting direction for increased productivity.



Floating cutting head automatically adjusts to uneven terrain to maintain consistent cutting depth while reducing wear

and tear on the machine.




Durable flails separate on shackles to reduce impact damage on blades and resist brush tangling.



expel accumulated debris,

keeping the engine cool.





Fully opening Engine cover for ease of maintenance.

#### **CG510 SPECIFICATIONS**

Length x Width x Height (in.) Speed (mph)

Weight (lbs.)

Engine

144 x 67.7 x 64.4 High range: 0-6 Low range: 0-4.4 4,850 Water Cooled 4 Cycle 4 Cylinder Diesel

#### CG SERIES

- ♦ CG510
- ♦ CG431
- ♦ CG101

## CMX SERIES

- ◆ CMX1402
- ♦ CMX2402

### **Recent Posts**

Now Available! Propane Powered Concrete Buggy with 180° Pivoting Deck

**Rated Output (HP)** 


Cutting Dimensions
Width x Height (in.)
Gradeability (degree)

35

Parts List (Coming Soon)

The Parts List for this product is not yet available.

# Download Printable Catalog

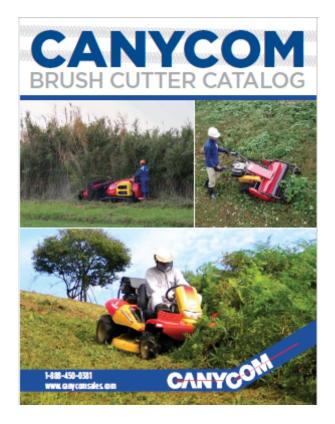

(4-Page PDF Size: 1.9MB) \* To view this file, you need Adobe Acrobat Reader. For free download, click <u>here</u>.

> ©2015 Canycom USA, Inc. PO Box 58190 Tukwila, WA 98138 | P:888-450-0381 / 425-450-0381 | F:360-800-6757

> > A SiteOrigin Theme