

Features & Benefits

- ExactRead™ technology for exact match from meter to website
- Affordable and reliable remote meter reading with streamlined design
- More frequent data for timely water management decisions
- Pre-assembled on new meters for simplified installation
- Retrofits on existing meters in less than 30 minutes



Applications

- Billing and accounting
- Conservation
- Regulation and allocations
- Planning and development
- Operations and metering

Compatibility

- Mc Propeller - Mechanical and Digital Registers
- Water Specialties Propeller - Digital Register ONLY

Telemetry System for Mc Propeller™ and Water Specialties™ Flow Meters

Your trusted partner for water meters now offers an innovative built-in remote meter reading option, FlowConnect.

McCrometer's latest development in flow metering technology provides districts, growers, and irrigators with a new solution to meter data collection.

This built-in telemetry system for McCrometer Flowmeters is designed to provide easy access to meter data without requiring additional hardware.

FlowConnect can be added to any new or existing McPropeller or Water Specialties Propeller flowmeter.

TECHNICAL AND PERFORMANCE SPECIFICATIONS

Communication

Network Type	Cellular	Satellite
Protocols	GSM/GPRS	Iridium
Operating Frequency (MHz)	824–849 869–894 1850–1910 1930–1990 1710–1755	1616-1626.5
Antenna	External Bulkhead Extension TNC Antenna 800/1800/1900 MHz	External Bulkhead Extension TNC Antenna 1,600 Mhz

Power

Batteries	Batteries can be replaced by user on-site Battery Only: 2 Primary D-Cells 3.6V 13Ah (Both batteries need to be replaced at the same time) Rechargeable: 1 Primary D-Cell 3.6V and 3 Secondary C-Cells, 1.2V in series
External Power	Requires Rechargeable Battery Configuration listed above. Recommended 9-12 VDC, 0-1000mA Max: 14.5 VDC (Power supply or solar panel)
Recommended Battery Replacement Interval	Battery Only: 3 years (Daily Report Interval) Rechargeable: 4 years

Environmental

Operating Temperature	- 30°C to 70°C (-22°F to 158°F)
Electrical / Mechanical Protection	All electrical components are grounded to fluid column and pipe. Manufactured in accordance with IP-67 Standards and ESD-safe
Environmental Protection	Ingress Protection (Dust Tight / Water Tight) to IP67 Vibration proof while operating: Validated Vibration and 20G Sinusoidal testing to JEDEC 22B103B Section 4.3, Table 3, Service Condition C, for all axis and 20G sin sweep 20 - 2,000Hz for all axis.
Tamper Protection	Factory installed tamper-evident wire lock system

Other Characteristics






Mounting	Top Plate compatible with any McCrometer Propeller or Water Specialties (Digital Register Only)
External Interface	Five-pin serial-USB cable
Flow Indicator	Digital Register or McPropeller Mechanical Register
Operating Temperature	- 30°C to 70°C (-22°F to 158°F)
Inputs	Two analog sensors, 1 pulse accumulator (for rain gauge)
Outputs	Mechanical Register: None Digital Register: 4-20 mA, Open Collector Pulse, Dry Contact Pulse, Optically Isolated Pulse (via 5-pin output cable)
Data Collection Method	Digital Register: Serial interface between FlowConnect and digital register allows FlowConnect to read totalizer and rate value directly. No pulse counting required and always a perfect match. Mechanical Register (McPropeller only): Pulse counter and high-low digital signal for forward-reverse pulses. Accuracy between meter and Web totalizer: ±0.25%
Data Storage	Capable of storing up to 1,000 reports in local memory

Accessories

Optional Protective Cover	Gray boot cover, p/n TOB065	
Serial Accessories	200.720.542 serial-USB cable	
Power Accessories	Rechargeable: 200.733.522 5W 540 mA Solar Panel 200.720.523 115V Power Supply Battery Only: No Power Accessories	
Sensor Accessories	Adcon PA1 Cables - Pressure 10bar 500.000.120 - 16 ft. Cable 500.000.119 - 32 ft. Cable 200.733.048 - RGI Rain Gauge 200 200.720.510 - Y Cable 200.733.902 - A902 1/2/3 Cable	
Communication Accessories	Cellular	Satellite
	900.000.590 TNC Rigid Antenna (Included) 900.000.565 Directional Antenna 900.000.567 Extension Antenna	TOB039 Helical Antenna (Included) MCC-510-AI-A Extension Antenna, Magnet Mount

Dimensions

Network Type	Cellular	Satellite
Unit Enclosure Size	W x D x H	W x D x H
Non-Rechargeable	6.5" x 5.6" x 9.9"	6.5" x 5.6" x 9.8"
Rechargeable	6.5" x 6.1" x 9.9"	6.5" x 6.1" x 9.8"
Packaged Dimensions	11" x 11" x 11"	11" x 11" x 11"
Packaged Weight	6 lbs.	6 lbs.

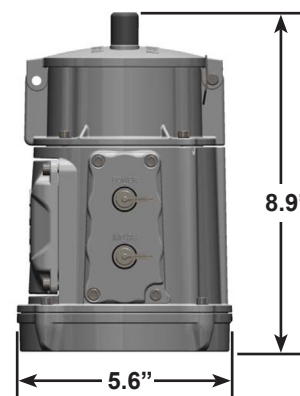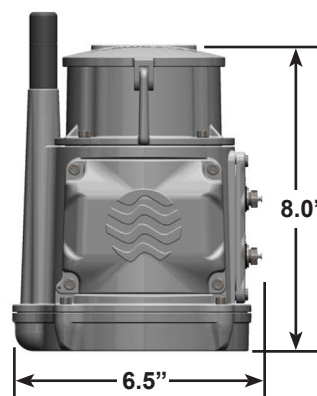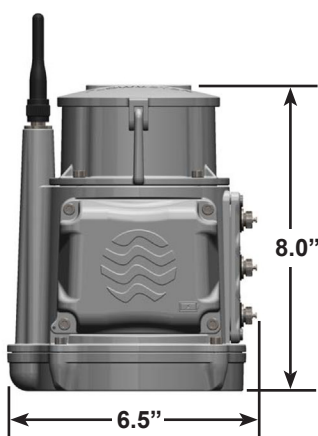

Note: The models shown above are used as general examples of the most common features and may not necessarily represent your particular model.

FLOWCONNECT PART NUMBER STRUCTURE

FC5		-
Product Line		
MC Propeller	00	
Water Specialties Propeller	01	
Installation Configuration Options		
With New Meter	A	
Replacement	B	
Converting from MC/WS with Mechanical Register	C	
Converting from MC/WS with FlowCom Register	D	
Converting from MC/WS with FlowCom Remote Register	E	
Battery Options		
Non-Rechargeable Batteries	B	
Rechargeable Batteries	R	
Modem Options		
Verizon LTE (Celluar) Modem	C	
AT & T LTE (Cellular) Modem	A	
IRIDIUM (Satellite) Modem	S	
Orbcomm (Satellite) Modem	G	
Register Options		
Digital Register	D	
Digital Register Non-Programmable	N	
Output Options		
No Outputs	-	
Open Collector Pulse	1	
4-20mA & Opto Isolated Pulse	2	
4-20mA & Dry Contact Pulse	3	
Output Cable Options		
No Output Cable	-	
Output Cable 6ft	C1	
Output Cable 15ft	C2	
Output Cable 25ft	C3	
Output Cable 50ft	C4	
Remote Input Cable Options		
Meter Mount, No Remote Input Cable	-	
Remote Mount w/ 6ft Cable	R06	
Remote Mount w/ 25ft Cable	R25	
Remote Mount w/ 50ft Cable	R50	
Antenna Options		
Meter Mount Antenna	-	
Extension Satellite Antenna, 8ft	A	
Directional Cellular Antenna	B	
Cellular Antenna Extension, 16ft	C	
Solar Panel & Power Options		
No Solar Panel	-	
5.1 Watt Solar Panel	E	

Copyright © 2022 McCrometer, Inc. All printed material should not be changed or altered without permission of McCrometer. Any published pricing, technical data, and instructions are subject to change without notice. Contact your McCrometer representative for current pricing, technical data, and instructions.

3255 WEST STETSON AVENUE • HEMET, CALIFORNIA 92545 USA
TEL: 951-652-6811 • 800-220-2279 • FAX: 951-652-3078
www.mccrometer.com

