



More information on the website
mirror.radwag.com/en/info,w1,EMU

PA-04/H Automatic Feeder



The drawings, photos and graphics used are for illustrative purposes only.

Datasheet

Construction	
Protection class	IP 34
Communication interface	
Communication interface	RS232
Electrical parameters	
Power supply	100 – 240 V AC 50/60 Hz
Power consumption	95 W
Environmental conditions	
Operating temperature	+5 – +40 °C
Physical parameters	
Device dimensions	229×229×303 mm
Net weight	17 kg
Gross weight	26 kg
Diameter of fed objects	ø 3 – ø 25 mm

Feeder diameter	ø 180 mm
Throughput	1 – 15 pcs/min
Controlling	external, from balance level





Compatible with

XA 5Y.A Analytical Balance
Antivibration Tables
XA 5Y.M.A Microbalance

RS 232, RS 485 cables
XA 5Y Analytical Balance
XA 5Y.M Microbalance

Device dimensions

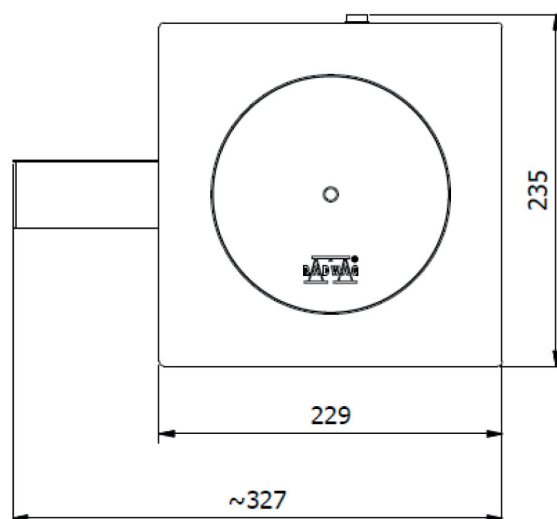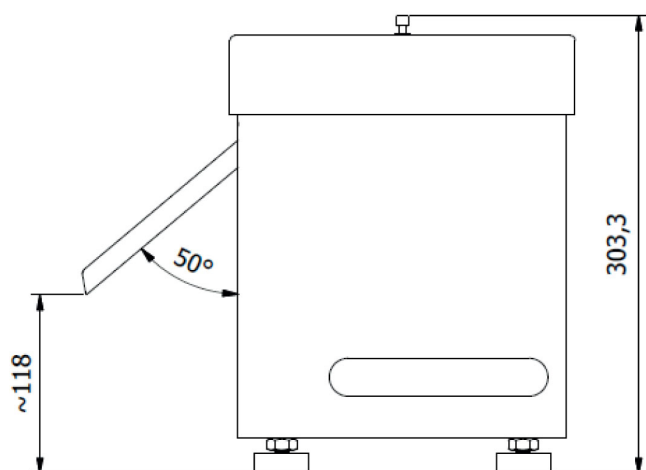

PA-04/H Automatic Feeder