


Features

Provides eight 70 volt transformer powered outputs for the Intelix Audisey Athena matrix

Small, compact design


Ideal for corporate boardroom, council room, house of worship, education, government, retail, themed environment, and restaurant and bar applications.



The Intelix Audisey 70V-AM provides eight 70 volt outputs for the Intelix Audisey Athena matrix mixer and amplification system. One 70V-AM module is required with an Athena-8 system and two 70V-AM modules are required with the Athena-16 system.

The rack and panel style connector provides a single, quick connection point between the Athena and 70V-AM.


Design with Intelix and Design with Intelligence.

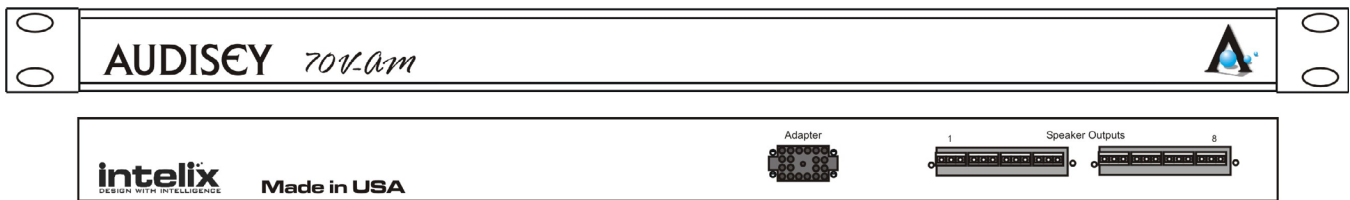

Specifications

INPUTS

Input	8 ohm, 50 watt
Output	70V, 50 watt, 0.86 amp
Size	1 RU
Shipping Weight	25 lbs.
Input Connector Style	Rack and panel style
Output Connector Style	Screw terminal
Transformer Style	Toroid
Intelix Part Number	70V-AM

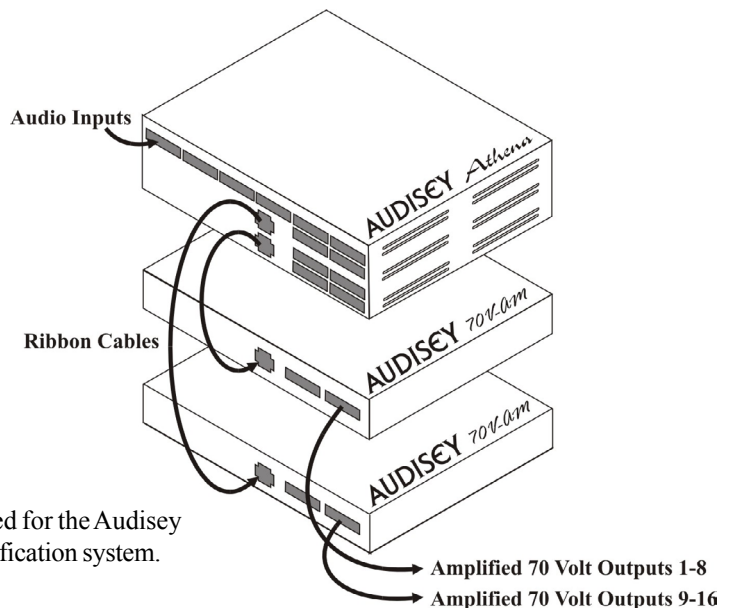

Two 70V-AM modules are required for the Audisey Athena-16 matrix mixer and amplification system.