








The VS-4E is a high-performance single crosspoint switcher for composite video and unbalanced audio signals. It independently switches any one of four audio and/or video signals to a single audio and/or video output.

## **FEATURES**

- High Bandwidth 475MHz (-3dB).
- Mechanical (Passive) Switching No power required.
- Separate Audio & Video Switching 1 crosspoint (each).
- Desktop Size Compact size. 2 units can be rack mounted side-by-side in a 2U rack space with the optional RK-4E/S adapter.

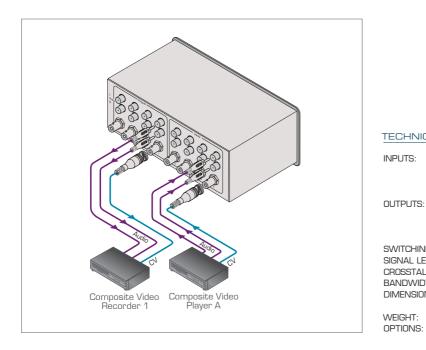

## TECHNICAL SPECIFICATIONS

INPUTS: 4 video,  $1Vpp/75\Omega$  on BNC

connectors;

4 audio stereo, +4dBu typ. on RCA

connectors.

4 video,  $1Vpp/75\Omega$  on BNC connectors;

4 audio stereo, +4dBu typ. on RCA connectors.

SWITCHING SYSTEM: Mechanical, "break-before-make". SIGNAL LEVELS: Up to 3Vpp video, +3OdBu audio. CROSSTALK: -42dB chroma, -60dB sync. BANDWIDTH (-3dB): 475MHz.(video), 100kHz.(audio). DIMENSIONS:

18.8cm x 7cm x 7cm (7.4" x 2.7" x 2.7") W, D, H. O.65kg (1.4lbs) approx. RK-4E/S 19" rack adapter. WEIGHT: OPTIONS:

