


VS-41H/VS-81H/VS-161H (VS-41HDMI/VS-81HDMI/VS-161HDMI*)


4x1, 8x1, 16x1 HDMI Switcher

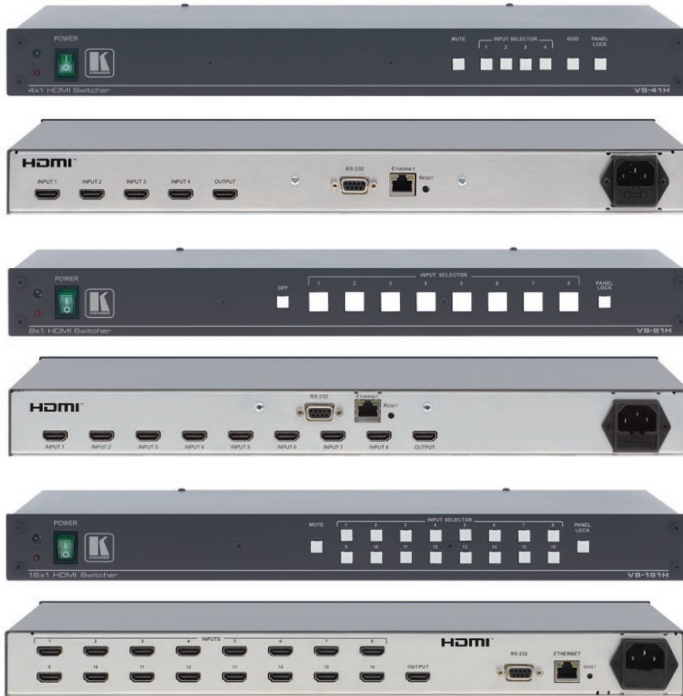

The **VS-41H**, **VS-81H**, and **VS-161H** are high-performance switchers for HDMI signals. They reclock and equalize the signal and switch one of the 4, 8, or 16 inputs to a single HDMI output.

FEATURES

- Max. Data Rate - 2.25Gbps.
- HDCP & HDMI Compliant.
- HDTV Compatible.
- HDMI Support - HDMI (V.1.4 with Deep Color, x.v.Color™, Lip Sync, HDMI Uncompressed Audio Channels, Dolby TrueHD, DTS-HD, CEC).
- 3D Pass-Through.
- EDID PassThru - Passes EDID/HDCP signals from source to display.
- Dual Mode - PC and DVD Modes selectable by input.
- Flexible Control Options - Front panel, RS-232 (K-Router™ Windows®-based software is included), Ethernet & IR remote (included).
- Video Disconnect.
- Front Panel Lockout.
- Kramer Equalization & re-Klocking™ Technology - Rebuilds the digital signal to travel longer distances.
- Worldwide Power Supply - 100-240V AC.
- Standard 19" Rack Mount Size - 1U. Rack "ears" included.

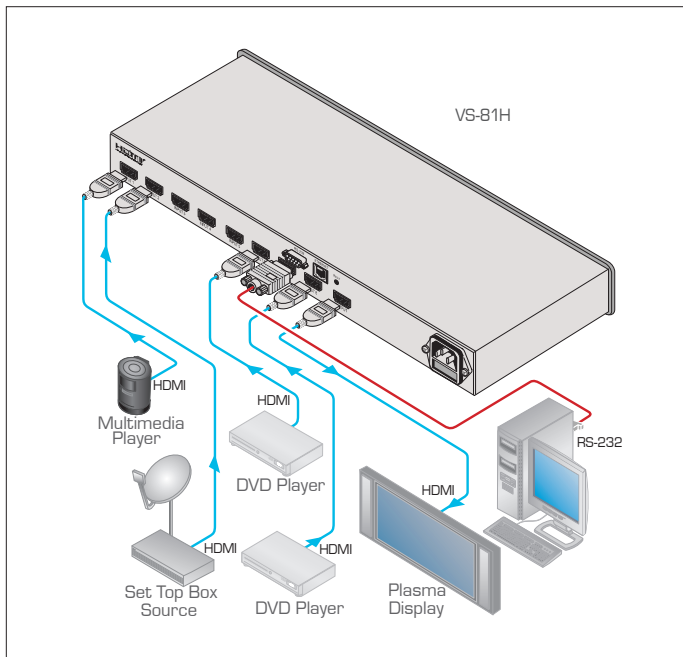

*Previous product name

TECHNICAL SPECIFICATIONS

INPUTS:	4/8/16 HDMI connectors.
OUTPUT:	1 HDMI connector.
BANDWIDTH:	Supports up to 2.25Gbps bandwidth per graphic channel.
COMPLIANCE WITH HDMI STANDARD:	Supports HDMI and HDCP.
RESOLUTION:	Up to UXGA; 1080p, deep color.
POWER SOURCE:	100-240V AC, 50/60Hz, 10VA.
CONTROLS:	Front panel buttons, infrared remote control transmitter, RS-232, Ethernet.
DIMENSIONS:	19" x 7" x 1U W, D, H, rack mountable.
WEIGHT:	2.5kg (5.5lbs) approx.
ACCESSORIES:	Power cord, rack "ears".
OPTIONS:	Kramer HDMI cables.

