
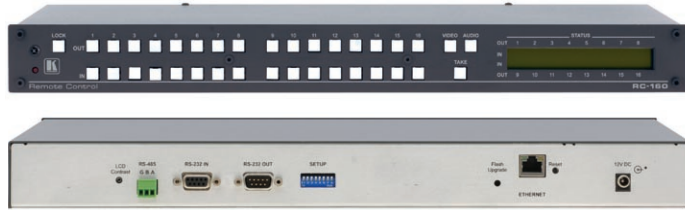


# RC-160

## 16x16 Master Remote Control Panel




### FEATURES

- **Take Button** - Executes multiple switches all at once.
- **Front Panel Lockout.**
- **Flexible Control Options** - Front Panel, Ethernet, 2 RS-232 (one input, one output) with K-Router™ Windows®-based software, RS-485 and IR remote (included).
- **Standard 19" Rack Mount Size** - 1U. Rack "ears" included.

The **RC-160** is a remote control panel for Kramer switchers with RS-232 and RS-485 control interfaces. It can control any Kramer switcher up to 16x16 that utilizes Kramer's Protocol 2000 RS-232 command set.

CONTROL SYSTEMS

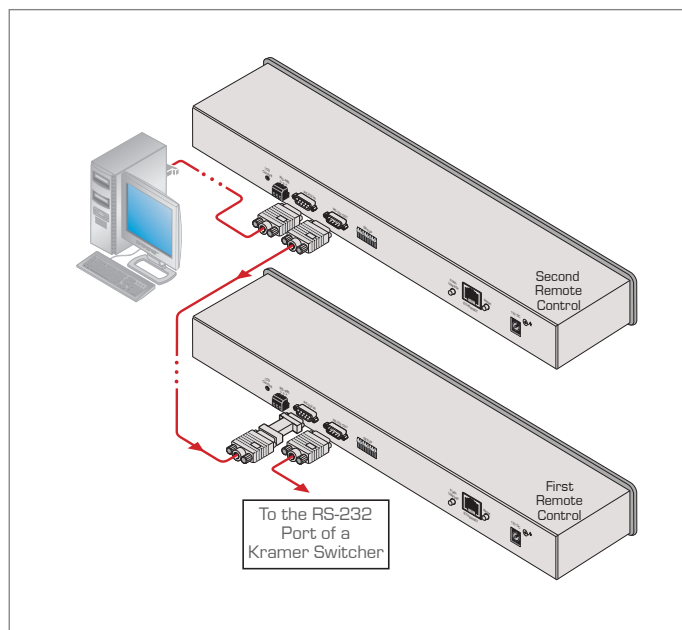

### TECHNICAL SPECIFICATIONS

- INPUT/OUTPUT:** 2 RS-232 IN/OUT on 9-pin D-sub connectors; 1 RS-485 connector on detachable terminal blocks; 1 ETHERNET CAT 5 port.
- CONTROLS:** Front panel buttons, RS-232, RS-485, Ethernet and IR, LCD contrast trimmer.
- POWER SOURCE:** 12V DC, 130mA.
- DIMENSIONS:** 19" x 7" x 1U W, D, H, rack mountable.
- WEIGHT:** 2.7kg (6lbs) approx.
- ACCESSORIES:** Power supply, null-modem adapter, Windows®-based Kramer control software, Windows®-based Configuration Manager, infrared remote control transmitter, rack "ears".

