

RC-3000


Master Programmable Remote Control Panel



The **RC-3000** is a programmable remote control for Kramer switchers with RS-232 and RS-485 control. Up to 15 RC-3000s can control up to 15 Kramer switchers in a single system.

FEATURES

- **Memory Locations** - Stores up to 8 multiple switches as presets to be recalled and executed when needed.
- **ALL/OFF Controls** - Sends one input to all outputs and can disconnect all outputs or turn off individual outputs.
- **Audio Breakaway Switching.**
- **Flexible Control Options** - Front panel, RS-232 (K-Router™ Windows®-based software is included), RS-485, contact closure & external keyboard up to 128 input/output combinations.
- **Standard 19" Rack Mount Size - 2U.**

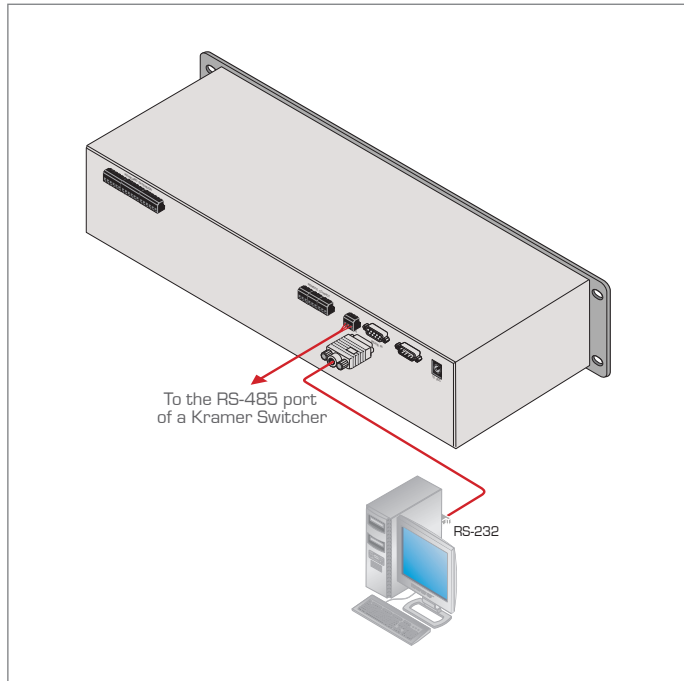

TECHNICAL SPECIFICATIONS

- INPUT/OUTPUT:** 2 RS-232 IN/OUT on 9-pin D-sub connectors; 1 RS-485 connector on detachable terminal blocks; 9-pole, remote dry contact connector on detachable terminal blocks; 18-pole, keyboard extension connector on detachable terminal blocks.
- SETTING MEMORY:** 8 immediate setups for fast access and retrieval.
- CONTROL:** Front panel keys, RS-232, RS-485, contact closure switches, external keyboard.
- POWER SOURCE:** 12V DC, 800 mA.
- DIMENSIONS:** 19" x 7" x 1U W, D, H, rack mountable.
- WEIGHT:** 1.7kg (3.8lbs) approx.
- ACCESSORIES:** Power supply, Windows®-based control software.

