












The RC-80 is a programmable remote control panel for Kramer switchers with RS-232 and RS-485 control interfaces. It controls any Kramer switcher that utilizes Kramer's Protocol 2000 RS-232 command set and is up to 8x8 in size.

FEATURES

- Take Button Executes multiple switches all at once.
- Front Panel Lockout.
- Flexible Control Options Front panel, Ethernet, 2 RS-232 (one input, one output) with K-Router $^{\text{TM}}$ Windows $\!\!\!\!\text{@-based}$ software, RS-485 and IR remote (included).
- Input/Output Display LED.
- Standard 19" Rack Mount Size 1U. Rack "ears" included.

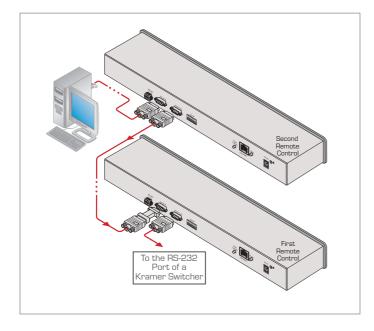

TECHNICAL SPECIFICATIONS

INPUT/OUTPUT:

CONTROLS:

DIMENSIONS:

2 RS-232 IN/OUT on 9-pin D-sub connectors;

1 RS-485 connector on detachable terminal

blocks; 1 ETHERNET CAT 5 port. Front panel buttons, RS-232, RS-485,

Ethernet and IR, LCD contrast trimmer. POWER SOURCE: 12V DC, 200mA.

19" x 7" x 1U W, D, H, rack mountable.

WEIGHT: 2.7kg (6lbs) approx.

ACCESSORIES: Power supply, null-modem adapter,

Windows®-based Kramer control software, Windows®-based Configuration Manager, infrared remote control transmitter, rack

"ears".

