

# MegaVox PRO PA System

MADE IN USA



SIX YEAR WARRANTY

## Technical Specifications

Thousands report the MegaVox PRO as the most reliable Public Address system on the market. Emergency responders like its signal alert siren, wired microphone and convenient shoulder strap. Coaches, band directors and auctioneers appreciate the flexibility of the AC/DC operation and the range of the wireless microphones.

With the MegaVox Pro you're ready for any situation . . . it's lightweight, loud & easy to carry. Just grab it and go!

## Features

True AC/DC, 110/220V power supply

40W AC/ 20W DC

Reaches crowds of 1,000+

Lightweight - Only 15 lbs

High-efficiency re-entrant horn driver

Powerful horn amplifier

Up to two built-in 16-channel UHF wireless receivers

Built-in rechargeable battery runs up to 10 hours on a charge

Microphone with coil cord


Signal alert button

External speaker output

External output powers optional MegaVox Pro companion speaker

Durable injection-molded case is tough, fade resistant & UV treated


Speaker stand receptacle molded into case bottom

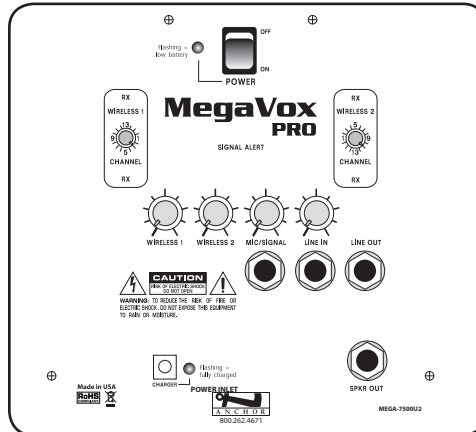

(MEGA-7500U2 Back Panel Shown)

## MEGAVOX MODELS

- MEGA-7500 Battery powered PA system wired microphone & built-in rechargeable battery
- MEGA-7500U1 One built-in wireless receiver
- MEGA-7500U2 Two built-in wireless receivers
- MEGA-7501 Unpowered companion speaker

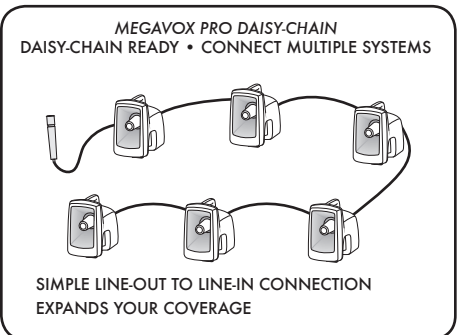

## UHF WIRELESS

- WH-6000 Wireless handheld microphone/transmitter
- WB-6000 Wireless body-pack transmitter (requires handsfree microphone)  
Microphone options include:  
Over-the-Ear/EM-TA4F, Lapel/LM-60,  
Collar/CM-60, Headband/HBM-TA4F

## TECHNICAL SPECIFICATIONS

Rated Power Output	22 watts
Max SPL @ Rated Power	126 dB @ 1 meter
Frequency Response	400 Hz - 10 kHz
Charger (RC-6000)	18V DC/universal input (100Vac - 240Vac, 50 - 63Hz)
Battery	12 volt rechargeable, 5.4 AH
Dimensions (HWD)	13" x 9" x 14" (33 x 23 x 36 cm)
Weight	15lbs / 6.8 Kg

Inputs	
Line	Hi-Z, unbalanced, 1/4"-phone
Mic 1	Lo-Z, unbalanced, 1/4"-phone (used for wireless on MEGA-6000U1)
Mic 2	Lo-Z, unbalanced, 1/4"-phone
Outputs	
Line (post fader)	Lo-Z, 1/4"-phone
Speaker Out	4Ω, unswitched, 1/4"-phone



**Anchor Audio, Inc.**  
Portable Sound Systems • Carlsbad, California

(Features & Specifications Subject to Change Without Notice)

**800.262.4671**

[www.anchoraudio.com](http://www.anchoraudio.com)

S-MV/0810