



# PROFESSIONAL CD PLAYER with Digital Pitch Control



#### **General Information**

Professional Grade CD Player with Remote Control 32 Track Selection Random Memory Programming □ 16-bit Digital/Analog Converter Auto-Cue with LED Indicator Intro Check Play with Track Calendar Display Multi-Repeat Functions: **Single Track Repeat All Tracks Repeat Programmed Tracks Repeat** Shuffle Play **A/B Repeat Continuous Shuffle Repeat** Variable Speed with Pitch Control ± 6% Quick Track Search Headphone Jack with Level Control High Luminosity Digital Fluorescent Display □ Time Display (Total/Elapsed/Remaining) Rack Mounting with Optional U Rack Mounting Kit PRM1440 PITCH CONTROL Auto-Cue Direct Disc Access

- Professional Audio Applications
- □ Intro-Check Search Function

#### Specifications

Channels: Frequency Response: Signal to Noise Ratio: Dynamic Range: Wow and Flutter: T. H. D.: Channel Separation: Laser Pickup: Digital Filter: Converters: Random Programming: Pitch Control: Repeat Functions:

Output Level: Headphones Output: Headphones Control: Power Requirement: Power Consumption: Dimensions:

Finish: Net Weight: Terminations: Optional Rack Mounting: 2 Channel Stereo 20 - 20,000 Hz ± 1.5 db 85 db (1 Khz) 90 db Unmeasurable <0.02% at 1 Khz > than 80 db Laser High Resolution 16 bits Linear Linear 16 bit Dual Digital/Analog 32 Selection Random Memory Variable ± 6% Single Track Repeat, Single Disc Repeat, Programmed Tracks Repeat, Shuffle Play, Shuffle Repeat 1.0 Volt RMS 1 mWatt at 8 ohm **Output Level Control** 120 V 60 Hz 12 Watts 17 1/8" W., 4" H., 11.5" D 435 x 104 x 290 mm Matte Black 8 Lb (3.7 Kg) **RCA Standard Jacks** 

Paso Model PRM1440 Rack Kit (2U)

Engineering leadership in sound products since 1931

Specifications are subject to change without notice




## Rack Mounting Rack Kit PRM1440



## **TECHNICAL DATA**

#### **PCDP1440**

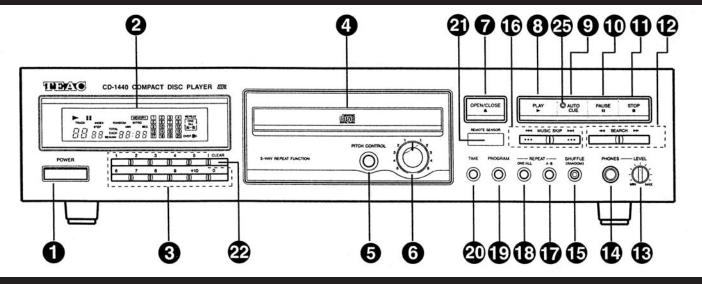

#### **Front Panel Controls**

#### 1 POWER Switch 2 Multi-function display window A ► (play) indicator B ■ (pause) indicator C INDEX indicator D RANDOM indicator

- E INTRO Check indicator
- **(F) MEMORY** indicator
- G Music calendar display
- (H) REPEAT (ONE, ALL, A-B) indicator
- () OVER indicator
- J TIME(MIN, SEC) indicator
- **(K)** TOTAL indicator
- (L) EACH indicator
- M REMAIN indicator
- N STEP indicator
- 3 10 Key button (0, ~ +10)
- O Disc tray
- S PITCH CONTROL on/off button 6 PITCH CONTROL knob
- SEARCH button( B PHONES LEVEL control knob PHONES jack B SHUFFLE button MUSIC SKIP buttons( REPEAT A-B button BREPEAT ONE/ALL button PROGRAM button TIME button REMOTE SENSOR CLEAR button CHECK button INTRO Check button

OPEN/CLOSE button(<u>)</u>)

B PLAY button(►)


AUTO CUE button

PAUSE button(II)

STOP button(■)

AUTO CUE indicator


#### **Rear Panel View**






CHARLESTON, SOUTH CAROLINA 29406-6511 USA Phone: 843 308 9005 - Fax: 843 308 0904 EMAIL: info@pasosound.com - URL: www.pasosound.com

FORM NT 255 RV 2.5



## **Digital Display**



### AUTHORIZED DISTRIBUTOR