


VS-81AYC


8x1 s-Video & Stereo Audio Mechanical Switcher



The **VS-81AYC** is a high-performance switcher for s-Video (Y/C) and unbalanced audio signals. It switches any one of eight audio and video signals to a single audio and video output.

FEATURES

- Bandwidth (Y) - 350MHz (-3dB).
- Mechanical (Passive) Switching - No power required.
- Standard 19" Rack Mount Size - 1U.

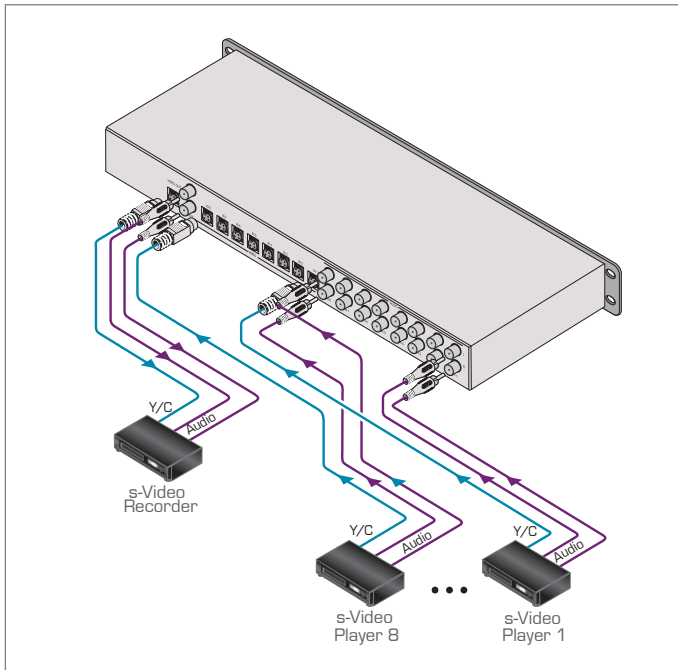

TECHNICAL SPECIFICATIONS

INPUTS:	8 s-Video, 1Vpp/75Ω (Y), 0.3Vpp/75Ω (C) on 4-pin connectors; 8 unbalanced stereo audio on RCA connectors.
OUTPUTS:	1 s-Video, 1Vpp/75Ω (Y), 0.3Vpp/75Ω (C) on a 4-pin connector; 1 unbalanced stereo audio on RCA connectors.
SWITCHING SYSTEM:	Mechanical, break-before-make.
CROSSPOINTS:	1 of 8.
SIGNAL LEVELS:	Up to 3Vpp video (Y), +30dBu audio.
BANDWIDTH(-3dB):	Video: 350MHz (Y); Audio: 100kHz.
DIMENSIONS:	19" x 7" x 1U W, D, H, rack mountable.
WEIGHT:	1.4kg (3.1lbs) approx.

