

#### **PDT Series Model Details on Facing Page**


Includes SignalSafe™ Power Cord Technology



96-01031 product 3

Typical 20 outlet 15 Amp

Typical 16 outlet 15 Amp



Typical 16 outlet 20 Amp

Spec. # 96-01031 for full

Typical 20 outlet 20 Amp



1-7/16'



Includes SignalSafe™ Power Cord Technology


Typical 8 outlet (can also be rackmounted with PB-XS bracket, see below)



96-976 for full

Typical 24 outlet





**PD Dimensions** 

\_1-5/8"

#### PD Series **Model Details on Facing Page**

Includes SignalSafe™ Power Cord Technology

96-938

nroduct



KOHS OF THE SE


Typical 24 outlet


# **Additional Mounting Brackets**


PB-90 bracket orients power outlets on any vertical power strip to the front or back of the enclosure\*. Allows mounting of power strips alongside mounted equipment in wider WRK Series racks. Use PB-5A brackets to mount Middle Atlantic Products power strips in AXS, Slim 5, RL, RLA and MK Series racks, or to the rackrail of any rack. To mount power strips in the SR and DWR Series wall racks, use PB-DWR brackets. PB-XS rackmounting power bracket mounts any **c** power strip between rackrail of any rack, includes cable management tie points. Cable management clips available for PDT Series power strips, sold in packs of 6.

Part #	Description
PB-90	brackets mount vertical power to face front or back of any rack* (pair)
PB-5A	brackets to mount vertical power strips on rear rackrail (pair)
PB-DWR	brackets to mount vertical power strips in DWR & SR Series wall racks (pair)
PB-XS	bracket to horizontally rackmount <b>C</b> power strips

\*Requires LBFR-5A-xx to mount inside Slim 5 or AXS Series Racks








### **PDT Series**

**(II)** 

	Part #	Chassis Style	Chassis Length	Amperage	# of Outlets	Outlet Type	Termination	Protection	Racks Coded	Local Meter	Standard Number
	PDT-1015C-RN	PDT	37-3/4"	15 Amp	10	5-15R	9' cord w/NEMA 5-15P Plug	2-stage surge w/remote notification & circuit breaker	G	No	1, 2, 3, 4
	PDT-1015C-NS	PDT	37-3/4"	15 Amp	10	5-15R	9' cord w/NEMA 5-15P Plug	circuit breaker only	G	No	1, 3
	PDT-1015C-NS20	PDT	37-3/4"	15 Amp	10	5-15R	20' cord w/NEMA 5-15P Plug	circuit breaker only	G	No	1, 3
15 Amp	PDT-1015C-M-NS	PDT	37-3/4"	15 Amp	10	5-15R	9' cord w/NEMA 5-15P Plug	circuit breaker only	G	Yes	1, 3
	PDT-1615C-NS	PDT	33-1/2"	15 Amp	16	5-15R	9' cord w/NEMA 5-15P Plug	circuit breaker only	Ε	No	1,3
	PDT-2015C-RN	PDT	72-3/4"	15 Amp	20	5-15R	9' cord w/NEMA 5-15P Plug	2-stage surge w/remote notification & circuit breaker	T	No	1, 2, 3, 4
	PDT-2015C-NS	PDT	72-3/4"	15 Amp	20	5-15R	9' cord w/NEMA 5-15P Plug	circuit breaker only	T	No	1,3
	PDT-2015C-M-NS	PDT	72-3/4"	15 Amp	20	5-15R	9' cord w/NEMA 5-15P Plug	circuit breaker only	T	Yes	1,3
	PDT-1020C-NS	PDT	37-3/4"	20 Amp	10	5-20R	9' cord w/NEMA 5-20P Plug	circuit breaker only	G	No	1,3
	PDT-1620C-NS	PDT	33-1/2"	20 Amp	16	5-20R	9' cord w/NEMA 5-20P Plug	circuit breaker only	E	No	1, 3
	PDT-2020C-NS	PDT	72-3/4"	20 Amp	20	5-20R	9' cord w/NEMA 5-20P Plug	circuit breaker only	T	No	1, 3
20 Amp	PDT-2020C-RN	PDT	72-3/4"	20 Amp	20	5-20R	9' cord w/NEMA 5-20P Plug	2-stage surge w/remote notification & circuit breaker	T	No	1, 2, 3, 4
	PDT-2020C-M-NS	PDT	72-3/4"	20 Amp	20	5-20R	9' cord w/NEMA 5-20P Plug	circuit breaker only	T	Yes	1,3
	PDT-2020TL-NS	PDT	72-3/4"	20 Amp	20	5-20R	9' cord w/NEMA L5-20P Plug	circuit breaker only	T	No	1,3
	PDT-2020TL-M-NS	PDT	72-3/4"	20 Amp	20	5-20R	9' cord w/NEMA L5-20P Plug	circuit breaker only	T	Yes	1, 3

### **PD Slim Series**



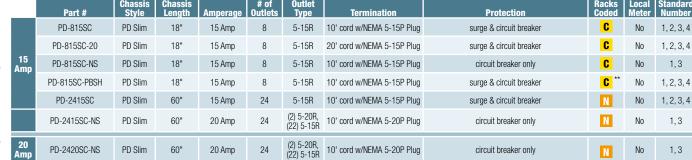



- \*\*Also fits on rear edge of RSH, RC, and CAP rackshelves
- 1. Conforms to UL Standard 1363
- 2. Conforms to UL Standard 1449, 3rd Ed.
- 3. Certified to CSA Standard C22.2 No. 21 4. Certified to CSA Standard C22.2 No. 8
- 5. Conforms to UL Standard 1640
- 6. Certified to CSA Standard C22.2 No. 14M91

## **PD Series**



		Part #	Chassis Style	Chassis Length	Amperage	# of Outlets	Outlet Type	Termination	Protection	Racks Coded	Local Meter	Standard Number
		PD-615C	PD	26-1/2"	15 Amp	6	5-15R	9' cord w/NEMA 5-15P Plug	surge & circuit breaker	E	No	1, 2, 3, 4
		PD-615C-NS	PD	26-1/2"	15 Amp	6	5-15R	9' cord w/NEMA 5-15P Plug	circuit breaker only	E	No	1,3
	15	PD-1015C	PD	40"	15 Amp	10	5-15R	9' cord w/NEMA 5-15P Plug	surge & circuit breaker	J	No	1, 2, 3, 4
	Amp	PD-1015C-NS	PD	40"	15 Amp	10	5-15R	9' cord w/NEMA 5-15P Plug	circuit breaker only	J	No	1, 3
		PD-1415C	PD	57"	15 Amp	14	5-15R	9' cord w/NEMA 5-15P Plug	surge & circuit breaker	N	No	1, 2, 3, 4
		PD-1415C-NS	PD	57"	15 Amp	14	5-15R	9' cord w/NEMA 5-15P Plug	circuit breaker only	N	No	1, 3
		PD-620C-NS	PD	26-1/2"	20 Amp	6	5-20R	9' cord w/NEMA 5-20P Plug	circuit breaker only	E	No	1,3
	20 Amp	PD-1020C-NS	PD	40"	20 Amp	10	5-20R	9' cord w/NEMA 5-20P Plug	circuit breaker only	J	No	1,3
		PD-1220C-NS	PD	57"	20 Amp	12	5-20R	9' cord w/NEMA 5-20P Plug	circuit breaker only	N	No	1, 3
ıs	30	PD-2X1215TL-30CB	PD	56-1/2"	30 Amp	24	5-15R	9' cord w/NEMA L5-30P Plug	circuit breaker only	N	No	5,6









used in 15 Amp models







used in 15 Amp circuits





**NEMA 5-20P** used in 20 Amp circuits used in 20 Amp circuits

