

SL-2000 SERIES DUCT SMOKE DETECTORS

Hi-Temp, Low-Flow & No-Tools

PRODUCT APPLICATION

The SL-2000 Series Conventional Duct Detector is the latest innovation for early detection of smoke and products of combustion present in air moving through HVAC ducts in Commercial, Industrial, and Residential applications. The unit is designed to prevent the recirculation or spread of smoke by air handling systems, fans and blowers. Complete systems may be shut down in the event of smoke detection. The SL-2000 is

t Dis

designed and built to meet all local code requirements, as well as the NFPA

and ICC standards regarding HVAC supply and return duct smoke detectors. Output terminals are provided for a wide range of remote accessories such as horns, strobes, remote status indicators, and test/reset key switches or push buttons.

PRODUCT DESCRIPTION

The SL-2000 includes many features that represent true innovations from current generation duct smoke detectors. Our traditional installer/servicer-friendly approach has been closely followed and expanded throughout the SL-2000. This philosophy provides a new level of efficiency in after-purchase value to both the installer/servicer and end-user. Our attention to detail has yielded a host of "No-Tools Required" features, as well as a multi-application performance level as yet unmatched in the industry. Innovative product combined with unsurpassed customer







MEA ACCEPTED

service equals the right combination for all of your projects. The key features below detail many of the customer-driven innovations incorporated in the SL-2000 Series.

FEATURES

- Low-Flow Technology: Both Ionization and Photoelectric models listed for velocities between 100-4000 ft./min
- Both models listed for high-temperature applications
- Operating voltages: 230VAC, 115VAC, 24VAC, 24VDC
- Interconnect up to 30 units for common functions
- Patented "No-Tools Required" front or rear loading and removing sampling/exhaust tubes
- Patented "Test Port Valve" allows for aerosol smoke testing without cover removal
- Clear cover fitted with four captive "No-Tools Required" thumbscrews
- Instantaneous cover removal trouble indication
- Staggered terminal blocks for easier wiring
- Flashing LED on detector head indicates normal operation
- Magnet test capability (magnet included)
- More wiring space than competitive models
- Footprint allows easy retrofit in many applications without additional drilling
- Over 15 remote accessories available
- Duct wall gaskets on back of enclosure are pre-installed
- Compatible with the WP-2000 weatherproof enclosure


Air Products and Controls is a Brand of Apollo America 25 Corporate Drive Auburn Hills, MI 48326 (248) 332-3900 Phone (888) 332-2241 Toll free (248) 332-8807 Fax www.ap-c.com



- Reset switch is also an alarm test switch competitive models require a magnet or cover removal to test at unit
- Unit includes green pilot and red alarm visual indicators
- External mounting tabs do not require cover removal to install
- Colored cover gasket indicates proper cover seal
- UL, CUL, CSFM, and MEA Listed
- Compact, lightweight size means easy handling, lower shipping costs
- Two sets of IOA form "C" alarm contacts
- One set of 2A form "A" alarm contacts
- One set of IOA form "C" trouble contacts
- Large terminal connection screws
- Standard interchangeable "plug-in" UL268 photoelectric or ionization heads
- Advanced detector head design yields internal dust filtering
- No additional screens or filters to clean
- Compatible with building automation and fire alarm systems
- lonization and Photoelectric versions available
- Complete wiring details permanently attached to unit

Dist	ribu	ted	Bv:
2100	120	CG	– y .

WIRING

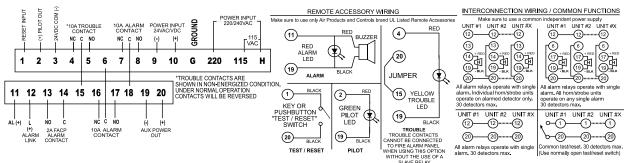

		, n	111	-	SP			A T		NIC
_	RL	JU	U		ЭP	EL		-	w	142

PRODUCT SPECIFICATIONS	<u></u>			
MODEL NUMBER:	SL-2000-N	Ionization: 230VAC, 115VAC, 24VAC, 24VDC		
	SL-2000-P	Photoelectric: 230VAC, 115VAC, 24VAC, 24VDC		
DETECTOR MODEL NUMBER:	SL-2000-N	55000-225APO		
	SL-2000-P	55000-328APO		
SAMPLING TUBES:	FAST Tube	Sectional sampling tube, kit fits up to 90" duct width		
	STN-1.0	Sampling tube for 12" or less duct width		
	STN-2.5	Sampling tube for 6" to 2.5' duct width		
	STN-5.0	Sampling tube for 2.5' to 5.0' duct width		
	STN-10.0	Sampling tube for 5.0' to 10.0' duct width		
ACCESSORIES:	MS- and MSR-Series remote accessories, WP-2000 weatherproof			
	enclosure, TG-2000 aerosol test gas, and T-PB power supplies			
	(All available	from Apollo America)		
POWER REQUIREMENTS: (without accessories)	230VAC	12 mA		
Standby:	115VAC	22 mA		
	24VAC	55 mA		
	24VDC	14 mA		
Alarm:	230VAC	18 mA		
	115VAC	32 mA		
	24VAC	190 mA		
	24VDC	68 mA		
RELAY CONTACT RATING:				
Alarm Contacts:	Resistive load: 2 sets form "C" rated at 10 Amps @ 115VAC			
	Resistive load	d: 1 set form "A" rated at 2 Amps		
Trouble Contacts:	Resistive load	d: 1 set form "C" rated at 10 Amps @ 115VAC		
AIR VELOCITY:	100 to 4,000 ft./min.			
AMBIENT TEMPERATURE:	SL-2000-N	32°F to 158°F (0°C to 70°C)		
	SL-2000-P	32°F to 140°F (0°C to 60°C)		
HUMIDITY:	85 ±5 % RH	(@32 ±2°C; 86 ±3.6°F) Non-Condensing / Non-Freezing		
WIRING:	Solid or stran	ded: #12 to #22 AWG terminals		
APPROVALS:	UL & CUL Lis	sted (UL268A, UROX, UROX7) File # S2829		
	CSFM Listed (3240-1004:105)			
	MEA Accepted (73-92-E; VOL. 27)			
MATERIAL:	Grey plastic backbox, clear plastic cover (Makrolon 94V-0)			
DIMENSIONS:	13 ½" L x 4 ½" W x 2 ¼" H			
MAX. NET WT.:	2 ½ lbs.			
RADIOACTIVE ELEMENT:	For SL-2000 -	-N (Ionization) Americium 241; 0.9 Micro-Curie		
		se to corrosive atmospheres		
HARDWARE:	7" exhaust tu	be, sampling tube end cap, mounting template, test		
		mounting hardware included		
		-		

ENGINEERS & ARCHITECTS SPECIFICATIONS

- Air duct smoke detectors shall be Air Products and Controls SL-2000 Series. For ionization detectors the model number is SL-2000-N.
- For photoelectric detectors the model number is SL-2000-P. The detectors shall be listed by Underwriters Laboratories per UL 268A.
- The detectors shall operate at air velocities from 100 feet per minute to 4,000 feet per minute and at temperatures of no greater than 140°F (60°C).
- Visual indication of alarm and power must be provided on the detector front.
- A manual reset switch shall be located on front of the device.
- · Detector head shall not require additional filters or screens which must be maintained, and shall include both a standby and alarm visual indication.
- The housing shall contain a detector base which will accept photoelectric or ionization detector heads.
- Terminal connections shall be of the screw type, a minimum of #6 screw (#12 to #22 AWG compatible). Terminals shall be provided for remote
 pilot, remote alarm indications, strobe/horn, and remote test/reset switch. All wiring must comply with local codes and regulations.
- A method of testing the alarm function with a magnet must be provided.
- · A method of smoke testing the detector without removing the cover must be provided.
- · All unit, remote accessory, and common function connection designations must be permanently affixed to the unit.
- Cover and sampling/exhaust tube installation or removal must not require the use of tools.
- Capability for interconnection of up to 30 units shall be provided for common functions.
- · Sample and exhaust tubes shall be capable of removal/installation from the front and/or rear of the detector for inspection/maintenance.

NOTICE: The information contained in this document is intended only as a summary and is subject to change without notice. The products described have specific instructional/installation documentation, which covers various technical, approval, code, limitation and liability information. Copies of this documentation along with any general product varning and limitation documents, which also contain important information, are provided with the product and are also available from Apollo America The information contained in all of these documents should be considered before specifying or using the products. Any example applications shown are subject to the most current enforced local/national codes, standards, approvals, certifications, and/or the authority having jurisdiction. All of these resources, as well as the specific manufacturer of any shown or mentioned related equipment, should be consulted prior to any implementation. For further information or assistance concerning the products, contact Apollo America. Apollo America reserves the right to change any and all documentation without notice.