

WIRELESS MULTI-ROOM SOUND SYSTEM



HEOS Drive

**NETWORKED MULTI-ROOM AMPLIFIER:
WHOLE HOME AUDIO IN A SINGLE CHASSIS.**

The evolution continues with the HEOS Drive, a network multi-room amplifier. The powerful 4-zone, 8-channel multi-room amplifier covers all HEOS zones with a single 2U tall, rack mountable chassis—ideal for custom installers.


MULTI-ROOM

Every room deserves its own HEOS.



APPS & STREAMING SERVICES

Tap the App and start rockin'.



SOUND QUALITY

HEOS sound is a Denon legacy.




EASY INSTALLATION

Save Time. Save Space.



THE HEOS APP.

A SIMPLE, EASY TO USE INTERFACE

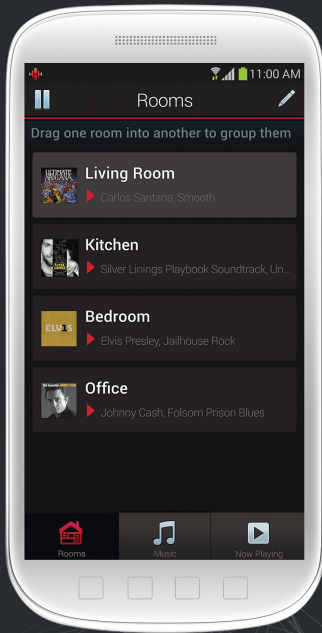


Stream from your favorite online music services, or listen to tracks directly from your phone, tablet or USB drives. With HEOS, you have all the options you need and all the access you want.



ROOMS: Name each HEOS player according to the room where it is located. Group rooms together to play the same song in party mode. Separate rooms to play a different song in each of them.

NOW PLAYING: Instantly control what is playing in every room, view cover art or check the queue for what is coming up next. Create and save playlists.

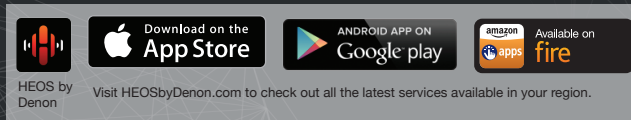

*Availability of music services may vary by region. Not all services may be available at time of purchase. Some services may be added or discontinued from time to time based on decisions of the music service providers or others. Visit www.HEOSbyDenon.com for announcements and details.

KEY FEATURES:

Designed by custom integration specialists for custom integration professionals, HEOS Drive is a unique 4 zone whole home audio distribution system with 8 channels of Class D amplification, all in a single 2U tall chassis that features both Dolby Digital and Dolby Digital+ decoding with stereo downmixing.

Rated at 60 watts per channel into each of the 8 channels (20Hz-20kHz, .05% THD, 8 ohms, All Channels Driven), 1 or 2 stereo amp pairs can be bridged for single channel high power output (130 watts), and the HEOS Drive features low impedance drive capability (4 ohms).

- Whole home amplified multi-zone audio (4 HEOS zones)
- 8 Channels Class D digital amplification; 60 wpc 8 ohms; 4 ohms compatible; bridge mode
- Pre-amp outputs for each zone
- Dual RJ-45 Ethernet LAN ports
- Stereo/Mono selectable output
- Only 2U high; removable rack ears included
- 3rd Party Controllable
- Dolby Digital/Dolby Digital+ downmixing to stereo



TECHNICAL SPECIFICATIONS

AUDIO SYSTEM

Class D Digital Amplification: 8 x 60 (20Hz-20kHz, .05% THD) watts of Class D digital amplification provide high efficiency, lowest distortion and widest dynamic range.

Auxiliary Analog Line Input: The 4 stereo analog auxiliary line input lets users connect devices with analog stereo outputs directly to the HEOS Drive.

4 Digital Inputs: The 2 optical and 2 coaxial line inputs lets users connect devices with an optical or coaxial digital output directly to the HEOS Drive.

Subwoofer Pre-out: Connect up to 4 powered subwoofers to the HEOS Drive for additional bass.

MUSIC SOURCES

Music Services Supported:

The HEOS app lets you choose from popular subscription streaming services including Rhapsody, Pandora, Tidal, iHeartRadio, SiriusXM, Spotify, SoundCloud, Rdio, and TuneIn. More services will be added soon.*

Music Stored On Phone/Tablet: iTunes music stored locally on your iOS device, music files on your Android or Kindle Fire™ device.

USB Storage: HEOS Drive supports USB hard disc drives via the 4 USB ports. Music content on a USB drive can be played back locally, or on any or all HEOS players on the network.

Music Downloads: DRM-free downloads from any service**

Internet Radio Supported: Streaming MP3, AAC and WMA

Album Art Supported: JPG, PNG, BMP and GIF picture formats

Audio Formats Supported: HEOS Drive supports MP3 and WMA music files, as well as AAC (MPEG4) and FLAC (lossless) file types, along with WAV files from compatible music servers.

*Subject to availability in your area

**Subject to audio format support

NETWORKING

Wired Connectivity: Dual RJ-45 jack for connection to wired Ethernet

MATRIX SWITCHING

Multiple Analog and Digital Inputs:

- 4 stereo analog
- 2 optical digital
- 2 coaxial digital inputs

GENERAL

Power Supply: 100-240 Volts AC, 50-60 Hz auto-switching

Weight: 15.9 lbs; 7.2 kg

Operating Temperature: 41°F-95°F; 5°C-35°C

Package Contents:

- HEOS Drive
- AC power cord
- Ethernet Cable
- Quick Start Guide
- 2 rack ears

Buttons and Indicators:

- Power/standby
- Ethernet status 1/2
- Zones 1-4 active status

Dimensions (H x W x D):

3.5 x 17 x 15.6 inches (without rack ears)
3.5 x 19.125 x 15.6 inches (with rack ears)
88mm x 430mm x 402 mm (without rack ears)
88mm x 483mm x 402 mm (with rack ears)

Product Finish: Black

Note: Especially as we strive to continuously improve the quality of our products, specifications are subject to change without notice. Pandora, the Pandora logo, and the Pandora trade dress are trademarks or registered trademarks of Pandora Media, Inc. Used with permission.