





TWINKLY™ PRO  
 SPEKTRUM+  
 LIGHT STRING  
 STRINGERS & REELS  
 DECORATIVE BULBS  
 ACCESSORIES  
 LINEAR LIGHTING  
 SPECIALTY LIGHTING  
 ARCHITECTURAL



### Features

- RGB+TW (2700K–6000K) and Color Changing
- Control via Spektrum+™ Smart App or Smart Switch
- Surface mount and soil mount accessories included
- Adjustable fixture head for directing light
- Perfect for outdoor wall washing or grazing effects
- Available in 3-kit starter pack and additional add-on fixtures
- Easy to install and expand
- Link up to 8 fixtures from one power supply
- cETLus Listed for wet locations

### Available CCT/Colors



### Dimmable RGB Color Selection Featuring Tunable CCT



### Listing/Ratings



## SPEKTRUM+ Landscape Light Kits

Spektrum+™ RGB+TW Landscape Lights allow you to control your outdoor evenings and set the right ambiance to your patio and outdoor landscaping. Brighten up dark paths, create highlights in your landscaping, or create a unique ambient lighting experience. With easy to install line voltage operation, achieve outdoor lighting without hassle or hiring a professional.

### Technical Information

Series	SPKPL-LDS
Input Voltage	120-277V AC
CCT	RGB+TW (2700K–6000K)
CRI	80+
Wattage	10W per fixture
Lumens	Up to 750Lm per fixture
Beam Angle	120°
Dimmable	10–100%*
Mounting	Surface mount
Rating	cETLus Listed, Wet Locations
Rated Life	25,000 hrs

\*Not intended for use with standard wall dimmer.

### Ordering Information


**SPKPL-LDS-RGBTW-3KIT-BK** 3-Fixture Kit-120-277V AC | 10W | RGB+TW | 750Lm

**SPKPL-LDS-RGBTW-1H-BK** Single Fixture-120-277V AC | 10W\* | RGB+TW | 750Lm

Single Fixture includes: (1) Surface mount bracket, (1) Soil mount stake, (1) T-connector  
 3-Kit Includes: (3) Surface mount brackets, (3) Soil mount stakes, (3) 36" IP68 SJTW AWG18#/12C Jumper Cables, (3) T-connectors, (1) IP67 outdoor rated 24V DC 96W Driver/Adapter with 100-240V input & 36" Lead + 120V Plug + 36" Tail  
 Must purchase 3-kit. Single fixtures are add-ons only



### Spektrum+™ Landscape Light Set-Up

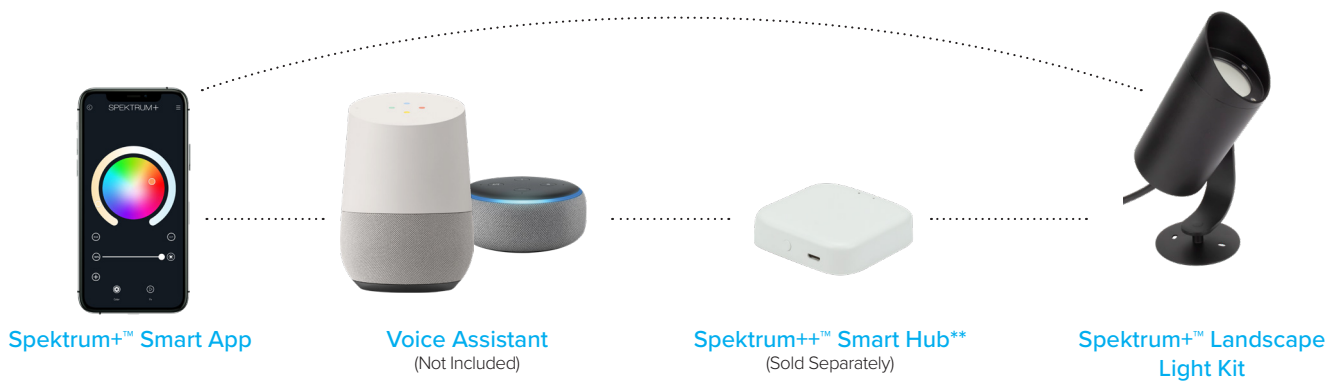

\*\*Spektrum+™ Smart Hub (SPKPL-GTWY) required for use with voice assistants



### Features

- Control multiple Spektrum+™ fixtures simultaneously: Downlights, Lamps, Smart Receivers, Landscape Lights, and more!
- Use in addition to the Spektrum+™ Smart Lighting App
- RGB, Tunable CCT, and dimming control
- Surface mount magnetic dock fits securely in decora-style wall plates
- Save a dedicated scene or favorite setting with the push of a button
- Up to 25 meter signal range\*

### SPEKTRUM+ Smart Switch

The Spektrum+™ Smart Switch is a streamlined control alternative to the Spektrum+™ Smart App. The Smart Switch features built in RGB and tunable white settings with dimming levels to set your favorite color temperature or brightness. With a magnetic dock, you can remove the switch from the wall plate and use as a hand-held remote for greater control freedom.

### Technical Information

Voltage	3V DC CR2032 Battery
Output	Bluetooth® SIG Mesh
Rating	Dry Locations

### Ordering Information

**SPKPL-CTRL-W-RGBTW** Spektrum+™ Smart Switch (Wall-plate Not Included)

### Spektrum+™ Smart Switch Set-Up



Spektrum+™ Smart App



Spektrum+™ Smart Switch



Spektrum+™ Smart Hub+  
(Sold Separately)



Spektrum+™ Smart Receiver



Spektrum+™ Downlights



Spektrum+™ Lamps

\*Signal range may vary due to signal attenuation



### Features

- Recommended for use in all Spektrum+™ installations
- Enables connectivity with voice activated assistants
- Required to set automations in Spektrum+ App
- Small and compact housing
- Spektrum+™ Smart Lighting App required for set-up\*\*
- Requires 2.4Ghz WiFi for operation
- Includes: 5V DC adapter with plug plus USB cable
- Compatible with all Spektrum+™ Smart Lighting fixtures

### SPEKTRUM+ Smart Hub

Want to utilize voice control with your Spektrum+™ Smart Lighting Products? No problem. Simply install Smart Hub into your Spektrum+™ ecosystem and sync your Amazon Alexa or Google Device for a quick and easy voice command lighting.

### Technical Information

Voltage	5V DC 1A
Frequency	2.4 GHz
Transit Power	WiFi 21dBm   Bluetooth® 7dBm
Rating	FCC Compliant, IP20, Dry Locations

\*\*Smart Hub is not compatible with other third party controls

### Ordering Information

<b>SPKPL-GTWY</b>	WiFi to Bluetooth® Gateway
-------------------	----------------------------

SPKPL-GTWY includes: USB cable and power adapter

### Spektrum+™ Smart Hub Set-Up



Spektrum+™ Smart App



Voice Assistant  
(Not Included)



Spektrum+™ Smart Hub+  
(Sold Separately)



Spektrum+™ Smart Lights

\*Spektrum+™ Smart Hub (SPKPL-GTWY) required for use with voice assistants



## SPEKTRUM+ 120V AC Outdoor Outlet Plug

The Spektrum+ outdoor outlet plug is perfect for outdoor lighting that requires a 120V AC receptacle. Remotely set timers, schedules, countdowns, shared control, or scene setting through the Spektrum+ Smart App for added features to existing outdoor lighting. With two receptacles, 15A capacity, and an IP44 outdoor rating, this outdoor outlet plug is the perfect addition to a Spektrum+ Smart Home.

### FEATURES

- 125V, 15A/1875W output with 2x receptacles
- 100-250V 50/60Hz input
- 15cm cable length
- IP44 outdoor rating
- Control via Spektrum+™ App
- ETL Listed, FCC Compliant

### LISTINGS & RATINGS:



### 120V AC OUTDOOR OUTLET PLUG ORDERING INFORMATION

ITEM NUMBER	DESCRIPTION
SPKPL-ODOP-120V-15A	120V AC 15A Outdoor Outlet Plug w/2 receptacles

### 120V AC OUTDOOR OUTLET PLUG ACCESSORIES

ITEM NUMBER	DESCRIPTION
SPKPL-GTWY	Spektrum+™ Smart Hub (Recommended for all installations)

(\*Gateway recommended for use in every Spektrum+ application for full app functionality)



Spektrum+ Smart Lighting App



Spektrum+ Smart Hub\* (Sold Separately)



Voice Assistant (Not Included)



120V AC Outdoor Outlet Plug

TWINKLY™ PRO  
SPEKTRUM+  
LIGHT STRING  
STRINGERS & REELS  
DECORATIVE BULBS  
ACCESSORIES  
LINEAR LIGHTING  
SPECIALTY LIGHTING  
ARCHITECTURAL