


DIPS Fittings Fabricated 45° Ell-Three Segment

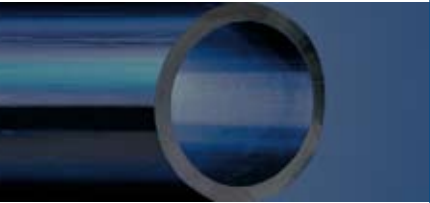

DIPS  
HDPE  
Fittings


Pressure Rating is based on miter angle, pipe DR (Wall thickness), and resin properties.

Ratings based on 3608 resin/11.25 angle:	
DR	Pressure Rating
7	219 psi
9	160 psi
11	128 psi
13.5	100 psi
15.5	82 psi
17	73 psi
21	57 psi
26	44 psi
32.5	34 psi

Ratings based on 4710 resin/11.25 angle:	
DR	Pressure Rating
7	274 psi
9	202 psi
11	161 psi
13.5	126 psi
15.5	103 psi
17	92 psi
21	72 psi
26	55 psi
32.5	42 psi

Note: Size/DR listings shown are commonly requested. Many DR options not listed are available. Please consult an ISCO representative for availability.

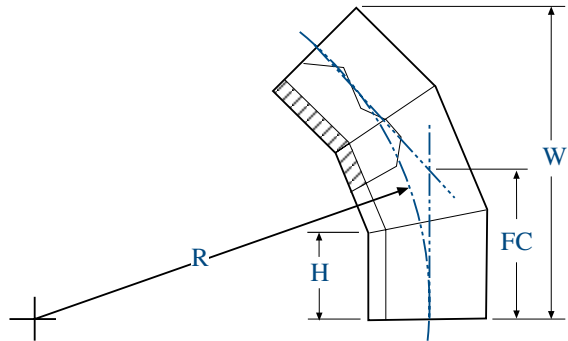

DIPS Fittings 45° Ell-Three Segment										
Nominal Size (in)	Pipe OD (in)	DR	Part #	Dimensions			Weight (lbs)	Shipping Method		
				R (in)	H (in)	FC (in)			W (in)	
4	4.8	11	ISFF450411DIPS	14.33	7	10.56	19.73	5	FedEx	
		17	ISFF450417DIPS	"	"	"	"	3	"	
6	6.9	11	ISFF450611DIPS	20.61	8	13.12	24.84	12	FedEx	
		17	ISFF450617DIPS	"	"	"	"	8	"	
8	9.05	11	ISFF450811DIPS	22.62	8	13.77	26.71	21	FedEx	
		17	ISFF450817DIPS	"	"	"	"	14	"	
10	11.1	11	ISFF451011DIPS	22.62	8	13.97	27.78	32	FedEx	
		17	ISFF451017DIPS	"	"	"	"	22	"	
12	13.2	11	ISFF451211DIPS	26.39	10	17.00	33.68	56	FedEx	
		17	ISFF451217DIPS	"	"	"	"	38	"	
14	15.3	11	ISFF451411DIPS	26.39	12	19.43	38.58	86	FedEx	
		17	ISFF451417DIPS	"	"	"	"	58	"	
16	17.4	11	ISFF451611DIPS	34.94	12	21.25	42.43	121	LTL	
		17	ISFF451617DIPS	"	"	"	"	82	"	
18	19.5	11	ISFF451811DIPS	38.96	12	22.33	45.00	160	LTL	
		17	ISFF451817DIPS	"	"	"	"	108	"	
20	21.6	11	ISFF452011DIPS	43.23	13	24.46	49.39	215	LTL	
		17	ISFF452017DIPS	"	"	"	"	145	"	
24	25.8	11	ISFF452411DIPS	51.53	13	26.66	54.63	335	LTL	
		17	ISFF452417DIPS	"	"	"	"	225	"	
30	32	17	ISFF453017DIPS	54.63	13	27.94	59.03	363	LTL	



1-800-345-ISCO  
www.isco-pipe.com