




ATLONA High Speed HDMI OVER SINGLE CAT5/6/7 EXTENDER KIT WITH BI-DIRECTIONAL IR and RS232 (1080p @ 48bit up to 330ft) AT-HD4-100SR

Weight : 5.03 lbs
SKU # AT-HD4-100SR

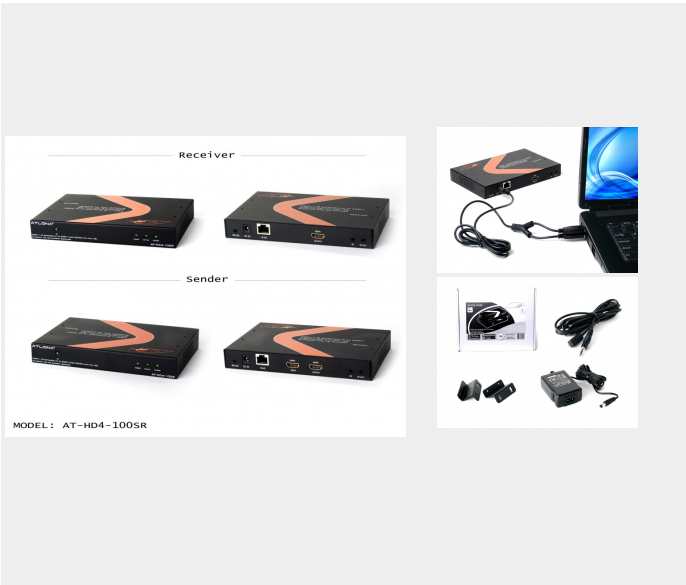

INPUTS:

- 1 x HDMI (Type A) on the Sender
- 1 x IR on the Sender
- 1 x IR extension on the Receiver
- 1 x RS232 on the Sender
- 1 x RJ45 on the Receiver

OUTPUTS:

- 1 x HDMI (Type A) on the Receiver
- 1 x HDMI Local out (Type A) on the Receiver
- 1 x IR on the Receiver
- 1 x IR extension on the Sender
- 1 x RS232 on the Receiver
- 1 x RJ45 on the Sender

FEATURES:

- Built with the Valence chip set and HDBaseT the HD4-100SR is at forefront of HDMI extension technology
- Ideal for whole house a/v, video broadcasting, remote monitoring, presentations and educational facilities transmission, perfect for Control4, RTI, HAI users as this ability allows sending IR to the remote locations from the control systems and from the remote locations to the control systems
- Supports RS232 pass-through, perfect for integrating a 3rd party control system.
- Wall Mountable, mounting ears are included.
- Easy to install, simple to operate and the most effective solution for long signal extension.
- Transmits HDMI 1.4, RS232 and Bi-Directional IR up to 330ft

SPECIFICATIONS:

- HDCP/EDID Compliant: DVI 1.0 and HDCP 1.2 compliant
- Resolution Support: up to 2k (2048x1080p) and 4k (4096x2160p), 4 times higher than 1080p
- Audio: Dolby TrueHD & DTS Master Audio 7.1 compliant
- Full HD and 3D support - all 7 3D formats are supported
- Deep Color: 48bit up to 330ft
- Video Bandwidth: 10Gbps
- Input TMDS signal: 1.2 volts (peak-to-peak)
- Input DDC signal: 5 volts (peak-to-peak)
- HDMI Connector: 19 pin type female connector
- Power Supply: 5V 2A (110/240 universal)
- Link Connector: RJ-45 Shielded

PACKAGE CONTENTS:

- 1 x Transmitter
- 1 x Receiver
- 2 x IR Cables
- 2 x Power Supplies (5v)

WARRANTY:

CONNECTION DIAGRAM:

