

EHD930

720p Analog HD True Day/Night
Outdoor IR Vandal Dome Camera


eZ.HD



Features

- 720P with high flexibility and performance for astounding image
- 1/2.8" Sony 1.37M pixels COMS, delivers amazing high sensitivity
- Varifocal 2.8~12mm DC iris lens to capture the desired field of view
- 30 IR LEDs for 30m/100 ft. range (depending on scene IR reflectivity)
- D-WDR to improve the visibility under high contrast scene
- Provides 3D-Noise Reduction ensures less blurry moving subjects, vivid and high SN ratio images even under low light environments
- Support 720p & 960H Analog signal output, which can be easily switched by OSD
- The flexible angle viewing with its 3 Axis rotation design allows wall or ceiling mounting
- Convenient speedy-mount base plate easily attaches to surface, camera attaches to plate with machine screws

Dimensions

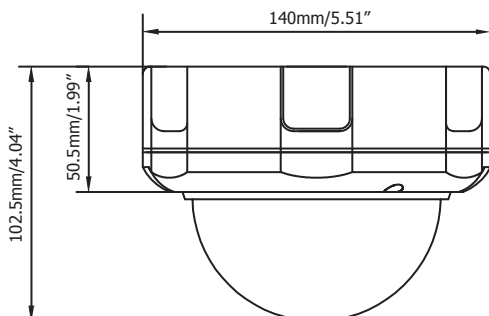

NEW



Specifications

Part number	EHD930
Pickup Device	1/2.8" Sony 1.37M pixels COMS
Video Format	NTSC/PAL (can be switched via OSD)
Effective Pixels	1280 (H) x 720 (V)
Scanning System	Progressive Scan
Sensitivity	0 Lux With IR On
S/N Ratio	Over 48dB (AGC off)
Electronic Shutter	Auto/Manual (x30~1/50,000) / Flk
Video Output	BNC 1.0Vp-p 75Ω
Gamma Correction	0.45
Lens Type	2.8mm-12mm DC Iris with ICR
BLC	OFF/BLC/HS BLC Selectable
AGC	0~15 Levels
White Balance	ATW/AWC-SET/Indoor/Outdoor/Manual/AWB
Sync Mode	Internal
Day/Night	Ext, Auto, Color, B/W
IR LED	30 Units
IR Distance	Up to 30m/100ft.(depending on scene IR reflectivity)
OSD Languages	12-Languages
DNR	2DNR/3DNR, OFF
DEFOG	Off/Auto(Under B/W Mode)
D-WDR	On/Off
Sens-UP	On/Off(x30~x2)
Mirror	Off/Mirror/V-Flip/Rotate
Motion Detection	Off/On for 4 selectable zones
Privacy Mask	Off/On for 4 selectable zones
Environmental	IP66 Weather Resistant
Power Source	12VDC/24VAC
Power Consumption	12VDC:9W / 24VAC:15W
Operating Temperature	-40°C~55°C / -40°F~131°F
Humidity	Less than 80%
Dimensions	140 x 102.5mm / 5.51" x4.04"
Weight	1020g / 2.25lbs
Certifications	CE, FCC, RoHS

* All product specifications are subject to change without notice
 * Models vary in different countries. Please visit EverFocus regional websites for detailed ordering information
 * Lens models and availability vary in different regions