
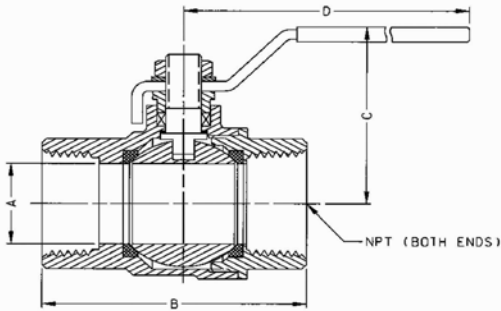



# BALL VALVES

## Forged Brass Economy Valves

### 94A SERIES

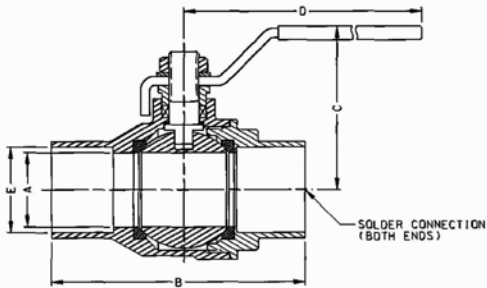

### 94A OPTIONS

Size	Replacement Handles	2-1/4" Stem Extension + Memory Stop
1/4"-3/8"	W932400	78217101
1/2"	W932500	78217201
3/4"	W936000	78217301
1"	W932600	78217401
1-1/4"	W932700	78217501
1-1/2"-2"	W932800	78217601
2-1/2"-3"	W932900	78217701
4"	W933000	78217801 

- Kits do not include stem nut

- Replacement handles are not UL marked

### APOLLO INTERNATIONAL™ ECONOMY FULL PORT BALL VALVES

These full port ball valves with forged brass body are UL listed and CSA approved.

#### FEATURES

- Adjustable stem packing nut
- Meets MSS SP110 requirements
- 600 CWP non-shock (1/4" - 2")
- 400 CWP non-shock (2-1/2" - 4")
- 2-1/4" memory stop option
- 100% Factory Tested
- **Lead Free** option (94ALF-A)

#### APPROVALS

**CSA listed** (File # 226234) per the following standards:

- CAN 1-9.1 1/2 psig
- CGA 3.16 125 psig
- CGA CR91-002 5 psig
- ANSI Z21.15 1/2 psig
- ASME B16.44 5 psig
- ANSI/ASME B16.33 125 psig



#### UL listed

- Guides YQNZ, YRBX, YRPV, YSDT and MHKZ (1/4" - 4" NPT only)
- UL 258 - VQGU Trim & Drain 175# max (1/4" - 2")



#### FM 1140

\* Gas approvals apply to NPT models only



Model Number	Size (in.)	Dimensions (in.)					Wt.
		A	B	C	D	E	
<b>NPT</b>							
94A-101-01	1/4"	0.395	1.746	1.840	3.543	-	0.33
94A-102-01	3/8"	0.407	1.756	1.840	3.543	-	0.30
94A-103-01	1/2"	0.583	2.047	1.921	3.543	-	0.44
94A-104-01	3/4"	0.748	2.362	2.087	3.780	-	0.66
94A-105-01	1"	0.945	2.756	2.559	4.528	-	1.10
94A-106-01	1-1/4"	1.260	3.307	2.953	4.528	-	1.57
94A-107-01	1-1/2"	1.575	3.661	3.346	5.512	-	2.40
94A-108-01	2"	1.969	4.181	3.681	5.512	-	3.37
94A-109-01	2-1/2"	2.520	5.378	4.764	8.661	-	7.60
94A-100-01	3"	2.953	6.039	5.079	8.661	-	9.36
94A-10A-01	4"	3.898	7.386	5.866	9.606	-	16.85
<b>Solder</b>							
94A-203-01	1/2"	0.583	2.047	1.839	3.543	0.630	0.38
94A-204-01	3/4"	0.748	2.748	1.996	3.780	0.878	0.64
94A-205-01	1"	0.945	3.228	2.441	4.528	1.130	0.99
94A-206-01	1-1/4"	1.260	3.819	2.854	4.528	1.378	1.40
94A-207-01	1-1/2"	1.575	4.425	3.169	5.512	1.630	2.17
94A-208-01	2"	1.969	5.315	3.449	5.512	2.130	2.97
94A-209-01	2-1/2"	2.520	6.283	4.764	8.661	2.630	6.36
94A-200-01	3"	2.953	7.150	5.079	8.661	3.130	8.32
94A-20A-01	4"	3.945	9.276	5.866	9.606	4.130	15.78



For additional information, submittal sheets and manuals, visit [www.apollovalves.com](http://www.apollovalves.com)

Customer Service (704) 841-6000