

B3210X - Linked Eye Rods (Right-hand threads-both ends)

B3210XL - Linked Eye Rods (Left & right threads)

B3211X - Linked Welded Eye Rods (Right-hand threads-both ends)

B3211XL - Linked Welded Eye Rods (Left & right threads)

Size Range: 3/8"-16 thru 7/8"-9 rod


Material: Steel

Function: Designed for use in a hanger assembly where universal movement is necessary. The welded eye rods allow for heavier loads.

Approvals: Conforms to the requirements of NFPA13.

Finish: Plain. Contact customer service for alternative finishes and materials.

Order By: Figure number, rod size, length, and finish.

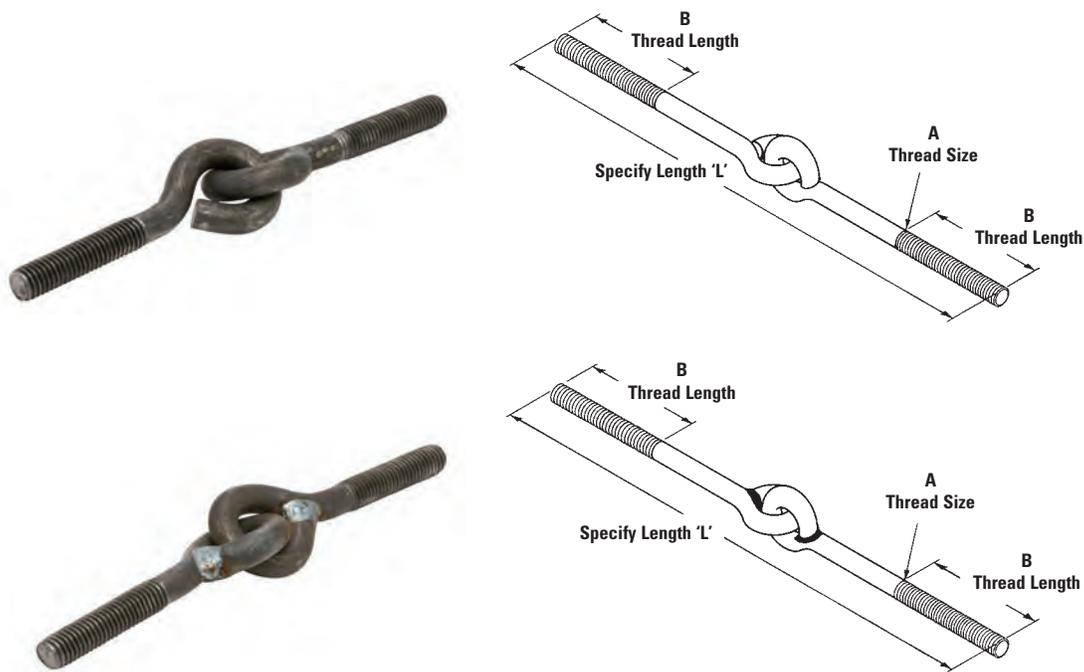

Part No.	Thread Size A	Thread Length B in. (mm)	Eye I.D. in. (mm)	Design Load			
				B3210 650°F (343°C) Lbs. (kN)	650°F (343°C) Lbs. (kN)	B3211 750°F (399°C) Lbs. (kN)	
B3210X-3/8 x 'L'	B3211X-3/8 x 'L'	3/8"-16	2 1/2" (63.5)	1/2" (12.7)	240 (1.07)	730 (3.25)	572 (2.54)
B3210X-1/2 x 'L'	B3211X-1/2 x 'L'	1/2"-13	2 1/2" (63.5)	5/8" (15.9)	440 (1.96)	1350 (6.00)	1057 (4.70)
B3210X-5/8 x 'L'	B3211X-5/8 x 'L'	5/8"-11	2 1/2" (63.5)	3/4" (19.0)	705 (3.13)	2160 (9.61)	1692 (7.52)
B3210X-3/4 x 'L'	B3211X-3/4 x 'L'	3/4"-10	3" (76.2)	7/8" (22.2)	1050 (4.67)	3230 (14.37)	2530 (11.25)
B3210X-7/8 x 'L'	B3211X-7/8 x 'L'	7/8"-9	3 1/2" (88.9)	1" (25.4)	1470 (6.54)	4480 (19.93)	3508 (15.60)

For larger sizes consult full line pipe hanger catalog.

All dimensions in charts and on drawings are in inches. Dimensions shown in parentheses are in millimeters unless otherwise specified.