


DATA SHEET

Great Lakes Textiles Vinaflex (FF) Noise Barrier is a flexible, mass loaded vinyl barrier faced with a scrim reinforced aluminum foil on one side. Vinaflex (FF) is used for wrapping noisy pipes, ducts and valves in a wide variety of applications.

Vinaflex (FF) may be combined with a quilted fiberglass decoupler to improve acoustical performance, thermal conductivity and lower installation costs. The durable reinforced foil facing serves as a protective jacket and readily accepts matching lag tape.

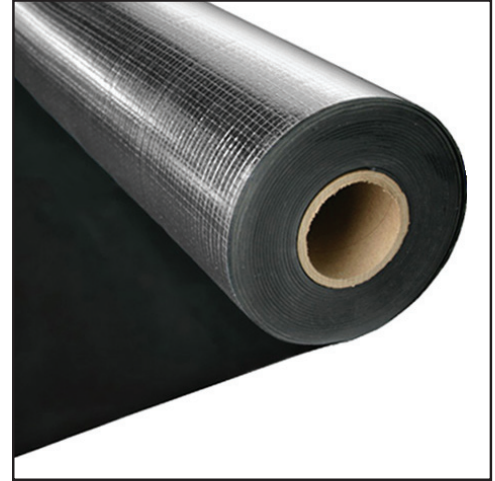

Specification and technical Information:

Standard Roll Size by Density	FF-100, (1 lb/sq.ft.) 48" x 50'
Fire Rating	Class A per ASTM E-84

Acoustical Properties:

Hz	125	250	500	1000	2000	4000	STC
dB	16	17	22	27	31	36	26

For more information on GLT Products, please call toll-free at 800.874.1748 or online at www.gltproducts.com.



Innovative Insulation Systems

HEADQUARTERS:

6810 Cochran Road | Solon, OH 44139 | 440.914.1122 | 440.914.1133 Fax | **1.800.874.1748**

DISTRIBUTION CENTERS:

Ohio: 6810 Cochran Road | Solon, OH 44139 | 440.914.1122

North Carolina: 501 West Camel Street | Greensboro, NC 27401 | 1.800.551.9760

California: 4283 Pock Lane #200 | Stockton, CA 95206 | 1.800.833.4500

Texas: 8905 Market Street | Houston, TX 77029 | 1.800.874.1748