

# Coaxial Products

PermaSeal-I™ Connectors • PermaSeal-II™ Connectors • F Crimp Connectors • F TaperSeal™ Connectors



F PermaSeal-I™ Connectors  
A3



RCA PermaSeal-I™ Connectors  
A3



BNC PermaSeal-I™ Connectors  
A3



F PermaSeal-II™ Connectors  
A4



PermaSeal-II™ Connectors  
A4



F TaperSeal™ Connectors  
A5



BNC Series Connectors  
A7



BNC Series Adapters  
A7



UHF Series Connectors  
A8



UHF Series Adapters  
A8



Mini-UHF Series Connectors  
A8




Mini-UHF Series Adapters  
A8



Coaxial CCTV-Cam Cable  
A11



Series-6 Coaxial Drop Cable  
A12



Certified Coaxial Drop Cable  
A12



Compression Termination Tools  
A13



Crimp Termination Tools  
A14



Economy Crimp Tool  
A14

# Coaxial Products

F Series Adapters • RCA Coaxial Connectors • Mini-UHF Series Connectors • N Series Adapters • Security Tools



F Crimp Connectors  
A5



F Series Connectors  
A5



F Series Adapters  
A6



F Series Premium Adapters  
A6



RCA Coaxial Connectors  
A6



RCA Coaxial Adapters  
A6



N Series Connectors  
A9



N Series Adapters  
A9




SMA Series Connectors  
A10



SMA Series Adapters  
A10



Economy Bulk Coaxial Cable  
A11



Mini RG59 5-Wire Cable  
A11



Cable Preparation Tools  
A15




BNC Connector Crimp Kits  
A16



Thread Protectors  
A16



Cable Continuity Testers  
A16



Security Shields  
A16



Security Tool  
A16

# A

**QUICK - FIND**  
Guide to Product

# Coaxial Products

## F PermaSeal-I™ Connectors

Commercial Grade F Compression Connectors  
 Suitable for Coaxial Broadband Networks Used in  
 Video, Data and Telephony Applications with  
 Standard, Tri-Shield or Quad-Shield Cable  
 360° Radial Compression  
 Precision Machined Annealed-Brass Construction  
 Anti-Corrosion Nickel-Plated Finish  
 Quick-Easy Installation— ¼"-¼" Cable Preparation

- [1] [200-016](#) F RG59 PermaSeal-I™ Connector
- [1] [200-028](#) F RG6 PermaSeal-I™ Connector
- [1] [200-032](#) F RG6-Quad PermaSeal-I™ Connector

*Related Products: Cable Stripper: 204-205; Compression Tools: 204-001, 204-036*



## RCA PermaSeal-I™ Connectors

Commercial Grade RCA Compression Connectors  
 Suitable for Audio-Video Home Entertainment  
 Quick, Easy Installation on RG6 or RG59 Cable  
 Permanent 360° Connector-to-Cable Attachment  
 Constructed of Precision Machined Annealed Brass  
 Anti-Corrosion Nickel-Plated Finish  
 Connectors include six color-coded bands for flexible,  
 field-configurable cable ID during installation

- [2] [200-065](#) RCA RG59 PermaSeal-I™
- [2] [200-066](#) RCA RG6 PermaSeal-I™

Color Bands **BK** **BL** **GR** **RD** **WH** **YL**

*Related Products: Cable Stripper: 204-205; Compression Tool: 204-036*



## BNC PermaSeal-I™ Connectors

Commercial Grade BNC Compression Connectors  
 Suitable for Audio-Video Home Entertainment  
 Quick, Easy Installation on RG6 or RG59 Cable  
 Permanent 360° Connector-to-Cable Attachment  
 Constructed of Precision Machined Annealed Brass  
 Anti-Corrosion Nickel-Plated Finish  
 Connectors include six color-coded bands for flexible,  
 field-configurable cable ID during installation

- [3] [200-167](#) BNC RG6 PermaSeal-I™
- [3] [200-168](#) BNC RG59 PermaSeal-I™

Color Bands **BK** **BL** **GR** **RD** **WH** **YL**

*Related Products: Cable Stripper: 204-205; Compression Tool: 204-036*



## Coaxial Products

### F PermaSeal-II™ Connectors

Ultra-High Performance F Compression Connectors  
 Patented Single-Piece Elegant Design  
 Suitable for Coaxial Broadband Networks Used in  
 Video, Data and Telephony Applications with  
 Standard, Tri-Shield or Quad-Shield Cable  
 Internal Neoprene O-Ring Sealed – 360° Radial Seal  
 Precision Machined Annealed Brass  
 Anti-Corrosion Nickel-Plated  
 Quick-Easy Installation – 1/4"-1/4" Cable Preparation




- [4] **200-004** F RG59 PermaSeal-II™ Red Band
- [4] **200-006** F RG6 PermaSeal-II™ Yellow Band
- [4] **200-007** F RG6-Quad PermaSeal-II™ Blue Band
- [5] **200-021** F RG11 PermaSeal-II™

*Related Products: Cable Stripper: 204-205; Compression Tools: 204-001, 204-036 (Use 204-031 for 200-021)*

### PermaSeal-II™ Connectors


Premium Quality, Ultra High-Performance F, RCA and BNC Compression Connectors  
 Designed for Coaxial Video and Audio Applications  
 Quick, Easy Installation on RG6, RG6-Quad, RG59 or Mini RG59 Cable  
 Permanent 360° Connector-to-Cable Attachment  
 Constructed of Precision Machined Annealed Brass  
 Maximum Conductivity Anti-Corrosion Gold or Nickel-Plated Finish  
 Connectors include six color-coded bands for flexible, field-configurable cable ID during installation

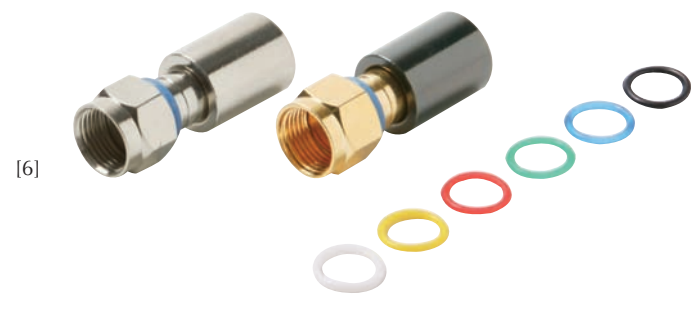

- [6] **200-080** Mini RG59 F PermaSeal-II™ – Gold
- [6] **200-003** Mini RG59 F PermaSeal-II™ – Nickel
- [7] **200-085** RG6 RCA PermaSeal-II™ – Gold
- [7] **200-067** RG6 RCA PermaSeal-II™ – Nickel
- [7] **200-083** RG59 RCA PermaSeal-II™ – Gold
- [7] **200-068** RG59 RCA PermaSeal-II™ – Nickel
- [7] **200-081** Mini RG59 RCA PermaSeal-II™ – Gold
- [7] **200-069** Mini RG59 RCA PermaSeal-II™ – Nickel
- [7] **200-087** RG6-Quad RCA PermaSeal-II™ – Gold
- [7] **200-070** RG6-Quad RCA PermaSeal-II™ – Nickel
- [8] **200-082** Mini RG59 BNC PermaSeal-II™ – Gold
- [8] **200-163** Mini RG59 BNC PermaSeal-II™ – Nickel
- [8] **200-084** RG59 BNC PermaSeal-II™ – Gold
- [8] **200-162** RG59 BNC PermaSeal-II™ – Nickel
- [8] **200-086** RG6 BNC PermaSeal-II™ – Gold
- [8] **200-161** RG6 BNC PermaSeal-II™ – Nickel
- [8] **200-088** RG6-Quad BNC PermaSeal-II™ – Gold
- [8] **200-164** RG6-Quad BNC PermaSeal-II™ – Nickel

Color Bands **BK** **BL** **GR** **RD** **WH** **YL**

*Related Products: Cable Stripper: 204-205; Compression Tools: 204-001, 204-036*

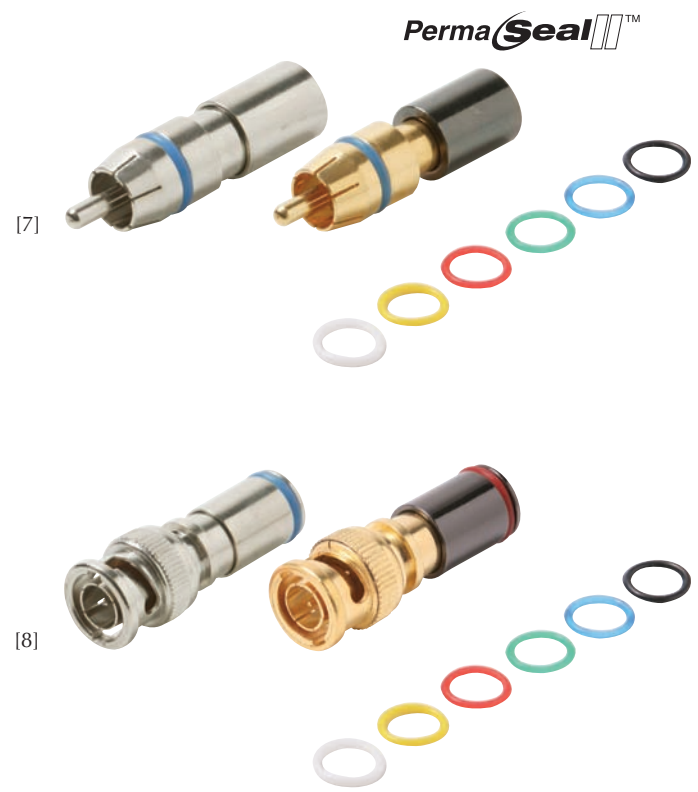

# Coaxial Products

## F TaperSeal™ Connectors

Commercial Grade Crimp Connectors  
Suitable for Coaxial Broadband Networks Used in  
Video, Data and Telephony Applications with  
Standard Shield Cable Types  
Conical Tapered Swedge Termination  
Precision Machined Annealed-Brass Construction  
Internal Neoprene O-Ring Weather Sealed  
7/16" Hex 4.3mm Wide Heavy Duty Easy-Grip Nut

- [1] **200-017** F TaperSeal™ RG59 Universal Plug  
[1] **200-029** F TaperSeal™ RG6 Universal Plug



## F Crimp Connectors

Commercial Grade F Crimp Connectors  
Suitable for Coaxial Broadband Networks Used in  
Video, Data and Telephony Applications  
Reliable easy-crimp annealed-brass construction prevents  
rupturing or cracking

- [2] **200-022** F Crimp RG11 Connector  
One-Piece Attached Crimp Ring  
Bright Acid Tin-Plated Brass  
Suitable for Use with RG11 Coaxial Cable  
[3] **200-027** F Crimp Universal RG6 Connector  
Use with standard or tri-shield cable  
Annealed Brass 3-Piece Construction  
Anti-Corrosion Nickel-Plated Finish  
[3] **200-033** F Crimp RG6-Quad Connector  
Use with quad-shield cable  
Annealed Brass 1-Piece Construction  
Anti-Corrosion Nickel-Plated Finish  
[3] **200-034** F Crimp RG6-Plenum Connector  
Use with plenum cable  
Annealed Brass 1-Piece Construction  
Anti-Corrosion Nickel-Plated Finish



## F Series Connectors

Commercial Grade F Series Connectors  
Suitable for Coaxial Networks Used in  
Video, Data and Telephony Applications


- [4] **200-015** F Plug Crimp RG6 1/4" Ring  
[5] **200-018** RG59 1/4" Ring – 100 Count Bag  
[6] **200-020** F Plug Crimp RG59 Attached Ring  
[6] **200-025** F Plug Crimp RG6 Attached Ring  
[7] **200-030** F Plug Crimp RG59 1/2" Barrel  
[8] **200-031** F Plug Crimp RG59 1/2" Barrel – Gold  
[7] **200-035** F Plug Crimp RG6 1/2" Barrel  
[8] **200-036** F Plug Crimp RG6 1/2" Barrel – Gold  
[9] **200-037** F Plug Crimp RG6 O-Ring Seal  
2-Piece Die-Cast Construction  
[10] **200-038** F Plug Crimp RG6 Weatherproof  
O-Ring Water Seal  
Silicone-Gel Compound Seal  
Precision Machined Brass  
[11] **200-039** F Plug Twist-On for RG6  
[11] **200-040** F Plug Twist-On for RG59  
[12] **200-041** F Plug Twist-On for RG59 – Gold  
[12] **200-043** F Plug Twist-On for RG6 – Gold



## Coaxial Products

### F Series Adapters

Commercial Grade F Series Adapters  
Suitable for Coaxial Networks Used in  
Video, Data and Telephony Applications

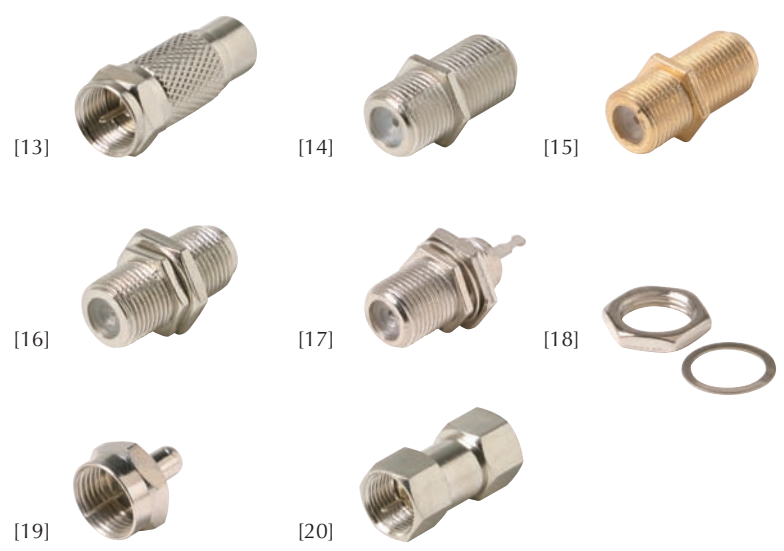

- [13] **200-045** RCA Jack to F Plug
- [14] **200-050** F Coupler Jack-Jack
- [15] **200-051** F Coupler Jack-Jack – Gold Plated
- [16] **200-053** F Coupler Jack-Jack Panel Mount with Mounting Nut and Washer
- [17] **200-055** F Jack Panel Receptacle
- [18] **200-056** 3/8" Nut-Washer for F Fittings
- [19] **200-075** F Terminator 75Ω 5% 1/2W
- [20] **200-100** F Coupler Plug-Plug
- [21] **200-103** F Jack to F-Quick Plug
- [22] **200-104** F Jack to F-Quick Plug – Gold Plated
- [23] **200-107** F Angle Adapter Jack-Plug
- [24] **200-108** BNC Jack to F Plug
- [25] **200-117** F Jack to 3.5mm Mono Plug

### F Series Premium Adapters

High-Performance F Splices and L-Adapters  
Engineered for High-Frequency Broadband Network and  
Distribution System Applications




- [26] **200-057** 1 GHz F81 Splice – 1" Long  
Red Insulator  
Return Loss -16dB minimum @ 1GHz
- [26] **200-058** 2.5 GHz F81 Splice – 1" Long  
Blue Insulator  
Return Loss -24dB minimum @ 2.5GHz
- [26] **200-059** 3 GHz F81 Splice – 1" Long  
Green Insulator  
Return Loss -30dB minimum @ 3GHz
- [27] **200-106** 2.5 GHz F Angle Adapter  
Blue Insulator  
Return Loss -20dB minimum @ 2.5GHz

### RCA Coaxial Connectors

- [28] **200-060** RCA Plug Crimp RG59 1/4" Ring
- [29] **200-063** RCA Plug Solder RG59 Premium  
Gold-Plated – Spring Strain Relief

### RCA Coaxial Adapters

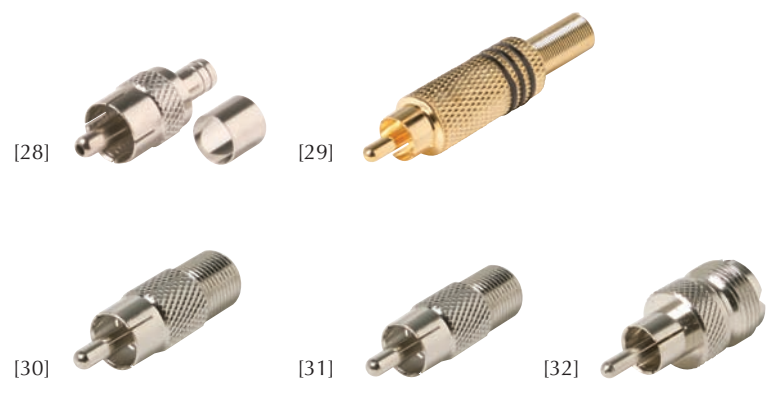

- [30] **200-110** F Jack to RCA Plug
- [31] **200-170** BNC Jack to RCA Plug
- [32] **200-196** UHF Jack to RCA Plug




# Coaxial Products

## BNC Series Connectors

Commercial Grade BNC Series Connectors  
Suitable for Video and Headend Applications


- [1] **200-122** BNC Plug Twist-On for RG6
- [2] **200-131** BNC Plug Crimp 2pc RG59
- [2] **200-134** BNC Plug Crimp 2pc RG58
- [3] **200-135** BNC Jack Crimp 2pc RG59/62
- [3] **200-136** BNC Jack Crimp 2pc RG58
- [3] **200-137** BNC Jack Crimp 2pc RG59 Plenum
- [2] **200-138** BNC Plug Crimp 2pc RG59 Plenum
- [2] **200-139** BNC Plug Crimp 2pc RG6
- [4] **200-140** BNC Plug Crimp 3pc RG59 Plenum
- [4] **200-141** BNC Plug Crimp 3pc RG6
- [1] **200-142** BNC Plug Twist-On for RG59/62
- [4] **200-143** BNC Plug Crimp 3pc RG59/62
- [5] **200-144** BNC Plug Clamp for RG59/62
- [4] **200-145** BNC Plug Crimp 3pc for RG58
- [1] **200-146** BNC Plug Twist-On for RG58
- [4] **200-147** BNC Plug Crimp 3pc RG58A/C  
Includes PVC and Plenum Ferrules
- [6] **200-148** BNC Jack Isolated Panel Mount

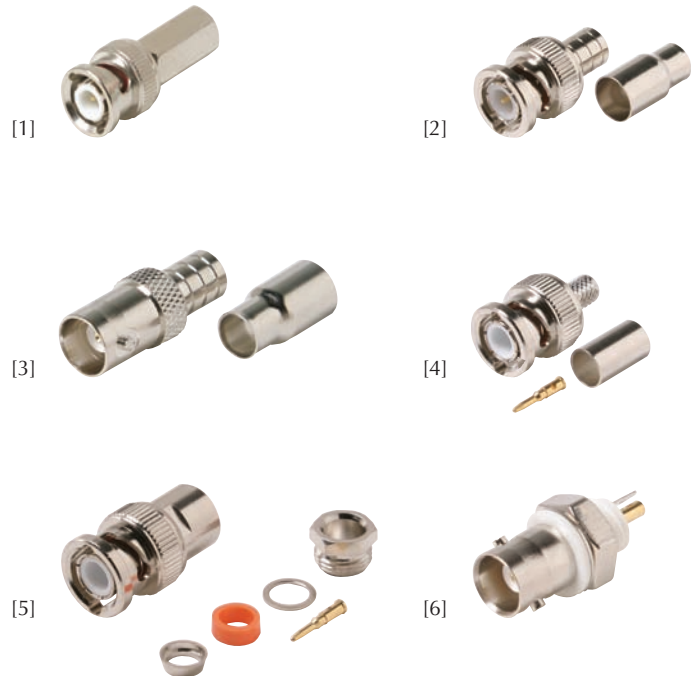

## BNC Series Adapters

Commercial Grade BNC Series Adapters  
Suitable for Video and Headend Applications

- [7] **200-130** F Jack to BNC Plug
- [8] **200-132** UHF Jack to BNC Plug
- [9] **200-133** BNC Coupler Plug-Plug
- [10] **200-150** BNC Tee Adapter Jack-Jack-Jack
- [11] **200-155** BNC Tee Adapter Jack-Plug-Jack
- [12] **200-158** BNC Angle Adapter Jack-Plug
- [13] **200-160** BNC Coupler Jack-Jack
- [14] **200-165** BNC Coupler Jack-Jack Panel
- [15] **200-173** RCA Jack to BNC Plug
- [16] **200-175** BNC Terminator 50Ω 5% ½W
- [16] **200-177** BNC Terminator 75Ω 5% ½W
- [16] **200-179** BNC Terminator 93Ω 5% ½W
- [17] **200-834** Mini-UHF Jack to BNC Plug

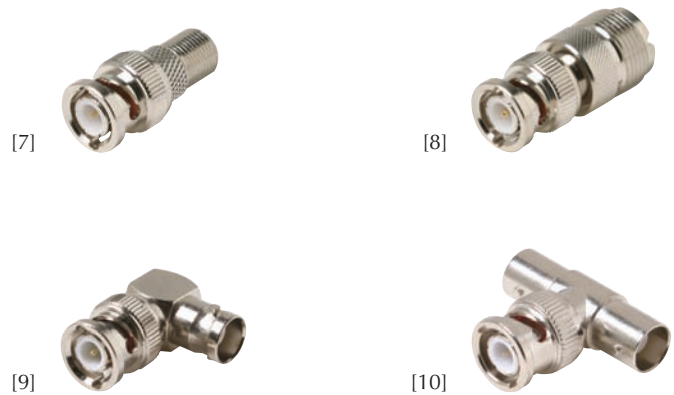

# Coaxial Products

## UHF Series Connectors

Commercial Grade UHF Series Connectors



- [18] **200-190** UHF Jack Panel Receptacle
- [19] **200-192** UHF Plug Solder-On for RG8
- [20] **200-193** UHF Plug Crimp-On for RG59

## UHF Series Adapters

Commercial Grade UHF Series Adapters



- [21] **200-189** RG59 Reducer for 200-192
- [21] **200-191** RG58 Reducer for 200-192
- [22] **200-194** F Jack to UHF Plug
- [23] **200-195** BNC Jack to UHF Plug
- [24] **200-197** UHF Angle Adapter Jack-Plug
- [25] **200-198** UHF Coupler Jack-Jack
- [26] **200-199** UHF Tee Adapter Jack-Plug-Jack
- [27] **200-836** Mini-UHF Jack to UHF Plug



## Mini-UHF Series Connectors

Commercial Grade Mini-UHF Series Connectors



- [28] **200-800** Mini-UHF Plug Crimp 2pc RG58
- [29] **200-803** Mini-UHF Plug Crimp 3pc RG58
- [29] **200-805** Mini-UHF Plug Crimp 3pc RG58 Black Anodized Body
- [30] **200-809** Mini-UHF Jack Crimp 3pc RG58
- [31] **200-813** Mini-UHF Jack Panel Receptacle



## Mini-UHF Series Adapters

Commercial Grade Mini-UHF Series Adapters



- [32] **200-820** Mini-UHF Coupler Jack-Jack
- [33] **200-822** Mini-UHF Coupler Plug-Plug
- [34] **200-824** Mini-UHF Angle Adaptor Jack-Plug
- [35] **200-826** Mini-UHF Tee Jack-Jack-Jack
- [36] **200-828** Mini-UHF Tee Jack-Plug-Jack





# Coaxial Products

## N Series Connectors

Commercial Grade N Series Connectors  
Suitable for Video and Headend Applications


- [1] **200-720** N Plug Clamp RG8A/11/213/214
- [2] **200-723** N Plug Clamp for RG58/58A
- [3] **200-726** N Jack Clamp RG8A/11/213/214
- [4] **200-729** N Jack Clamp for RG58/58A
- [5] **200-731** N Jack Panel Receptacle



## N Series Adapters

Commercial Grade N Series Adapters  
Suitable for Video and Headend Applications

- [6] **200-734** N Coupler Jack-Jack
- [7] **200-736** N Coupler Plug-Plug
- [8] **200-742** N Angle Adapter Jack-Plug
- [9] **200-746** F Jack to N Plug
- [10] **200-748** BNC Jack to N Plug
- [11] **200-750** UHF Jack to N Plug

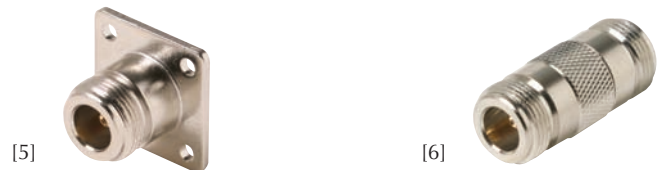

## Coaxial Products

### SMA Series Connectors

Commercial Grade SMA Series Connectors



- [12] **200-840** SMA Plug Clamp for RG58A
- [13] **200-844** SMA Plug Crimp 3pc RG58A
- [13] **200-846** SMA Plug Crimp 3pc RG59/62
- [14] **200-849** SMA Jack Crimp 3pc RG58A
- [14] **200-851** SMA Jack Crimp 3pc RG59/62
- [15] **200-853** SMA Jack Panel Receptacle



### SMA Series Adapters

Commercial Grade SMA Series Adapters



- [16] **200-858** SMA Coupler Jack-Jack
- [17] **200-860** SMA Coupler Plug-Plug
- [18] **200-862** SMA Tee Adapter Jack-Jack-Jack
- [19] **200-864** SMA Tee Adapter Jack-Plug-Jack
- [20] **200-866** SMA Angle Adapter Jack-Plug
- [21] **200-870** BNC Jack to SMA Plug
- [22] **200-872** UHF Jack to SMA Plug
- [23] **200-874** N Jack to SMA Plug
- [24] **200-876** BNC Plug to SMA Plug
- [25] **200-880** N Plug to SMA Plug
- [26] **200-882** BNC Plug to SMA Jack
- [27] **200-886** N Plug to SMA Jack



## Coaxial Products

### Economy Bulk Coaxial Cable

Economy Grade Coaxial Cable Suitable for  
MATV and Consumer Applications and  
General RF Signal Transmission  
Supplied in 1000' Reels

- [1] **200-910** RG59/U 75Ω  
22 AWG CCS Center Conductor  
Aluminum Foil Shield and  
32 x 0.12mm Aluminum Braid  
35% Braid Coverage
- [1] **200-920** RG58/U 50Ω  
20 AWG CCS Center Conductor  
Aluminum Foil Shield and  
48 x 0.12mm Aluminum Braid  
35-40% Braid Coverage
- [1] **200-930** RG6/U 75Ω  
18 AWG CCS Center Conductor  
Aluminum Foil Shield and  
48 x 0.12mm Aluminum Braid  
30% Braid Coverage

Colors Available **BK**



[1]

### Mini RG59 5-Wire Cable

- [2] **200-925** 500' Mini RG59 5-Wire Cable  
Maximum Performance Cables for  
Home Theater Use  
Space-Saving Design for Tight Applications  
Sweep Tested to 3GHz  
25 AWG **Stranded** Copper Conductors  
Stranded Copper Braid, 95% Coverage  
Red, Green, Blue, Yellow, White  
PVC Insulation Jackets  
UL Listed, NEC Type CM

### Coaxial CCTV-Cam Cable

- [3] **200-915** 500' RG59 Coaxial CCTV-Cam Cable with  
2-Conductor Power-Limited Cable  
Suitable for CCTV Installations  
20 AWG Solid Copper Center Conductor  
Copper Braid Shield, 95% Coverage  
2-Conductor 18 AWG Stranded Copper  
Flame Retardant PVC Insulation and  
Outer Jackets – Impedance 75Ω  
UL Listed – NEC Type CM, CL3

Colors Available **BK WH**



[2]



[3]



## Coaxial Products



### Series-6 Coaxial Drop Cable

High-Grade RG6/U Coaxial Cable  
 Suitable for Digital HDTV Applications, CATV and Satellite  
 Fully Sweep Tested to 3GHz  
 18 AWG Solid Conductors  
 Aluminum Foil Shield Bonded to Dielectric  
 Aluminum Braid Shield  
 17 AWG Copper-Clad Steel Ground Wire  
 Flame Retardant Lead-Free PVC Jacket, Foot-Marked  
 UV Inhibitor™ additive protects cable from sun damage

#### CCS Conductor, UL/CM

- [4] **200-929** 1000' RG6 – Spool
- [4] **200-931** 1000' RG6 – Reel in Box
- [5] **200-937** 1000' RG6-Quad – Spool

Colors Available **BK** **WH**

#### CCS Conductor, Non-UL

- [4] **200-927** 1000' RG6 – Reel in Box

Colors Available **BK** **WH**

#### Copper Conductor, UL/CM

- [4] **200-932** 1000' RG6 – Spool

Colors Available **BK** **WH**

- [4] **200-933** 1000' RG6 – Pull Box

Colors Available **BK** **GY** **WH**

- [6] **200-935** 1000' RG6 w/Ground – Spool
- [5] **200-936** 1000' RG6-Quad – Spool
- [7] **200-939** 500' RG6 Dual w/Ground – Spool

Colors Available **BK** **WH**

### Certified Series-6 Coaxial Drop Cable

High-Grade RG6/U Coaxial Cable  
 Independently Tested and Certified  
 Verified to Meet ANSI/SCTE 74 2003 and  
 SBCA Series 6 Recommended Practices  
 Suitable for Digital HDTV Applications, CATV and Satellite  
 Fully Sweep Tested to 3GHz  
 18 AWG Solid Copper or Copper-Clad Steel Conductors  
 Gas-Injected Polyethylene Dielectric  
 Aluminum Foil Shield Bonded to Dielectric  
 Aluminum Braid Shield, 60% Coverage  
 17 AWG Copper-Clad Steel Ground Wire  
 Flame Retardant Lead-Free PVC Jacket, Foot-Marked  
 UV Inhibitor™ additive protects cable from sun damage  
 Nominal Impedance 75Ω ±3Ω – Supplied in Reel in Box





#### CCS Conductor, UL/CM

- [4] **290-601** 1000' RG6 CCS Single
- [6] **290-603** 1000' RG6 CCS Single with Ground
- [8] **290-611** 500' RG6 CCS Dual
- [7] **290-613** 500' RG6 CCS Dual with Ground

#### Copper Conductor, UL/CM

- [4] **290-602** 1000' RG6 Copper Single
- [6] **290-604** 1000' RG6 Copper Single with Ground
- [8] **290-612** 500' RG6 Copper Dual
- [7] **290-614** 500' RG6 Copper Dual with Ground

Colors Available **BK** **GY** **WH**



# Coaxial Products

## Compression Termination Tools

Professional Installation of Steren PermaSeal™ and Most Compression Fittings  
 Smooth One-Cycle Full Ratchet Mechanism  
 Rugged Hardened Carbon Steel Construction  
 Black-Oxide Finish  
 Comfortable Grip Handles for Reduced Hand Fatigue  
 High-Lever Action Mechanism  
 Display Packaged for Resale

- [1] **204-001** Universal F-Fitting Compression Tool  
 Red Rubberized Grip Handles  
 Weight 16-oz.  
 Dimensions 3"(W) x 8½"(H) x 1"(D)
- [2] **204-031** Universal F RG11 Compression Tool  
 Built-in Cable Cutter  
 Yellow/Black Rubberized Grip Handles  
 Weight 16-oz.  
 Dimensions 2"(W) x 9"(H) x 1"(D)
- [3] **204-036** Universal Compression Tool  
 Terminates F, RCA, and BNC Fittings  
 Integrated Interchangeable Dies  
 Built-in Cable Cutter  
 Yellow/Black Rubberized Grip Handles  
 Weight 17-oz.  
 Dimensions 2"(W) x 9"(H) x 1"(D)
- [4] **204-034** 3-Piece Die Set for 204-036

PermaSeal™



[1]

PermaSeal™



[2]

PermaSeal™



[3]



[4]

 Resale Packaged

 **STEREN**®

## Coaxial Products

### Crimp Termination Tools

Professional Termination of RG6/11/58/59/62 Fittings  
 Rugged Hardened Carbon Steel Construction  
 Black-Oxide Finish  
 Comfortable Grip Handles for Reduced Hand Fatigue  
 High-Lever Action Mechanism  
 Display Packaged for Resale



[5] **204-004** 3-Cavity 9" Hex Crimp Tool for RG58, RG59 and RG62 Coaxial Fittings  
 Hex Die 0.256", 0.213", 0.068"  
 Full-Cycle Ratchet Mechanism  
 Yellow Grip Handles – Weight 16-oz.  
 Dimensions 2 1/2"(W) x 8 1/2"(H) x 3/4"(D)

[5] **204-005** 4-Cavity 9" Hex Crimp Tool for RG58, RG59, RG62, RG6 Coaxial Fittings  
 Hex Die 0.319", 0.256", 0.213", 0.068"  
 Full-Cycle Ratchet Mechanism  
 Red Grip Handles – Weight 16-oz.  
 Dimensions 2 1/2"(W) x 8 3/4"(H) x 3/4"(D)

[6] **204-007** 2-Cavity 9" Hex Crimp Tool for RG59, RG62, and RG6 Coaxial Fittings  
 Hex Die 0.319", 0.256"  
 Red Grip Handles – Weight 16-oz.  
 Dimensions 3"(W) x 9"(H) x 3/4"(D)

[6] **204-009** 2-Cavity 9" Hex Crimp Tool for RG59, RG6 Universal and RG11 Fittings  
 Hex Die 0.480", 0.362"  
 Star-wheel adjustable jaw-tension provides consistent crimping  
 Blue Grip Handles – Weight 16-oz.  
 Dimensions 2 1/2"(W) x 8 3/4"(H) x 3/4"(D)



### Economy Crimp Tool

[7] **204-011** 2-Cavity 8" Hex Economy Crimp Tool  
 Suitable for RG59-62-6 Fittings  
 Black Grip Handles – Weight 11-oz.  
 Dimensions 2"(W) x 8"(H) x 3/4"(D)



 Resale Packaged

# Coaxial Products

## Cable Preparation Tools

- [1] **204-200** Precision Coaxial Cable Stripper for RG58, RG59, RG62 and RG6 Clothes Pin-Style Spring Loaded – Center-Pin Cutter Fixed 3-Blade Construction Slide Cable Selection Requires no blade adjustment High-Impact ABS Plastic Construction
- [1] **204-210** Replacement Blade Cartridge for Coaxial Cable Stripper 204-200
- [2] **204-202** Precision Coaxial Cable Stripper for RG58, RG59, RG62 and RG6 Thumb Wind-Style Adjustable 2 or 3-Blade Construction High-Impact ABS Plastic Construction
- [2] **204-212** 3-Piece Replacement Blade Set for Coaxial Cable Stripper 204-202
- [3] **204-205** Precision Coaxial Cable Stripper for RG58, RG59, RG62 and RG6 Thumb-Wind Style Adjustable 2-Blade Construction High-Impact ABS Plastic Construction
- [3] **204-215** 2-Piece Replacement Blade Set for Coaxial Cable Stripper 204-205
- [4] **204-300** Economy Rotary Coaxial Cutter-Stripper for Coaxial Cables RG6, RG58, RG59 or Diameters 0.19~0.30" Requires no blade adjustment
- [5] **204-350** Coaxial Cable Cutter-Stripper Easy Clean Cut of RG59, RG6 Cables Comfort Molded Grip Plastic Handles Sharp Long-Life Hardened Steel Blades Integrated Jacket and Core Stripper Integrated Quick Connector Crimper Hardened Carbon Steel Frames Spring-Loaded for Automatic Closing Red Grip Handles – Weight 4-oz. Dimensions 1 3/4"(W) x 6"(H) x 1/4"(D)
- [6] **993-630** 6 1/2" Coaxial Cable Cutter Cleanly cuts cable up to 3/8" diameter Built-in lock for closing tool after use
- [7] **993-750** Telecom Cable Stripper and Cutter Cleanly strips UTP, coax, flat cables Cable Stops for Precise Strip Lengths Replaceable Blades High-Impact ABS Plastic Construction
- [7] **993-753** 3-Piece Replacement Blade Set for Telecom Cable Stripper-Cutter 993-750



 Resale Packaged



## Coaxial Products

### BNC Connector Crimp Kits


75Ω BNC Crimp Kit  
 Nickel-Plated Connector Bodies, Ferrules and Washers  
 Delrin Dielectric  
 Gold Plated Center Contacts  
 Includes RG58/RG59P, RG59/RG6P and RG6/RG8X ferrules



- [8] **200-123** 75Ω BNC Male with 3 Ferrules
- [9] **200-124** 75Ω BNC Female with 3 Ferrules

### Thread Protectors

Environmentally seals F-ports  
 Compresses to form seal when F-connectors are tightened onto 3/8" threaded ports

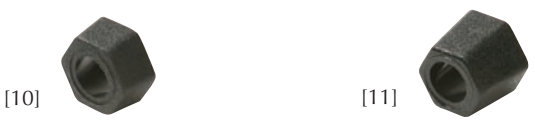

- [10] **200-958** Thread Protector, 0.25" long
- [11] **200-959** Thread Protector, 0.41" long

Colors Available **BK**

### Cable Continuity Testers

Traces runs, identifying shorts and confirming DC continuity in video, voice, data and audio cables  
 Red LED indicator lights up to identify shorts  
 Tone detector emits audible sound to confirm DC continuity  
 Right-angle head ensures ease-of-use in tight spaces  
 Detachable tone detector screws onto bottom of tester when not in use  
 Includes long-life 12V battery



- [12] **203-550** Pocket Toner
- [13] **203-560** Pocket Toner Test Kit  
 Includes F, RCA, BNC, RJ11 and RJ45 adapters  
 Toner and adapters fit into slots inside durable carrying case

### Security Shields

1 1/8" Die-Cast Metal Security Shields  
 0.58" Wall Thickness – 5/8" Diameter  
 Blocks wrench access – Protects F connectors on traps, ground blocks and converters from tampering



- [14] **200-966** 1 1/8" Metal Screw-On Shield
- [14] **200-968** 1 1/8" Metal Slip-On Shield

### Security Tool

[15] **204-400** Security Shield Tool  
 Precision Machined Nickel-Plated Steel Construction  
 7/16" socket ensures even pressure  
 Sure Grip-End and Clip Ring for Increased Tightening Leverage  
 Suitable for Use with 200-966 and 200-968 Security Sleeves

