


200-992

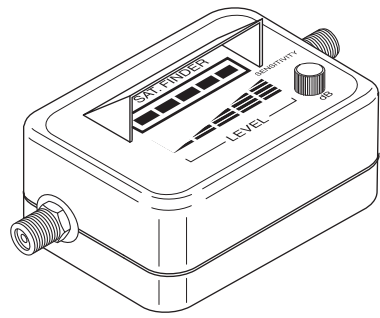


200-993


Satellite Finder Meters

Highly Sensitive Meters with Built-In Buzzer
Durable ABS Plastic Housing
Built-in Buzzer with Pitched Tone for Alignment Reference
Front Panel Sensitivity Control
RF and DC Pass-Through – 75Ω 950-2050MHz Input
Sensitivity 7mV@55dB – LNB Gain 3-Carrier C/N 15dB
Input Level -25 to -75dBm – LNB Gain 52-60dB
Power Requirements 13-18VDC
Requires 6dB attenuator for 60-65dB LNB gain

- 200-992 Analog Pocket Satellite Finder
- 200-993 LED Bar-Graph Pocket Satellite Finder

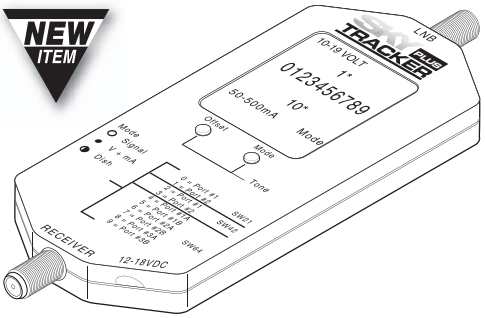


203-620

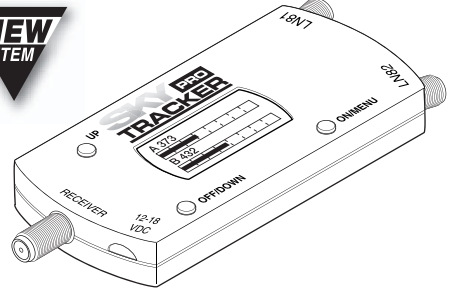


203-630

SkyTracker™ Signal Meters

Hand-Held SkyTracker™ Signal Meters
For Precise Satellite Position Location
Dish Network® and DirecTV® Compatible
Compact Design – Microprocessor Controlled
High Sensitivity for Receiving Weak Signals
Attenuation Adjustment for Strong Signals
Visual/Audio Readout for Hands-Free Operation
Precision Machined F-Connector Ports
Built-in Beeper, Volt/mA Meter
Short Circuit Protection with Fuse
75Ω Impedance – Input Frequency 950-2150MHz
Optional Accessories Kit – CE Approved

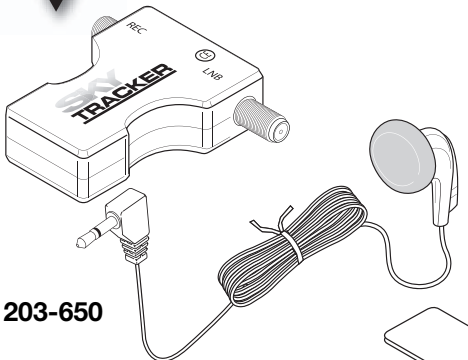

203-650

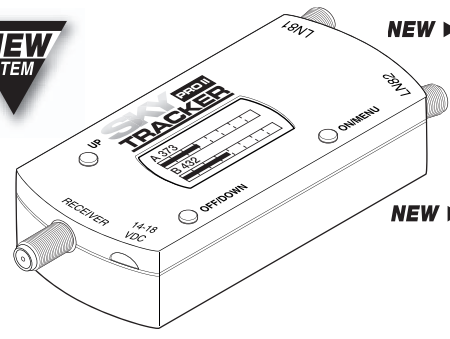

203-640 Powered

NEW ▶ 203-620 SkyTracker™ Plus Single-LNB Meter
LED and Audio Indicators
Identifies DiSEqC and 22kHz
Powered by Receiver or DC Supply
Meter Ranges 10-20V, 0-500mA
Input level 20-100 dBμV
5 3/4" (W) x 2 1/4" (H) x 3/4" (D)


NEW ▶ 203-630 SkyTracker™ Pro Dual-LNB Meter
Measures 2 LNBs simultaneously
LCDs and Selectable On/Off Tone
Identifies DiSEqC, 22kHz, 13/18V, mA
Can be set up as a two-way switch
Runs DiSEqC 1.2/SatScan actuator
Transmits 22 kHz, DiSEqC to LNB
Powered by Receiver or DC Supply
Meter Ranges 0-30V, 0-900mA
Input level 20-100 dBμV
Optional Carrying Case and Battery
5 3/4" (W) x 2 1/4" (H) x 3/4" (D)

NEW ▶ 203-640 SkyTracker™ Pro-II Dual-LNB Meter
Same as 203-630 with Internal Battery
Includes AC, cigarette lighter adapter
Includes leather case and strap
Input level 40-100 dBμV
5 3/4" (W) x 2 1/4" (H) x 1 1/2" (D)

NEW ▶ 203-635 SkyTracker™ Accessories Kit
Rechargeable External Battery Pack
AC and Car Cigarette Lighter Adapter
6' RG6 Quick Connect Patch Cable
Leather Carrying Case and Strap
Compartment for 203-620 or 203-630
9 1/2" (W) x 4 3/8" (H) x 1 7/8" (D)

SkyTracker™ Satellite Finder

NEW ▶ 203-650 SkyTracker™ Beeper Satellite Finder
Suitable for RV with Satellite Dish
Automatic Attenuation Adjustment
Pitch Tone Indicator – Includes earbud

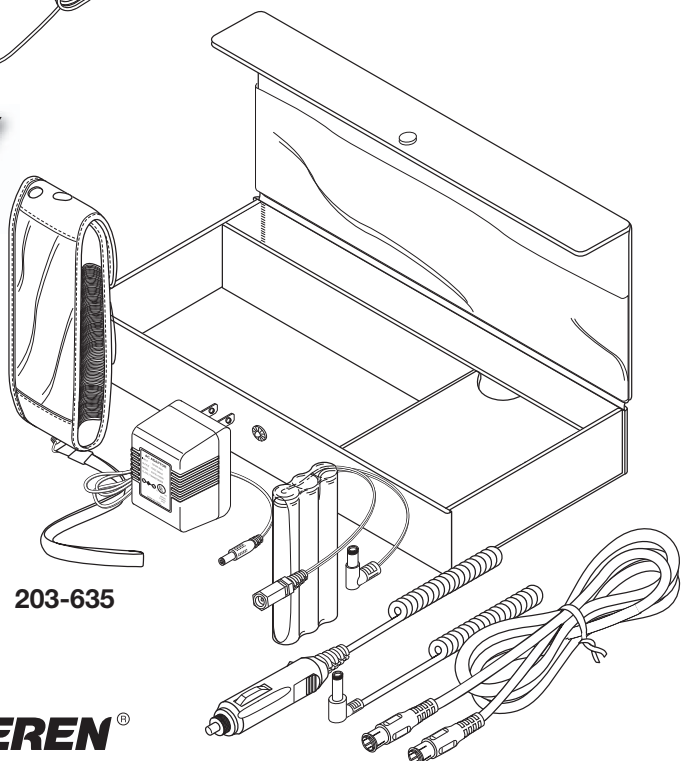

203-635