


SOCKET WELD FITTINGS CROSSES

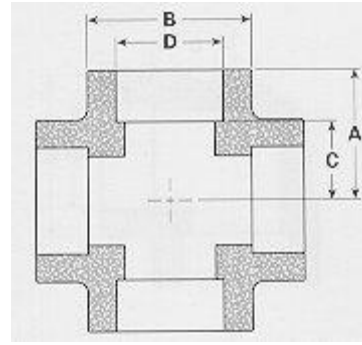

Socket Depth =

Dimension A minus Dimension C

Class 3000

Pipe Size	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
Dimension A	13/16	13/16	31/32	1 1/8	1 5/16	1 1/2	1 3/4	2	2 3/8	3	3 3/8	4 3/16
Dimension B	7/8	7/8	1 3/64	1 5/16	1 1/2	1 13/16	2 1/4	2 1/2	3 1/32	3 11/16	4 5/16	5 3/4
Dimension C	7/16	7/16	17/32	5/8	3/4	7/8	1 1/16	1 1/4	1 1/2	1 5/8	2 1/4	2 5/8
Dimension D	.420	.555	.690	.855	1.065	1.330	1.675	1.915	2.406	2.906	3.535	4.545
Approx. Wt. #	.47	.45	.34	.83	1.03	1.68	2.56	3.46	5.6	13.70	21.10	35.00

Class 6000

Pipe Size	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
Dimension A	13/16	31/32	1 1/8	1 5/16	1 1/2	1 3/4	2	2 3/8	2 1/2	3 1/4	3 3/4	4 1/2
Dimension B	7/8	1 3/64	1 5/16	1 1/2	1 13/16	2 1/4	2 1/2	3 1/32	3 5/16	4	4 3/4	6
Dimension C	7/16	17/32	5/8	3/4	7/8	1 1/16	1 1/4	1 1/2	1 5/8	2 1/4	2 1/2	2 7/8
Dimension D	.420	.555	.690	.855	1.065	1.330	1.675	1.915	2.406	2.906	3.535	4.545
Approx. Wt. #	---	---	---	1.38	2.29	3.75	4.65	8.70	9.30	18.10	24.10	38.80

Class 9000

Pipe Size	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
Dimension A	---	---	---	1 1/2	1 3/4	2	2 3/8	2 1/2	3	---	---	---
Dimension B	---	---	---	1 13/16	2 1/4	2 1/2	3 1/32	3 5/16	3 11/16	---	---	---
Dimension C	---	---	---	1	1 1/8	1 1/4	1 3/8	1 1/2	2 1/8	---	---	---
Dimension D	---	---	---	.855	1.065	1.330	1.675	1.915	2.406	---	---	---
Approx. Wt. #	---	---	---	2.50	4.12	1.12	5.12	9.44	22.19	---	---	---

[Back to Capitol's Table of Contents](#)