


PRODUCT SPECIFICATION DRAWING

HOLDRITE® #109-A-9 BRACKET

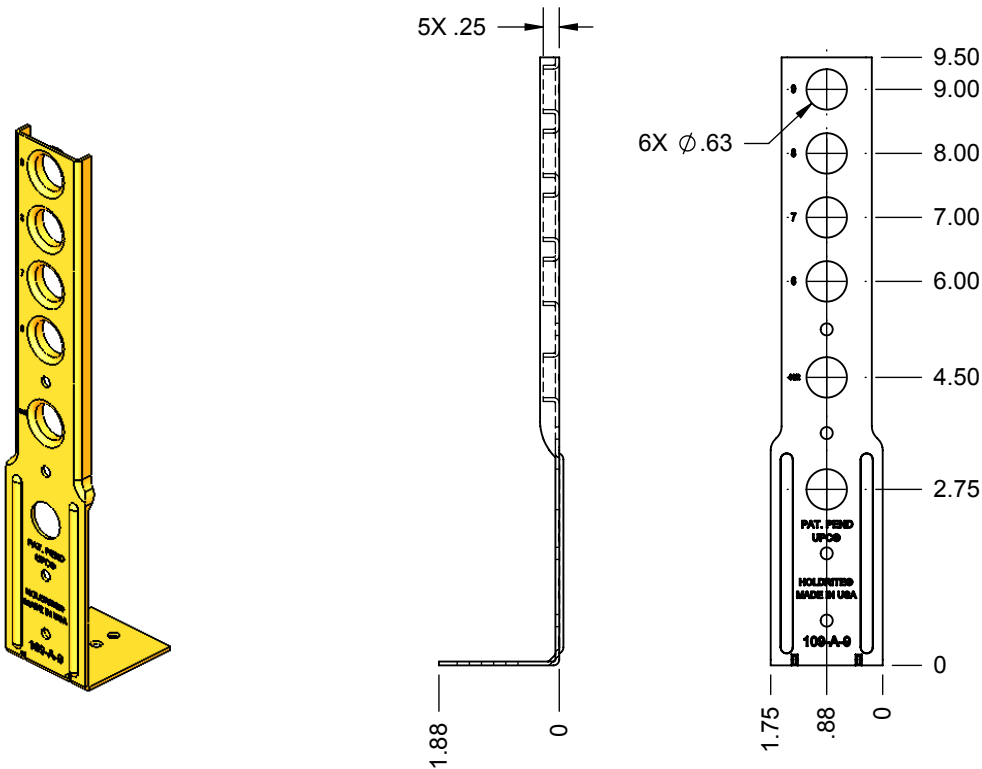


ALL DIMENSIONS IN INCHES

Positions and secures water closet supply above floor. Copper-Bonded™ heavy duty 16 gage reinforced bracket with horizontal mounting base and fastener holes. Mounts to top or face of base plate/mud sill, or under plate directly to floor. Positions and solders 1/2" CTS copper at heights up to 9". Features vertical pattern of 6 pipe holes (5 extruded): 4 on 1" centers from 6" to 9" high, plus holes at 4-1/2" and 2-3/4". Works with single or double floor plate. When soldering, heat the pipe, not the bracket.

Product Information:

- Material: 16 gage CRS per ASTM-A1008, Copper-Bonded™
- Patent pending
- UPC / IPC / IAPMO listed



Product Submittal	
Job Name:	
Date:	
Part Number:	Qty:
Architect / Owner:	
Contractor:	
Notes:	

THIS INFORMATION IS PROPRIETARY TO HUBBARD ENTERPRISES AND IS SUBJECT TO CHANGE WITHOUT NOTICE. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF HUBBARD ENTERPRISES IS PROHIBITED.

.....HUBBARD ENTERPRISES.....
HOLDRITE®
"Converting Makeshift Methods into Engineered Solutions"