


Heavy-Duty Cantilever Racking

Heavy-Duty Cantilever Racks are completely adjustable for application specific design flexibility. Long, unwelded stock is handled quickly and efficiently by forklift; instant accessibility to one piece or a full load. Arms are adjustable up and down the length of the upright wherever there are pre-drilled holes. To adjust, align arms with pre-drilled holes and bolt in. All arms feature lips to prevent product from falling off. Uprights and arms are sold separately, not in pairs. Custom rack systems can be designed for your special application.

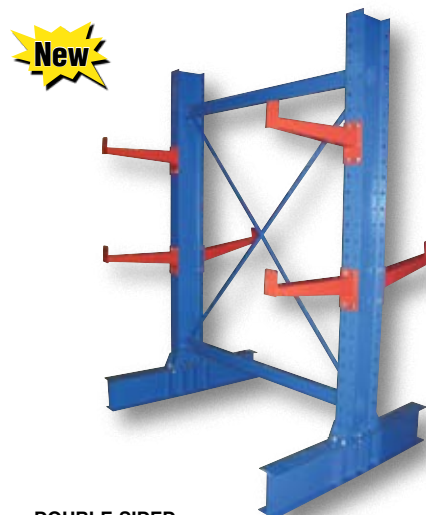

DOUBLE-SIDED
series HDU-C
(shown with arms and brace set)

SINGLE-SIDED UPRIGHTS					
MODEL NUMBER	HEIGHT	BASE	ARMS TO USE	CAPACITY (POUND)	NET WT. (POUNDS)
HU-C-8-18	96"	31"	18"	24,700	260
HU-C-8-24	96"	37"	24"	21,500	270
HU-C-8-36	96"	49"	30" / 36"	18,300 / 16,000	290
HU-C-8-48	96"	61"	42" / 48"	14,200 / 12,800	312
HU-C-10-18	120"	31"	18"	24,700	288
HU-C-10-24	120"	37"	24"	21,500	307
HU-C-10-36	120"	49"	30" / 36"	18,300 / 16,000	328
HU-C-10-48	120"	61"	42" / 48"	14,200 / 12,800	350
HU-C-12-18	144"	31"	18"	24,400	340
HU-C-12-24	144"	37"	24"	20,900	348
HU-C-12-36	144"	49"	30" / 36"	17,800 / 15,600	370
HU-C-12-48	144"	61"	42" / 48"	13,900 / 12,500	390
HU-C-14-18	168"	37"	18"	23,400	380
HU-C-14-24	168"	37"	24"	20,200	390
HU-C-14-36	168"	49"	30" / 36"	17,600 / 15,400	410
HU-C-14-48	168"	61"	42" / 48"	13,700 / 12,400	430

DOUBLE-SIDED UPRIGHTS					
MODEL NUMBER	HEIGHT	BASE	ARMS TO USE	CAPACITY (POUND)	NET WT. (POUNDS)
HDU-C-8-18	96"	53"	18"	49,400	275
HDU-C-8-24	96"	65"	24"	43,000	307
HDU-C-8-36	96"	82"	30" / 36"	36,600 / 32,000	350
HDU-C-8-48	96"	106"	42" / 48"	28,400 / 25,600	390
HDU-C-10-18	120"	53"	18"	49,200	300
HDU-C-10-24	120"	65"	24"	42,600	335
HDU-C-10-36	120"	82"	30" / 36"	36,400 / 31,600	386
HDU-C-10-48	120"	106"	42" / 48"	28,200 / 25,200	418
HDU-C-12-18	144"	53"	18"	48,800	350
HDU-C-12-24	144"	65"	24"	41,800	385
HDU-C-12-36	144"	82"	30" / 36"	35,600 / 31,200	430
HDU-C-12-48	144"	106"	42" / 48"	27,800 / 25,000	470
HDU-C-14-18	168"	65"	18"	46,800	390
HDU-C-14-24	168"	65"	24"	40,400	426
HDU-C-14-36	168"	82"	30" / 36"	35,200 / 30,800	468
HDU-C-14-48	168"	106"	42" / 48"	27,400 / 24,800	510

BRACE SETS CAN BE FOUND ON PAGE 176



STRAIGHT ARMS
series HSA-C



INCLINED ARMS
series HIA-C



HEAVY-DUTY ARMS
series HDSA-C

STRAIGHT & INCLINE ARMS				
CAPACITY (POUNDS)	LENGTH	NET WT. (LBS.)	STRAIGHT ARMS MODEL NUMBER	INCLINE ARMS MODEL NUMBER
2,500	18"	16	HSA-C-18	HIA-C-18
2,000	24"	19	HSA-C-24	HIA-C-24
1,500	30"	21	HSA-C-30	HIA-C-30
1,200	36"	24	HSA-C-36	HIA-C-36
1,100	42"	27	HSA-C-42	HIA-C-42
1,000	48"	30	HSA-C-48	HIA-C-48

HEAVY-DUTY AND EXTRA HEAVY-DUTY ARMS			
MODEL NUMBER	CAPACITY (POUNDS)	LENGTH	NET WT. (LBS.)
HDSA-C-36	2,175	36"	26
XHDSA-C-36	3,400	36"	30
HDSA-C-42	1,865	42"	29
XHDSA-C-42	2,900	42"	33
HDSA-C-48	1,630	48"	31
HDSA-C-48M	2,000	48"	33
XHDSA-C-48	2,500	48"	36