


## CB5700PL

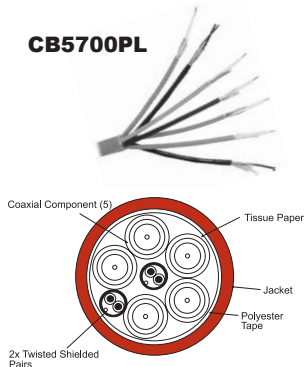

## Plenum-Flex 5 Coax + 2TP Video/Audio Cable


### Common features:

- 5 coaxes + 2 twisted pairs
- Safety approval: UL1685
- Nominal O.D.: 0.37in (9.4mm)
- Jacket color: gray
- Impedance: 75 ohms
- Shield: Tinned copper/Aluminum (In)/polyester tape
- Coax conductor: 26 AWG 7/34 tinned copper
- Twisted pairs conductor: 24 AWG 7/32 tinned copper
- Available Spool length: 500ft (152.4m) and 1000ft (304.8m)

### Multimedia

*Custom breakout cables built in 24hrs*

## CB3150PV

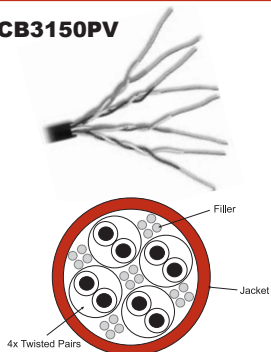

## Ultra Low Skew CAT5 Type Video Cable


### Common features:

- 4 twisted pairs
- Safety approval: UL1666
- Nominal O.D.: 0.23in (5.84mm)
- Jacket color: black
- Impedance: 100ohms
- Twisted pairs conductor: 23 AWG solid bare copper
- Available Spool length: 500ft (152.4m) and 1000ft (304.8m)

### CAT5

*Custom length CAT5 cables built in 24hrs*

## CB5600PL

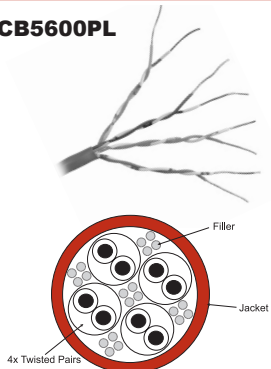

## Plenum-Flex Ultra Low Skew CAT5 Type Video Cable

### Common features:

- 4 twisted pairs
- Safety approval: UL1685
- Nominal O.D.: 0.18in (4.57mm)
- Jacket color: gray
- Impedance: 100ohms
- Twisted pairs conductor: 23 AWG solid bare copper
- Available Spool length: 500ft (152.4m) and 1000ft (304.8m)

### CAT5

*Custom length CAT5 cables built in 24hrs*