



DIPS Fittings Molded Tees



DIPS Fittings Molded Tee

Nom. Size(in)	Pipe OD(in.)	DR	Part #	Dimensions				Weight (lbs)	Shipping Method
				(L)	(H)	(FC)	(B)		
4	4.8	11	ISMFTE0411DIPS	15.63	3.88	7.82	5.42	5	FedEx
6	6.9	11	ISMFTE0611DIPS	19.34	4.5	9.67	6.22	12	FedEx
8	9.05	11	ISMFTE0811DIPS	23.15	5.17	11.58	7.06	30	FedEx
10	11.1	11	ISMFTE1011DIPS	26.5	6	13.25	7.70	50	FedEx
12	13.2	11	ISMFTE1211DIPS	31.75	7.5	15.88	9.28	80	FedEx

DIPS Fittings Fabricated Tees - Three Segment

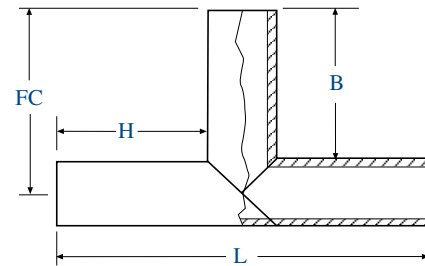

DIPS Fittings Fabricated Tees - Three Segment

Nominal Size(in)	Pipe OD(in)	DR	Part #	Dimensions				Weight (lbs)	Shipping Method
				L(in)	H(in)	FC(in)	B(in)		
8	9.05	11	ISFFTE0811DIPS	48.0	19.475	24	19.475	52	FedEx
10	11.1	11	ISFFTE1011DIPS	48.0	18.45	24	18.45	77	FedEx
12	13.1	11	ISFFTE1211DIPS	48.0	17.45	24	17.45	108	FedEx
14	15.3	11	ISFFTE1411DIPS	48.0	16.35	24	16.35	142	LTL
16	17.4	11	ISFFTE1611DIPS	48.0	15.3	24	15.3	181	LTL
		17	ISFFTE1617DIPS	"	"	"	"	121	"
18	19.5	11	ISFFTE1811DIPS	48.0	14.25	24	14.25	223	LTL
		17	ISFFTE1817DIPS	"	"	"	"	150	"
20	21.6	11	ISFFTE2011DIPS	48.0	13.2	24	13.2	270	LTL
		17	ISFFTE2017DIPS	"	"	"	"	181	"
24	25.8	11	ISFFTE2411DIPS	54	14.1	42	29.1	522	LTL
		17	ISFFTE2417DIPS	"	"	"	"	351	"
30	32	11	ISFFTE3011DIPS	62	15	42	26	850	LTL
		17	ISFFTE3017DIPS	"	"	"	"	571	"

DIPS HDPE Fittings

See previous page for Pressure Rating for Molded Fittings.

Pressure Rating of Fab Tee is based pipe DR (Wall thickness) and resin properties.

Tees from 3608 resin:	
DR	Pressure Rating
7	200 psi
9	150 psi
11	120 psi
13.5	83 psi
15.5	72 psi
17	65 psi
21	52 psi
26	42 psi
32.5	33 psi

Tees from 4710 resin:	
DR	Pressure Rating
7	252 psi
9	189 psi
11	152 psi
13.5	105 psi
15.5	90 psi
17	82 psi
21	66 psi
26	53 psi
32.5	42 psi

Note: Size/DR listings shown are commonly requested. Many DR options not listed are available. Please consult an ISCO representative for availability.

1-800-345-ISCO

www.isco-pipe.com

