



F1210C


FLOOR DRAIN FOR MEMBRANE FLOOR AREAS

Internet address: www.mifab.com

Toll Free: 1-800-465-2736

Canada Toll Free: 1-800-387-3880

SPECIFICATION: MIFAB Series F1210C-4-49 lacquered cast iron floor drain with anchor flange, cast iron clamp ring with weepholes for waterproofing membrane, and standard polished chrome plated strainer.

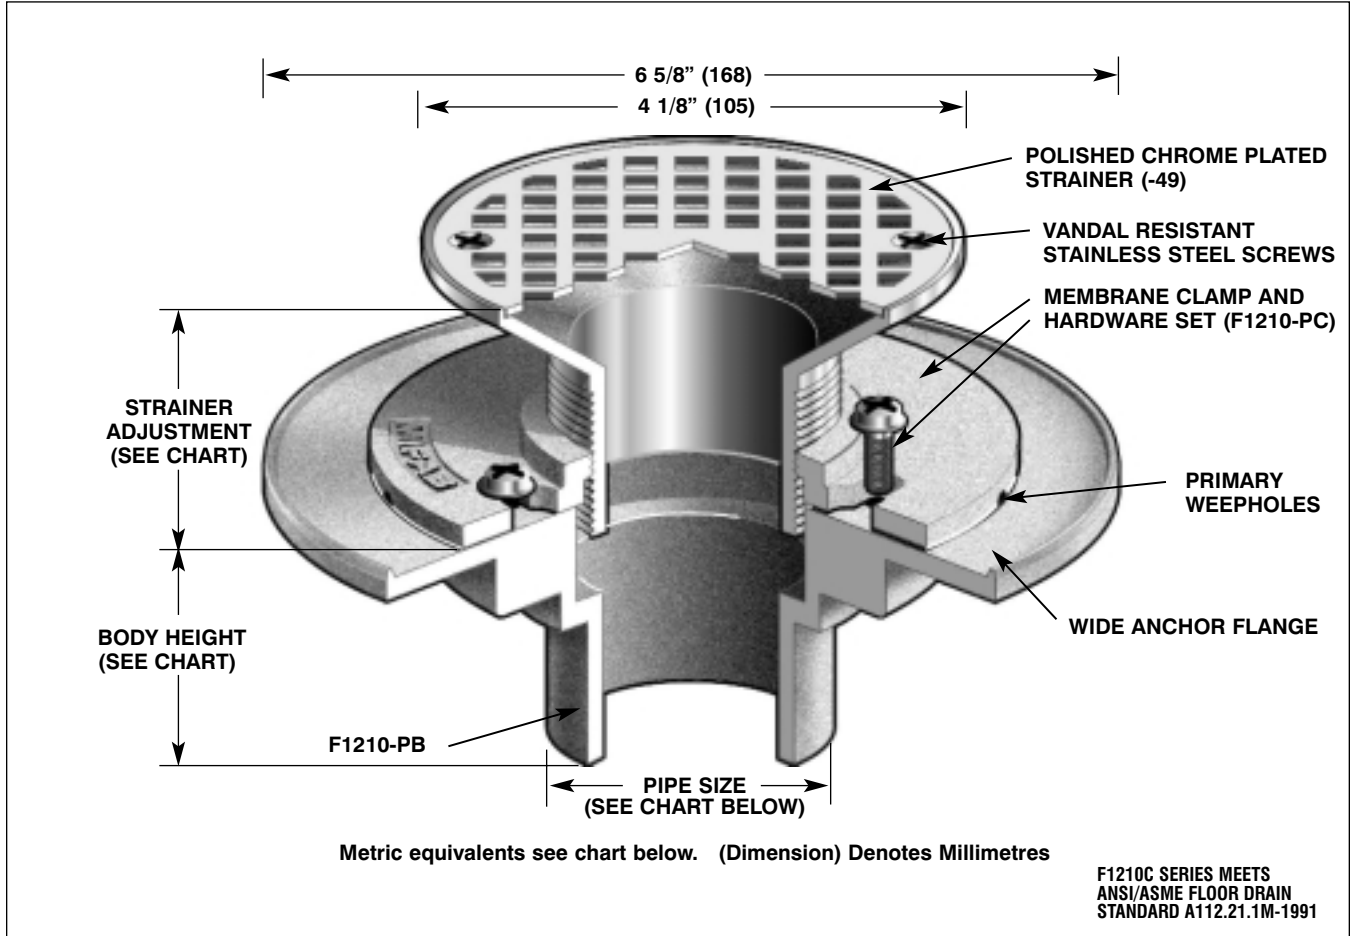

STRAINER DIAMETER	PIPE SIZE	STRAINER ADJUSTMENT		ANSI/ASME RATING		PIPE SIZE	BODY HEIGHT	
		MIN	MAX	FREE AREA	LOAD RATING		NO HUB	THREADED (T)
4 1/8" (105)	2" (50)	1 3/8" (35)	2 1/2" (63)	5.0 in ² (3226 ²)	UP TO 2,000 LBS.	2" (50)	2 5/16" (59)	2 5/16" (59)
	3" (75)	1 1/4" (32)	2 1/4" (57)			3" (75)	2 5/16" (59)	—
	4" (100)	1 1/8" (29)	2 1/4" (57)			4" (100)	2 5/16" (59)	—

OPTIONAL VARIATIONS:

- | | | | |
|---|------------|---|------------|
| <input type="checkbox"/> Nickel bronze | suffix -1 | <input type="checkbox"/> Polished chrome plated strainer (standard) | suffix -49 |
| <input type="checkbox"/> Polished bronze | suffix -2 | <input type="checkbox"/> 4" Round funnel | suffix -F4 |
| <input type="checkbox"/> 3M epoxy finish | suffix -3M | <input type="checkbox"/> 6" Round funnel | suffix -F6 |
| <input type="checkbox"/> Vandal proof | suffix -6 | <input type="checkbox"/> Oval 4" x 9" funnel | suffix -G |
| <input type="checkbox"/> Acid resistant epoxy coating | suffix -11 | <input type="checkbox"/> 6" x 3" x 1" funnel | suffix -J |
| <input type="checkbox"/> All galvanized | suffix -13 | <input type="checkbox"/> Threaded outlet | suffix T |


PARTS:



F1210-PB



4-49



F1210-PC