


Aquaseal Cables

WEST PENN WIRE

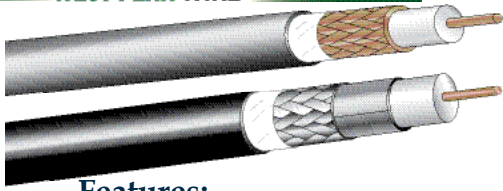

Aquaseal® Water Blocking Cable Coaxial Cables / Pro-Video- CATV - CCTV

Applications:

Indoor/Outdoor:

- CCTV Security
- SDI - Pro-Video
- MATV/CATV


Features:

- NEC Type CM
- Waterblocking Tape

Mechanical Specifications

Standard spool size 1000ft.

Catalog No.	Conductor Type & Nom. D.C.R	Nominal O.D	Insulation Type, O.D.	Shielding % Coverage	Jacket Type	Jacket Colors	NEC Type	Jacket Color
		Inches	Inches					
AQC819	20 AWG Solid BC 10 Ω/M'	.242	Gas Injected PE .142	Waterblocking tape + Bifoil 100% TC Braid 95%	Sunlight Resistant PVC	Black	CM	Black
						Connectors 75Ω 3 Pc. BNC - CN-BM73-2 75Ω Compression BNC - CN-CSBNC-59		
AQC815	20 AWG Solid BC 10 Ω/M'	.242	Gas Injected PE .142	Waterblocking tape + Bare Copper Braid 95%	Sunlight Resistant PVC	Black	CM	Black
						Connectors 75Ω 3 Pc. BNC - CN-BM73-2 75Ω Compression BNC - CN-CSBNC-59		
AQC841	18 AWG Solid BC 6.5 Ω/M'	.275	Gas Injected PE .180	Waterblocking tape + Bifoil 100% + Al. Braid 65%	Sunlight Resistant PVC	Black	CM	Black
						Connectors "F" Type- CN-F56AQ "F" Compression - CN-FSNS-6		
AQC806	18 AWG Solid BC 6.5 Ω/M'	.280	Gas Injected PE .180	Waterblocking tape + Bare Copper Braid 95%	Sunlight Resistant PVC	Black	CM	Black
						Connectors 75Ω 3 Pc. BNC - CN-BM73-5 75Ω Compression BNC - CN-CSBNC-6		
AQC2806	18 AWG Solid BC 6.5 Ω/M'	.280 x .580	Gas Injected PE .180	Waterblocking tape + Bare Copper Braid 95%	Sunlight Resistant PVC Black- Lickity Split	Black	CM	Black
						Connectors 75Ω 3 Pc. BNC - CN-BM73-5 75Ω Compression BNC - CN-CSBNC-6		



CableConstruction:
1 Coax unit plus 1 pair 16 AWG Unshld.

AQC2806- Lickity Split Design

Electrical Specifications:

See Coaxial Cable Section for Electrical Specifications